

# Works Access Permit

Registration Number: **E991183**

Utility Reference: **Global - Non Excavation**



## 1. Details of Proposed Work

Activity: Asset Inspections/Maintenance, Chambers Access, Drainage Works, Manhole Maintenance, Meter Maintenance, Survey, Other (Specify Detail)

Address: 30 Laings Road, Lower Hutt Central, Lower Hutt, 5040

Location in road: Carriageway, Footpath, Berm, Nature Strip

WAP valid period: 01 January 2024 to 31 December 2024

## 2. The Parties

Hutt City Council being a body corporate in accordance with the Local Government Act 2002 ('the Corridor Manager;')

Wellington Water Alliance being an approved Utility Operator in accordance with Local Government Act 2002 submitting a request for access in accordance with that act;

Wellington Water Alliance being the agent of the Utility Operator submitting this request on behalf of the Utility Operator and in accordance with the Utility Operator's statutory rights ('the Applicant').

## 3. Attachments

Attachment 1 being the Schedule of Reasonable Conditions.

Attachment 2 being plan TMP showing the agreed service location.

## 4. Background

(a) The Utility Operator wishes to carry out the works stated on CAR Number E991183 and thereafter maintain the utility services established in the corridor;

(b) The Corridor Manager is required to provide a written consent in accordance with its governing legislation and to provide a schedule of reasonable conditions, if required, by the utility legislation under which the request for access has been made; and

(c) In accordance with the Code: Utilities' Access to the Transport Corridors and on behalf of the Corridor Manager, I give my written consent for access to the corridor at the agreed location and attach my schedule of reasonable conditions:

(d) In the case of State highways this Works Access Permit serves as the approvals required under sections 51 and 78 of the Government Rounding Powers Act.

Signed

Date 19/12/2023

Kara Collins acting pursuant to delegated authority.

FOR Corridor Manager APPROVAL USE ONLY

Time Spent Processing:

Approved Contractor

Route Plan Submitted

TMP Submitted

Stockpiling Arrangements

**APPROVED**

CAR E991183  
Kara Collins  
STMS Number 128595  
Hutt City Council

19 December 2023

# CONDITIONS


## Special Conditions

1. Conditions/TMP/Permit must be adhered too at all times, TMP,WAP and conditions are to be keep on site at all times via paper copies or downloaded to a site tablet. Failure to do so may result in a NCN or a stop work notice being issued.
2. Non-Excavation work only.
3. Clash of works check, please ensure to check for clashes on the planning map and contact the other party to ensure you can have access to the site, if not, please plan the works to suit the allowed date/s.
4. **No works are to take place on weekends, public holidays, or during the Christmas brownout period unless prior approval is given by the Operations Corridor Manager or the delegated authority of the Operations Corridor Manager.**

## General Conditions

5. The Utility Operator must:
  - (a) carry out all Work in Transport Corridors in accordance with the Code and KiwiRail's Specifications for Working in Railway Corridors;
  - (b) undertake all Works in compliance with the Acts of Parliament and mandated codes of practice that relate to their industry and the type of Work described within the plans and methodology submitted;
  - (c) install assets more or less in the location shown on the attached plans, and agree the exact location and position with the Road Corridor Manager before Work commences;
  - (d) locate any Utility Structures in the Road Corridor in the agreed position shown on the drawings and clear of the Carriageway, Road Corridor furniture and kerbs, drains, manholes, etc. Utility Structures agreed to be within the trafficable part of the Road are to be flush with the surface and designed to withstand full heavy Traffic loading (NZTA's HN-HO-72 Traffic Loading);
  - (e) provide a full description of the construction methodology, reinstatement, resurfacing and compaction and agree this with the Road Corridor Manager prior to Work commencing;
  - (f) make the Works available at all times for inspection by any person representing the Road Corridor Manager;
  - (g) if requested, pay the reasonable costs of the Road Corridor Manager in connection with the processing of this notice and for the monitoring and auditing of the Works; (See NZ Transport Agency Cost Structure under Clause 23)
  - (h) keep a full copy of the Works Access Permit/ Permit to Enter and Reasonable Conditions on the Work Site at all times during the Works;
  - (i) undertake remedial action on non-conforming Work within the timeframe set by the Road Corridor Manager, where reasonable and practicable;
  - (j) gain all the necessary consents, approvals and permits from the relevant statutory and regulatory authorities at its own cost;
  - (k) keep plans of the installed Work and make them available to the Railway Corridor Manager (in all cases) and Road Corridor Manager (on request);
  - (l) compensate the Road Corridor Manager for any damage or costs incurred to the Road

**CAR Number:** E991183

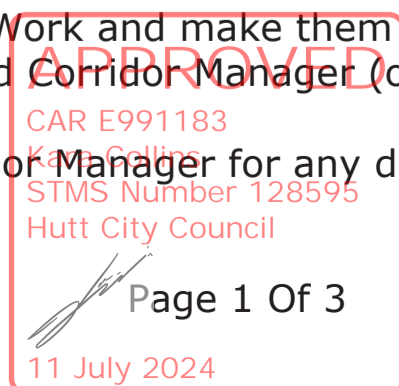

Corridor due to the Work or for costs resulting from the removal of abandoned installations, Utility Structures, components and equipment that belong to the Utility Operator;

(m) repair all Road Corridor assets damaged as a result of the Works, should the Road Corridor Manager determine these are necessary prior to the end of the Warranty period;

(n) restore to their original condition any surface or Utility Structure that was damaged or removed as a result of the Works;

(o) control the surface water channels so as to cause minimal interference to existing flows;

(p) fully restore the surface water channels at the completion of the Works;

(q) notify the Road Corridor Manager of any maintenance Work it proposes to undertake within the two-year Warranty period;

(r) have in place an approved TMP for Roads and Motorways at least two days prior to Work commencing on the Work Site;

(s) provide the Road Corridor Manager with two Working Days' notice before commencement of Work on the Work Site;

(t) ensure that the Work is carried out under the control of a warranted supervisor as required by the Code of Practice for Temporary Traffic Management and ensure that there are sufficient people on site specifically to control the flow of Traffic through the site in accordance with the TMP;

(u) comply with instructions from an officer of the NZ Police Traffic Safety Branch or a duly authorised agent of the Road Corridor Manager in respect of Traffic management and safety;

(v) complete Works in the Road Corridor in one continuous operation (suspension of Works over five continuous days requires the prior written permission of the Road Corridor Manager);

(w) protect and maintain all Road Corridor signs, markers, signals, barriers and associated marking and replace them to the appropriate industry standard where they have been damaged by the Works;

(x) complete and submit a Works Completion Notice form when the Works are complete; and

(y) stop Work as necessary to meet the requirements of section 42 of the Heritage New Zealand Pouhere Taonga Act 2014.

6. Work must not take place on or near a State highway during and one day either side of a public holiday or public holiday weekend.
7. Where otherwise required due to Traffic volumes or specific residential or Central Business District requirements, the hours of Work must be as specified in the Local Conditions and Special Conditions.
8. The Warranty period starts from the date the Road Corridor Manager has given signed acceptance that the Work is complete or otherwise as provided in Section 4.7.1.7 of the Code.
9. Unless the Works stated in the WAP have started on the Work Site, the agreement relating to the Works will only remain valid for six months from the date of approval on the Works Access Permit.
10. The Road Corridor Manager must manage all applications relating to Road Corridor access in

**CAR Number:** E991183



accordance with the timeframes and processes in the Code.

11. The Corridor Manager may:

(a) assess the suitability of any action proposed by the Utility Operator during the Warranty period and impose Reasonable Conditions that will maintain the integrity of the Road assets;

(b) arrange for remedial Work to be done and recover the costs incurred from the Utility Operator, if the Utility Operator fails to take action within the agreed timeframe; and

(c) instruct the Utility Operator to stop Work and leave the Work Site (having made the site safe) if the Works are not complying with the relevant Reasonable Conditions including any plans, relevant conditions or specifications contained in the Code, or permission requirements.

12. In granting this WAP, no vested right is created.

13. This WAP is not transferable without the written permission of the Road Corridor Manager.

### **Local Conditions**

**CAR Number:** E991183



**CAR HCC Full Scope of Works Utility  
Utility**

Company	Wellington Water
Contract Manager	Tim Harty
Phone	021 451 104
Email	Tim.harty@wellingtonwater.co.nz

**Contractor**

Company	Wellington Water alliance
Contract Manager	Valitha Roos
Phone	021 510 923
Email	Valitha.roos@wellingtonwater.co.nz

**Sub Contractor**

Company	
Name	
Phone	
Email	

Type of Work (Tick)					<b>Minor Non-Excavation</b>	x
Location Road (Tick)	Carriageway	x	Footpath	x	Berm	x

**Work Location**

Physical Address	Various Locations / Streets within Hutt City Region
------------------	---

**Work Programme**

Start Date	01/01/2024	Completion Date	31/12/2024
Duration of Work	24/7	Day / Night	366

**Hours of work**

Start Time		Finish Time	
------------	--	-------------	--

**Description of Activity**

**Non excavation works not needing site specific:**

- All work carried out may involve having 1 to 2man onsite including sub-contractors.

**ALL ROAD CLOSURES MUST HAVE RCA / TMC APPROVAL**

**All Night Works must have Noise Control Approval before the work can start.  
6:00pm – 7:30am Mon-Sat, All time Sunday & Public Holidays**

**Note: All project works, or other work not covered under the Generic Tmp / Tmd will need site specific.**

**Confirmation is required from RCA to see if Generic covers main arterial roads or suburban shopping areas, Site Specific TMP maybe required.**

**Only approved contractors listed on Tmp are covered under Global Car.**

**ALL CONTRACTORS ARE TO NOTIFY THE RCA PRIOR TO CARRY OUT THEIR WORK ACTIVITY.**

**This work will cover inspections / maintenance / locates that can be completed on the same day.**

- Locating council assets.
- Investigate any leaks to determine what may be required to carry out any repairs.
- Poor water quality needing to flush hydrants.
- Operation of hydrants and valves on the same day.
- Hydrant painting carried out annually.
- Flow meter testing, need to access chamber to carry out test.
- Leak detection surveys carried out by approved contractors AD Riley and Detection Services to locate leaks.
- Utility asset mark outs.
- 3 Water asset mark outs.
- Meter reading - check if any issues with meters and carry out final readings.
- CCTV inspections.
- Checking condition of Wastewater / Stormwater assets.
- Smoke / Dye testing on Wastewater / Stormwater assets to identify inflow sources, defects and cross connections, this work can take between 2 – 4 hours and will cover set locations in each suburb.
- Installation and maintenance of monitoring equipment into manholes to measure flow and overflows from the Wastewater network.
- Lifting manhole covers to check assets running clear.
- Clearing Wastewater / Stormwater blockages.
- Regular hydrant flushing takes approx. 15 mins until run clear cleaning the lines.
- Regular fortnightly / monthly flushing for the 3 waters that can be completed within 3 to 6 hours.
- Culvert / intake clearing removing debris / trash that may impede the flow of water.
- Annual pit cleaning to prevent blockages and potential overflows, duration will take no longer than 1.5 hours between 1am to 5.30am.  
No work will be carried out on main arterial roads between 6am to 9am.

**Crews and Sub contractors must adhere to the following:**

- Ensure proper traffic and pedestrian management is in place.
- Set up correct Tmd to suit the work site.
- Safety induction is carried out as per RCP process.
- Ensure safety is always adhere to.
- Ensure all efforts are made to minimise disruption to residents, business, and pedestrians.
- Make sure relevant documents are onsite.
- Provide photos showing a wide street view of location.
- Photos of Work carried out.
- Clear notes of what work was carried out.
- Site is packed up and left clean and tidy.
- No car will need to be logged in Submitica when carrying out inspection work on same day.

**Work Vehicles onsite at various stages of work but not limited to:**

**Standard work crew:**

1 to 2 service vehicles equipped with beacons onsite along with any small plant and equipment to carry out inspections. Crews to set up own Tmd.

**Service crews are equipped to set up the following Tmd's only.**

**Traffic management will be required if you do not carry correct signage.**

CC1	F2.1
CC2	F2.2
CC3	F2.5
CC4	F2.6
CC5	F2.7
CC7	J2.16A
CC8	F4.10
CC9	ATMS07
CC10	
CC11	
CC12	

**Sub-contractors are to follow the Tmd criteria above, or if you do not have correct signage to set up own Tmd. Any Tmd not listed above will require external traffic management.**

**Extended crew when needed:**

- Traffic management vehicles if unable to set up own traffic.
- Hydro Vac Truck / Digger / Jet Flusher maybe utilised.

**Site Specific TMP required depending on the work activities and impact. Works include:**

- **Entry to access Three Water Assets located at a major intersection, or within a live lane that will impact traffic flow.**
- **All works within KiwiRail property, prior approval is required.**
- **Road closures.**

**Quantities of proposed Work (use meters, items, hours and minutes to indicate);**

Length of trenching		Number of Cabinets/pedestals effected	
Length of Horizontal/Vertical Drilling		Number of Structures effected (fully explain in description of work)	
Number of holes		Number of assets removed	
Number of Chamber/s effected		Duration of Road / Lane Closure (circle) Hours / Days	
Number of Poles/Posts/Piles effected		Duration of Footpath diversion (circle) Hours / Days	
Number of Car parks/bus stop/taxi stands affected for more than two hours		Duration of property access restricted (circle) Hours / Days	

# Health and Safety Policy



## Our Purpose |

Creating excellence in regional water services for healthy communities

## Our Vision

Our people, suppliers and affected parties go home healthy and safe

## Our Beliefs

- Health and safety is our top priority
- We look after ourselves; everyone takes personal responsibility for their own health and safety
- We look out for each other, suppliers and the public; we make sure everyone is safe
- Wellington Water takes a methodical approach to health and safety; we continuously review our systems to ensure they are up-to-date and ensure that health and safety is foremost in infrastructure planning and design
- We're committed to health and safety at all times; nobody walks past an unsafe activity or work site - we make it safe

## Our Commitments

### Leadership

- We make sure our people work in a safe environment
- We make sure our work sites are safe for suppliers, neighbours and the general public
- We empower our people to manage health and safety in all situations and to stop unsafe acts as they happen; we make sure there's a safe working environment before work continues
- We proactively identify and manage hazards and ensure safe behaviour
- We support the safe and early return to work of any of our people who are injured or sick, and support and follow up on anyone who is injured on a Wellington Water site
- We recognise staff and suppliers who practice excellence in health and safety

### Systems

- We make sure our people have the training, skills and resources to work safely
- We ensure infrastructure managed by Wellington Water is designed, constructed, operated and maintained safely, and will remain safe for our people, suppliers and the community
- We accurately record, investigate and report incidents and learn from them
- We monitor our health and safety performance and that of our suppliers as a basis for continuous improvement and identifying new and safer ways of working

### Working with others

- Our suppliers are required to commit to our vision of our people and suppliers going home healthy and safe
- We make sure all suppliers working on behalf of Wellington Water have high quality health and safety systems in place

### place

- We comply with and exceed all relevant legislation, regulations, codes of practice and industry standards
- We interpret health and safety broadly and work with all stakeholders to achieve our health and safety vision

A handwritten signature in black ink, appearing to read 'Colin Cameron'.

COLIN CAMERON  
CHIEF EXECUTIVE





# Living Safely Policy

## People at the heart of everything we do

Living safely is how we go about every aspect of our lives; all day, every day. It is more than work, it is about integrating our work, home and interests, our desire to get the best out of life, and to be the best we can. It is recognising our strengths and weaknesses, and making positive choices that benefit our wellbeing and way of life, including those of others in the communities in which we live and work.

### We will:

- Demonstrate our commitment through active and visible leadership
- Abide by a simple safety management system that encourages health and safety ownership by each and every individual
- Incorporate health and safety into the way we design, plan and do our work
- Work collaboratively with our subcontractors to meet the required health and safety standards
- Enhance our health and safety skills and behaviours through training and development
- Foster a culture of reporting, learning and sharing
- Be empowered to maintain a safe and healthy workplace
- Promote a positive health and wellbeing mindset
- Meet or exceed relevant standards and legal requirements
- Set measurable objectives and targets to ensure continual improvement



C W Bruyn  
Managing Director

# ROAD SPACE BOOKING

<b>Address:</b>			
<b>Contractor:</b>			
<b>Dates &amp; Times (attended):</b>	<b>From:</b>		<b>To:</b>
<b>Dates &amp; Times (unattended):</b>	<b>From:</b>		<b>To:</b>
<b>Generic TMP used:</b>			
<b>Diagram (s) used:</b>			
<b>CAR #</b>			
<b>Work Activity and Reasons TTM to remain in place:</b>			
<b>Contractor Name:</b>			
<b>Contractors Signature:</b>			
<b>TMC Approval:</b>			

Please attach photos of site active site set up (these photos are to include both ends of the site (inclusive of any side roads), pedestrian/cycle management and the working area.

**TRAFFIC MANAGEMENT PLAN (TMP) – FULL FORM**

*Use this form for complex activities. Refer to the NZ Transport Agency's Traffic control devices manual, part 8 Code of practice for temporary traffic management (CoPTTM), section E, appendix A for a guide on how to complete each field.*

Organisations /TMP reference	TMP reference: ATMS 2023-381 V2	Contractor (Working space): As per attached list	Principal (Client): Wellington Water		
		Contractor (TTM): As per attached list	RCA: Hutt City Council		
Location details and road characteristics	Road names and Suburb		House no./RPs	Road level	Speed Limit
	Various within the Hutt City Region		From and to		
Traffic details (main route)	AADT	Peak flows			
	Various	AM	Start 5:30am	End 9:00am	
		PM	4:00pm	7:00pm	

Description of work activity

1 Non excavation works not needing site specific:

All work carried out may involve having 1 to 2 man onsite including sub-contractors.

**ALL ROAD CLOSURES MUST HAVE RCA / TMC APPROVAL**

All Night Works must have Noise Control Approval before the work can start.  
6:00pm – 7:30am Mon-Sat, All time Sunday & Public Holidays

Note: All project works, or other work not covered under the Generic Tmp / Tmd will need site specific.

Confirmation is required from RCA to see if Generic covers main arterial roads or suburban shopping areas. Site Specific TMP maybe required.

Only approved contractors listed on Tmp are covered under Global Car.

**ALL CONTRACTORS ARE TO NOTIFY THE RCA PRIOR TO CARRY OUT THEIR WORK ACTIVITY.**

This work will cover inspections / maintenance / locates that can be completed on the same day.

- Locating council assets.
- Investigate any leaks to determine what may be required to carry out any repairs.
- Poor water quality needing to flush hydrants.
- Operation of hydrants and valves on the same day.
- Hydrant painting carried out annually.
- Flow meter testing, need to access chamber to carry out test.
- Leak detection surveys carried out by approved contractors AD Riley and Detection Services to locate leaks.
- Utility asset mark outs.
- 3 Water asset mark outs.
- Meter reading - check if any issues with meters and carry out final readings.
- CCTV inspections.
- Checking condition of Wastewater / Stormwater assets.
- Smoke / Dye testing on Wastewater / Stormwater assets to identify inflow sources, defects and cross

**APPROVED**  
CAR E991183  
18 December 2023  
18 December 2023

connections, this work can take between 2 – 4 hours and will cover set locations in each suburb.

- Installation and maintenance of monitoring equipment into manholes to measure flow and overflows from the Wastewater network.
  - Lifting manhole covers to check assets running clear.
  - Clearing Wastewater / Stormwater blockages.
  - Regular hydrant flushing takes approx. 15 mins until run clear cleaning the lines.
  - Regular fortnightly / monthly flushing for the 3 waters that can be completed within 3 to 6 hours.
  - Culvert / intake clearing removing debris / trash that may impede the flow of water.
  - Annual pit cleaning to prevent blockages and potential overflows, duration will take no longer than 1.5 hours between 1am to 5.30am.
- No work will be carried out on main arterial roads between 6am to 9am.

Crews and Sub contractors must adhere to the following:

- Ensure proper traffic and pedestrian management is in place.
- Set up correct Tmd to suit the work site.
- Safety induction is carried out as per RCP process.
- Ensure safety is always adhere to.
- Ensure all efforts are made to minimise disruption to residents, business, and pedestrians.
- Make sure relevant documents are onsite.
- Provide photos showing a wide street view of location.
- Photos of Work carried out.
- Clear notes of what work was carried out.
- Site is packed up and left clean and tidy.

Vehicles onsite at various stages of work but not limited to:

Standard work crew:

1 to 2 service vehicles equipped with beacons onsite along with any small plant and equipment to carry out inspections. Crews to set up own TMD.

Service crews are equipped to set up the following Tmd's only.

Traffic management will be required if you do not carry correct signage.

CC1	F2.1
CC2	F2.2
CC3	F2.5
CC4	F2.6
CC5	F2.7
CC7	J2.16A
CC8	F4.10
CC9	ATMS07
CC10	
CC11	
CC12	

Sub-contractors are to follow the TMD criteria above, or if you do not have correct signage to set up own TMD. Any TMD not listed above will require external traffic management.

Extended crew when needed:

- Traffic management vehicles if unable to set up own traffic.
- Hydro Vac Truck / Digger / Jet Flusher may be utilised.

APPROVED  
CAR E991183  
Jason Wildman  
STMS Number 307 43  
Hutt City Council  
18 December 2023

Site Specific TMP required depending on the work activities and impact. Works include:

- Entry to access Three Water Assets located at a major intersection, or within a live lane that will impact traffic flow.
- All works within KiwiRail property, prior approval is required.
- Road closures.

**APPROVED**

CAR E991183  
Jason Wildman  
STMS Number 307 43

Hutt City Council

*Jason Wildman*  
Page 3

18 December 2023

Planned work programme							
Start date	01/01/2024	Time	See Below	End date	31/12/2024	Time	See Below
Consider significant stages, for example:	<p style="text-align: center;"><i>Residential Roads</i></p> <p style="text-align: center;"><i>Installation: 7:00am – 7:30am or whenever site is installed.</i></p> <p style="text-align: center;"><i>Site Active: 7:30am – 17:30pm</i></p> <p style="text-align: center;"><i>Site Removal: 17:30pm – 18:00pm</i></p> <p style="text-align: center;"><b>NIGHTWORKS ARE NOT PERMITTED IN RESIDENTIAL AREAS</b></p> <p style="text-align: center;"><i>Main Road</i></p> <p style="text-align: center;"><i>Installation: 9:00am -9:30am or whenever site is installed</i></p> <p style="text-align: center;"><i>Site Active: 9:30am – 15:30pm</i></p> <p style="text-align: center;"><i>Site Removal: 15:30pm – 16:00pm</i></p> <p style="text-align: center;"><i>Installation: 19:00pm – 19:30pm or whenever site is installed</i></p> <p style="text-align: center;"><i>Site Active: 19:30pm – 5:00am</i></p> <p style="text-align: center;"><i>Site Removal: 5:00am – 5:30am</i></p> <p style="text-align: center;"><i>Works near schools</i></p> <p style="text-align: center;"><i>No work to be completed between school drop off &amp; pick up times:</i></p> <p style="text-align: center;"><i>Between 8.30am – 9.30am &amp; 2.30pm – 3.30pm</i></p> <p style="text-align: center;"><i>This TMP is to cover 1 day attended non - excavation works.</i></p> <p><b>Road Space Booking MUST include:</b></p> <ul style="list-style-type: none"> <li>• Location/Address</li> <li>• Dates/Times of works – attended</li> <li>• TMP &amp; Diagram(s) used</li> <li>• Reasons for works/TTM remaining in place, longer than 1 day</li> <li>• Photos of the active site set up (these photos are to include both ends of the site (inclusive of any side roads), pedestrian/cycle management and the working area.</li> </ul> <p><i>A site specific TMP <b>maybe</b> required for/when:</i></p> <ul style="list-style-type: none"> <li>• <i>The generic TMD does not suit/fit the site</i></li> <li>• <i>A road closure or one way system (partial road closure)</i></li> <li>• <i>Removal of mobility parking</i></li> <li>• <i>Bus lane only closed (Petone Esplanade)</i></li> <li>• <i>Roads of Significance (refer attached list, map)</i></li> <li>• <i>Unattended sites required</i></li> </ul> <p>Plans F2.16 and F2.4 must be approved by TMC.</p> <p>Any changes to the approved TMP must be documented on the Onsite Record.</p>						

**APPROVED**

CAR E991183  
Jason Wildman  
STMS Number 307 43

Hutt City Council

Page 4

18 December 2023

**Parking Restrictions:**

Parking restrictions will be installed where required 12-24hrs prior to works commencing. Parking restriction signage is to show actual work times and dates.

**INFORMATION ONLY** :- vehicles may require towing.

Police and Council (570 6666) are to be provided the license plate number of any towed vehicle and to be contacted prior to contacting tow company: 04 570 6666 | 0800 HUTT CITY.Supreme

Towing:0800 129 029.

All related towing fees will be directed to the contractor. Towing authority is not approved as part of the TMP process. HCC including parking enforcement do not approve or take responsibility for any organising and towing of vehicles.

**Kerb Side Collection:**

Kerb side collection occurs Monday to Friday. Refer to the attached kerb side collection schedule. Works to halt when kerb side collection vehicle is working in the area or onsite personnel to assist with the collection.

See <https://www.toogoodtowaste.co.nz/> if unsure of collection day (QR code below)



- A risk assessment is to be applied prior to selecting/installing TMDs.
- Checking-process-for-GTMPs checklist form (attached) is to be completed prior to using the GTMP.

APPROVED

CAR E991183  
Jason Wildman  
STMS Number 307 43

Hutt City Council

18 December 2023

**Inspection activities must be completed as detailed in the approved TMP.**

Type of road	On shoulder or roadside – no time limit	On live lane – up to 5 minutes	Over 5 minutes
<b>Low volume (less than 500vpd) category A or B road environment</b>	Spotter optional – can be one person activity Onsite control must be by either a practising STMS of any category, a practising TMO or an Inspector <i>and in the interim until the warrants are phased out, an STMS of any level or a TC-Inspector.</i>		<b>Inspection not permitted.</b>  <b>Must use a mobile, semi-static, or static closure.</b>
<b>Category A</b>	Spotter optional – can be one person activity	Spotter required – minimum two person activity	
	Onsite control must be by either practising STMS of any category, practising TMO or Inspector <i>(and in the interim until the warrants are phased out):</i>		
	Road level	Onsite control	
	Level 1 road	TC, TC-Inspector or STMS	
	Level 2 road	L2/3 STMS, STMS-NP, or TC-Inspector	
<b>Category B</b>	Spotter optional – can be one person activity	Spotter required – minimum two person activity	
	Onsite control must be by either a practising STMS of any category, a practising TMO or an Inspector <i>and in the interim until the warrants are phased out:</i>		
	Road level	Onsite control	
	Level 1 road	TC, TC-Inspector or STMS	
	Level 2 road (shoulder, roadside or on the lane with speed 60km/h or less)	L2/3 STMS, STMS-NP or TC-Inspector	
	Level 2 road (on the lane with speed 70km/h or more)	L2/3 STMS or STMS-NP	
<b>Category C</b>	Spotter optional – can be one person activity: Onsite control must be by either a practising STMS (C) or an Inspector <i>(and in the interim until the warrants are phased out, a L2/3 STMS, STMS-NP, or TC-Inspector).</i>	<b>Inspection not permitted.</b> <b>Must use a mobile, semi-static, or static closure.</b>	

**APPROVED**  
 CAR E991183  
 Jason Wildman  
 STMS Number 307 43  
  
 18 December 2023




	<p><b>General rules</b> (apply to all the above) Inspectors must move to avoid traffic. They must not expect traffic to move or slow down to avoid them.</p> <p>There must be CSD to the Inspector when on the live lane.</p> <p>On busy roads where traffic volumes and speed affect access to the live lane, peak periods should be avoided or a higher level of TTM considered.</p> <p>Crossing a level LV, 1 or 2 road does not constitute being on a live lane but crossing a level 3 road does, unless a pedestrian crossing facility is being used.</p> <p><b>Vehicle</b> Advance warning in the form of an inspection vehicle fitted with one and preferably two amber flashing beacons and a rear-mounted sign indicating the type of activity taking place must be positioned in advance of the inspection site.</p> <p>A vehicle is not required on a level LV or level 1 road with a permanent speed of less than 65km/h if the Inspector remains on a footpath.</p> <p>On roads with a permanent speed of less than 65km/h an amber flashing beacon is not required on the vehicle if the Inspector or non-invasive works is on an unsealed shoulder (or further away from the carriageway - including a footpath).</p> <p><b>Spotter</b> A spotter is not required for inspections and non-invasive works on level LV roads.</p> <p>Unless otherwise approved by the RCA, all inspections on the live lane of level 1 and level 2 roads require a spotter. The RCA may provide a list of level 1 roads, times and/or activities suitable for inspection by a single inspector (eg where no level LV roads have been declared by the RCA)</p> <p>Where an unaccompanied Inspector is not able to maintain adequate attention (eg due to work tasks or poor visibility), a spotter will be required or another type of traffic management operation used.</p>
Alternative dates if activity delayed	N/A – works will be carried out within the times/dates as listed.

Road aspects affected (*delete either Yes or No to show which aspects are affected*)

Pedestrians affected?	Potentially	Property access affected?	Potentially	Traffic lanes affected?	Potentially
Cyclists affected?	Potentially	Restricted parking affected?	Potentially	Delays or queuing likely?	Potentially

Proposed traffic management methods

**APPROVED**  
 CAR E991183  
 Jason Wildman  
 STMS Number 307 43  
  
 18 December 2023

Installation  
(includes parking of  
plant and materials  
storage)

- STMS to contact Metlink (0800 801 700) for any works including installing a TSL on a bus route or impacting bus stops 30mins prior to installation.
- STMS to contact WTOC (0800 869 286) for any works affecting or close to traffic signals 30 mins prior to installation.

Once on site, the TMP will be implemented as follows:

- Identify public safety and site safety hazards and how they will be addressed and place on the hazard document for 'toolbox' briefing
- STMS to check the TMP is appropriate to the worksite.
- All vehicles are to have correct signage and flashing beacons. They also need to have continuous and appropriate communication with the STMS and each other on an agreed channel at all times
- Work vehicles required on site will be parked within the site or parked legally nearby.
- Mobile Operations or inspection activities may be required to turn on/off water valves.

*Layout Procedure*

Installation of the site will be done under a level 1 mobile closure with appropriate work vehicles and crew.


1. A site drive through will be conducted first to confirm layout, conditions and environment are all appropriate for works to proceed.
2. Vehicle positioning will be as far to the left as practical and the installation vehicle will be stationary at the installation of each sign, with activity occurring only on the non-traffic side of the vehicle.
3. Advanced warning signage will be installed first on the left, followed by progressive signage installation in a 'loop' fashion around the site area.
4. Once ALL signage for the site has been installed delineation and direction signage will be installed in the following order;
  - a. Longitudinal Delineation (Along the lane)
  - b. Tapers (Shifting) & RD6 signage
  - c. Tapers (Merging) & RD6 signage

Once all delineation is installed and prior to personnel, vehicle, plant and machinery populating the worksite, a drive through check must be performed by the STMS to ensure the site has been set up as per the selected TMDs, this should include the checking of worksite layout distances.

APPROVED



CAR E991183  
Jason Wildman  
STMS Number 307 43

Hutt City Council




18 December 2023

<p>Attended (day)</p>	<ul style="list-style-type: none"> <li>• An STMS or delegated TC/TMO must be onsite at all times.</li> <li>• TC/STMS to assist pedestrians/cyclists/driveways and any resident/business driveways.</li> <li>• For Stop/Stop and Stop/Go setups, cyclists will be sent prior to any vehicles.</li> <li>• STMS/TC will complete 2 hourly site checks and document on the onsite record.</li> <li>• Where Mobility Parking are affected alternative to be provided (same side of road, as close as possible), TM personnel to assist and guide users as required</li> </ul> <p>Works near Signals:</p> <ul style="list-style-type: none"> <li>• Any affected signal loops must be notified to WTOC during the pre-installation call to allow them to adjust signal management.</li> </ul> <p>Works near Pedestrian Crossings:</p> <ul style="list-style-type: none"> <li>• <b>TC's</b> to guide pedestrians through/around the closure.</li> </ul> <p>Works near a Bus Stop:</p> <p>Bus stop integrated into MTC Stop Point</p> <ul style="list-style-type: none"> <li>• <b>TC's</b> on stop/go are to stop each bus and assist with loading &amp; unloading of passengers as required.</li> <li>• Bus stop signage is to direct pedestrians towards the stop point</li> </ul> <p>Bus stop relocated away from site</p> <ul style="list-style-type: none"> <li>• Bus stop signage is be placed to show patrons where the relocation is.</li> <li>• TM personnel to assist and guide bus patrons as required</li> <li>• Temporary bus stop signage is to be used</li> <li>• Parking restrictions are to be in place at the relocated bus stop</li> </ul> <p>Works near a School:</p> <p>No work to be completed between school drop off &amp; pick up times: Between 8.30am – 9.30am &amp; 2.30pm – 3.30pm</p>
<p>Attended (night)</p>	<ul style="list-style-type: none"> <li>• An STMS or delegated TC/TMO must be onsite at all times.</li> <li>• TC/STMS to assist pedestrians/cyclists/driveways and any resident/business driveways.</li> <li>• For Stop/Stop and Stop/Go setups, cyclists will be sent prior to any vehicles.</li> <li>• STMS/TC will complete 2 hourly site checks and document on the onsite record.</li> <li>• Additional lighting may be required/supplied.</li> <li>• Noise will be kept to a minimum where possible.</li> <li>• Where Mobility Parking are affected alternative to be provided (same side of road, as close as possible), TM personnel to assist and guide users as required</li> </ul> <p>Works near Signals:</p> <ul style="list-style-type: none"> <li>• Any affected signal loops must be notified to WTOC during the pre-installation call to allow them to adjust signal management.</li> </ul> <p>Works near Pedestrian Crossings:</p> <ul style="list-style-type: none"> <li>• <b>TC's</b> to guide pedestrians through/around the closure.</li> </ul> <p>Works near a Bus Stop:</p> <p>Bus stop integrated into MTC Stop Point</p> <ul style="list-style-type: none"> <li>• <b>TC's</b> on stop/go are to stop each bus and assist with loading &amp; unloading of passengers as required.</li> <li>• Bus stop signage is to direct pedestrians towards the stop point</li> </ul> <p>Bus stop relocated away from site</p> <ul style="list-style-type: none"> <li>• Bus stop signage is be placed to show patrons where the relocation is.</li> <li>• TM personnel to assist and guide bus patrons as required</li> <li>• Temporary bus stop signage is to be used</li> <li>• Parking restrictions are to be in place at the relocated bus stop</li> </ul>
<p>Unattended (day)</p>	<ul style="list-style-type: none"> <li>• An unattended site is not required for non-excavation works.</li> </ul>

  
 CAR E991183  
 Jason Wildman  
 STMS Number 307 43  
 Hutt City Council  
  
 18 December 2023

Unattended (night)	<ul style="list-style-type: none"> <li>An unattended site is not required for non-excavation works.</li> </ul>
Detour route	A detour route is not required or approved in the TMP




**APPROVED**  
 CAR E991183  
 Jason Wildman  
 STMS Number 307.43  
  
 18 December 2023

	<p>Does detour route go into another <b>RCA's</b> roading network? No If Yes, has confirmation of acceptance been requested from that RCA? No <i>Note: Confirmation of acceptance from affected RCA must be submitted prior to occupying the site.</i></p>
Removal	<p>STMS to contact Metlink (0800 801 700) upon site removal STMS to contact WTOC (0800 869 286) upon site removal.</p> <p>Work plant / vehicles to be removed from site before closure is removed</p> <p>Removal of the site will be done under a level 1 mobile closure with appropriate work vehicles and crew.</p> <ol style="list-style-type: none"> <li>1. Workspace delineation to be removed first (by either removing to the kerb for later collection or directly onto a stationary working vehicle)</li> <li>2. Centreline delineation may now be removed using the same method as installation</li> <li>3. Once all delineation is removed – sign removal may commence in a clockwise '<b>loop</b>' fashion (leaving advanced warning signage in place till last)</li> <li>4. A full site check being conducted prior to site departure.</li> </ol> <p>The STMS will carry out the final check before leaving the site.</p>



Proposed TSLs (see TSL decision matrix for guidance)				
	TSL details as required Approval of Temporary Speed Limits (TSL) are in terms of Section 7 of Land Transport Rule: Setting of Speed Limits 2022. (List speed, length and location)	Times (From and to)	Dates (Start and finish)	Diagram ref. no.s (Layout drawings or traffic management diagrams)
Attended day/night	<p>A temporary maximum speed limit is hereby fixed for motor vehicles travelling over the length of _____ situated between _____ (house no./RP) and _____ (house no./RP) on _____ (street or road name)</p> <p>STMS to document on the Onsite Record daily.</p>	<p>7am – 6pm Or 9am – 4pm Or 7pm – 5:30am</p>	<p>01/01/2024 - 31/12/2024</p>	<p>F2.11, F2.12, F2.13, ATMS02, F2.14, ATMS04, F2.22, F2.15, F2.16, F2.17, F2.18, F2.19, F2.20, F2.21, F2.30, F2.31, F2.8, F2.9, ATMS03, J2.19a, J2.20a, J2.20b, J2.20c, J2.20d, J2.20e,</p>
Unattended day/night	<p>A temporary maximum speed limit is hereby fixed for motor vehicles travelling over the length of _____ situated between _____ (house no./RP) and _____ (house no./RP) on _____ (street or road name)</p>	N/A	N/A	N/A
TSL duration	<p>Will the TSL be required for longer than 12 months? If yes, attach the completed checklist from section I-18: Guidance on TMP Monitoring Processes for TSLs to this TMP.</p>			No

Positive traffic management measures

**APPROVED**  
 CAR E991183  
 Jason Wildman  
 STMS Number 307 43  
  
 18 December 2023

- Side friction delineation installed from TSL to the start of the taper.
- Additional cones may be placed on centerlines, edgelines or shoulders to increase site safety and reduce vehicle speed.
- Use of paddles and TSL
- Cone offset delineation – where cones are placed either side of the lane(s), the cones on one side are placed longitudinally offset from the other by half a cone spacing.

Reduced cone spacing (2.5m)  
can be utilised to increase impact

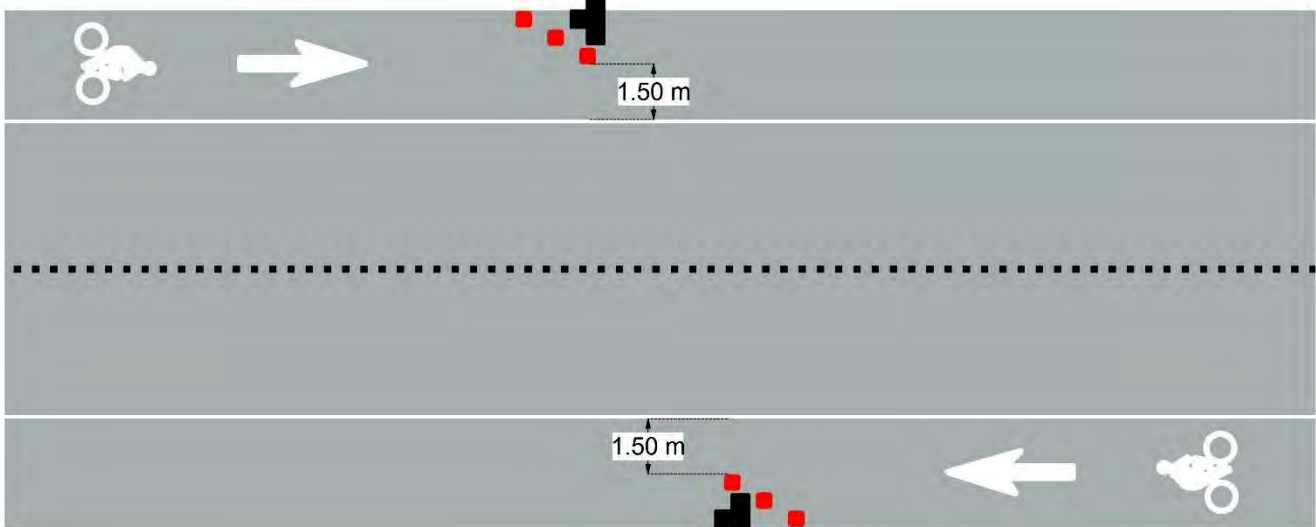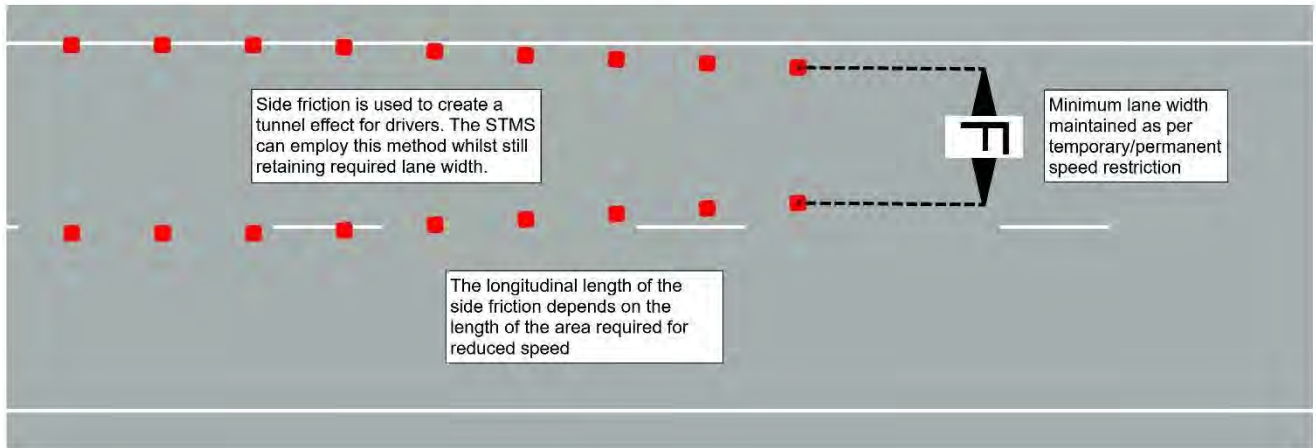

**APPROVED**  
CAR E991183  
Jason Wildman  
STMS Number 307 43  
Hutt City Council  
*Jason Wildman*  
18 December 2023

Contingency plans

<p>Generic contingencies for:</p> <ul style="list-style-type: none"> <li>major incidents</li> <li>incidents</li> <li>pre planned detours.</li> </ul> <p><i>Remove any options which do not apply to your job</i></p>	<p><b>Major Incident</b> A major incident is described as:</p> <ul style="list-style-type: none"> <li>Fatality or notifiable injury - real or potential</li> <li>Significant property damage, or</li> <li>Emergency services (police, fire, etc) require access or control of the site.</li> </ul>	<p><b>Actions</b> The STMS must immediately conduct the following:</p> <ul style="list-style-type: none"> <li>stop all activity and traffic movement</li> <li>secure the site to prevent (further) injury or damage</li> <li>contact the appropriate emergency authorities</li> <li>render first aid if competent and able to do so</li> <li>notify the RCA representative and / or the engineer</li> <li>under the guidance of the officer in charge of the site, reduce effects of TTM on the road or remove the activity if safe to do so</li> <li>re-establish TTM and traffic movements when advised by emergency authorities that it is safe to do so</li> <li>Comply with any obligation to notify WorkSafe.</li> </ul>
	<p><b>Incident</b> An incident is described as:</p> <ul style="list-style-type: none"> <li>excessive delays - real or potential</li> <li>minor or non-inquiry accident that has the potential to affect traffic flow</li> <li>structural failure of the road.</li> </ul>	<p><b>Actions</b> The STMS must immediately conduct the following:</p> <ul style="list-style-type: none"> <li>stop all activity and traffic movement if required</li> <li>secure the site to prevent the prospect of injury or further damage</li> <li>notify the RCA representative and / or the engineer</li> <li>STMS to implement a plan to safely remove TTM and to establish normal traffic flow if safe to do so</li> <li>re-establish TTM and traffic movements when it is safe to do so and when traffic volumes have reduced.</li> </ul>
	<p><b>Detour</b> If because of the on site activity it will not be possible to remove or reduce the effects of TTM once it is established a detour route must be designed. This is likely for:</p> <ul style="list-style-type: none"> <li>excessive delays when using an alternating flow design for TTM</li> <li>redirecting one direction of flow and / or</li> <li>total road closure and redirection of traffic until such time that traffic volumes reduce and tailbacks have been cleared.</li> </ul> <p>The risks in the type of work being undertaken, the risks inherent in the detour, the probable duration of closure and availability and suitability of detour routes need to be considered.</p> <p>The detour and route must be designed including:</p> <ul style="list-style-type: none"> <li>pre approval from the RCA's whose roads will be used or affected by the detour route</li> <li>ensure that TTM equipment for the detour - signs etc are on site and pre installed.</li> </ul>	<p><b>Actions</b> When it is necessary to implement the pre-planned detour the STMS must immediately undertake the following:</p> <ul style="list-style-type: none"> <li>Notify the RCA and / or the engineer when the detour is to be established</li> <li>Drive through the detour in both directions to check that it is stable and safe</li> <li>Remove the detour as soon as it practicable and safe to do so and the traffic volumes have reduced and tailbacks have cleared</li> <li>Notify the RCA and / or the engineer when the detour has been disestablished and normal traffic flows have resumed.</li> </ul>


CAR E991183  
 Jason Wildman  
 STMS Number 307 43  
 Hill City Council  
  
 18 December 2023

	<p>Note also the requirements for no interference at an accident scene:</p> <p>In the event of an accident involving serious harm the STMS must ensure that nothing, including TTM equipment, is removed or disturbed and any wreckage article or thing must not be disturbed or interfered with, except to:</p> <ul style="list-style-type: none"> <li>• save a life of, prevent harm to or relieve the suffering of any person, or</li> <li>• make the site safe or to minimise the risk of a further accident: or</li> <li>• maintain the access of the general public to an essential service or utility, or</li> <li>• prevent serious damage to or serious loss of property, or</li> <li>• follow the direction of a constable acting in his or her duties or act with the permission of an inspector.</li> </ul>
Other contingencies to be identified by the applicant (i.e. steel plates to quickly cover excavations)	<p>This will be determined on a case-by-case basis. Where achievable works will stop until emergency or delays have been cleared.</p> <p>Should signals or e-STOPs fail – Manual Traffic Control is to be installed immediately (refer to F2.14 &amp; F2.22).</p>

Authorisations				
Parking restriction(s) alteration authority	Will controlled street parking be affected?	Yes (potentially)	Has approval been granted?	N/A
	Where Mobility Parking are affected alternative to be provided (same side of road, as close as possible), TM personnel to assist and guide users as required.			
Authorisation to work at permanent traffic signal sites	Will portable traffic signals be used or permanent traffic signals be changed?	Yes (potentially)	Has approval been granted?	No
	WTOC to be notified 30 mins prior to site installation and upon removal.			
Road closure authorisation(s)	Will full carriageway closure continue for more than 5 minutes (or other RCA stipulated time)?	No	Has approval been granted?	No
	N/A			
Bus stop relocation(s) – closure(s)	Will bus stop(s) be obstructed by the activity?	Yes (potentially)	Has approval been granted?	No
	Pre-approval required before works commence. Metlink will be notified 30 mins prior to installation and upon removal.			
Authorisation to use portable traffic signals	Make, model and description/number	<p><b>eSTOP Portable Traffic Signals:</b></p> <p>model#</p> <ul style="list-style-type: none"> <li>• 627 - 1, 627 - 2</li> <li>• 628 - 1, 628 - 2</li> <li>• 629 - 1, 629 - 2</li> <li>• 630 - 1, 630 - 2</li> <li>• 631 - 1, 631 - 2</li> </ul>		
	NZTA compliant?	Yes		

EED			
Is an EED applicable?	EED is not required	EED attached?	EED is not required

Delay calculations/trial plan to determine potential extent of delays

**APPROVED**  
 CAR E991183  
 Jason Wildman  
 STMS Number 307 43  
  
 18 December 2023



**e-STOP & Stop Go Closures:**

Delays of up to 5 minutes can be expected due to the nature of the TTM implemented. The STMS is to take measures to ensure delays remain under 5 minutes at all times, and queues do not extend past the advance warning signage.

If delays are occurring or excessive queueing is apparent, the STMS is to implement one of the following contingency plans;

- 1) Traffic Metering  
Send only a specific amount of vehicles per side instead of clearing the entire queue
- 2) Pause works and open site  
Make the site safe, remove plant and vehicles from the carriageway and open the tapers
- 3) Prioritise high flow route  
Send vehicles from the approach with the highest flow first. Hold side street traffic for slightly longer if required.
- 4) Install additional signage  
Install T2A/T234 “Warning – Hidden Queue” signage up to 2xB from the initial advance warning signage for additional advance warning

STMS will continuously monitor for delays – TMC will be notified of any excessive delays.

**Public notification plan**

A letter drop to residents and businesses is to be completed 5 working days prior to works commencing.

WTOC notification for any works which are in close proximity to traffic signals and/or for a communications plan on permanent VMS within Hutt City region.

Public notification plan attached? No

**On-site monitoring plan**

Attended  
(day and/or night)

An STMS or delegated TC/TMO will be on site at all times.  
2 Hourly Site Checks to be documented on the on-site record.  
STMS/TC to monitor and assist pedestrians, cyclists and driveways when needed.

Unattended  
(day and/or night)

An unattended site is not required for non-excavation works.

**Method for recording daily site TTM activity (eg CoPTTM on-site record)**

- Hazard ID sheet
- CoPTTM on-site record.
- Checking process for Generic TMPs form to be completed prior to set up of a worksite when using this TMP.

**Site safety measures**

- All visitors/contractors to be inducted and hazard ID completed
- PPE gear to be worn by all on site
- Toolbox meeting to be held prior to work commencing.
- Arm bars to be installed around the work area.
- STMS/TC to monitor and assist pedestrians, cyclists and driveway access at all times when required.
- Pedestrian ramps to be installed when required.

Temporary safety barrier system	Will a temporary safety barrier system be used at this worksite?	No	If yes, has the temporary safety barrier system been designed by an installation designer and independently reviewed as being fit for purpose?	N/A
	Statement from temporary safety barrier installation designer attached			N/A

**APPROVED**  
CAR E991183  
Jason Wildman  
STMS Number 307 43

Hutt City Council

18 December 2023

Other information

**LEVEL 1 LAYOUT DISTANCES TABLE**

Permanent speed limit or RCA-designated operating speed (km/h)		≤50	60	70	80	90	100		
<b>Traffic signs</b>									
A	Sign visibility distance (m)	50	60	70	80	90	100		
B	Warning distance (m)	50 or 30*	80	105	120	135	150		
C	Sign spacing (m)	25 or 15*	40	50	60	70	75		
<b>Safety zones</b>									
D	Longitudinal (m)	10 or 5*	15	30	45	55	60		
E	Lateral (m)	1	1	1	1	1	1		
<b>Tapers</b>									
G	Taper length (m) <sup>#</sup>	30	50	70	80	90	100		
K	Distance between tapers (m)	40	50	70	80	90	100		
<b>Delineation devices</b>									
Cone spacing in taper (m)		2.5	2.5	5	5	5	5		
Cone spacing: Working space (m)		5	5	10	10	10	10		
<p>* Larger minimum distances apply on all state highways and also on all multi-lane roads. The smaller minimum distances may be applied on other roads to accommodate road environment constraints.</p> <p># On non-state highways with speeds 50km/h or less, a <b>10m taper</b> (with cones at 1m centres) may be used when there are road environment constraints (eg intersections and commercial accesses).</p> <p>On all roads where shoulder width is less than 2.5m and the activity does not affect the live lane, a <b>10m shoulder taper</b> is permitted (with at least 5 cones at no greater than 2.5m centres).</p> <p>A taper of <b>30m</b> (with cones at 2.5m centres) <b>must</b> be used where manual traffic control (stop/go), portable traffic signals or priority give way are employed.</p>									
<b>Lane widths</b>									
Speed (km/h)	30	40	50	60	70	80	90	100	
F	Lane width (m)	2.75	2.75	3.0	3.0	3.25	3.25	3.5	3.5

Except for delineation device spacings, which are maximum values, the distances specified in the above tables are minimum values.

Attached Diagrams

**APPROVED**

CAR E991183  
Jason Wildman  
STMS Number 307.43

Hutt City Council

*Jason Wildman*  
18 December 2023

Pedestrian Management

1. ATMS05 – Pedestrian Escort (1<sup>st</sup> Choice)
2. F2.1 – Pedestrian Diversion (berm) (2<sup>nd</sup> Choice)
3. F2.2 – Pedestrian Diversion (berm) (3<sup>rd</sup> Choice)
4. F2.3 – Pedestrian Diversion (carriageway) (4<sup>th</sup> Choice)
5. F2.4 – Footpath Closed (5<sup>th</sup> Choice) **Requires TMC approval**

Works on berm/shoulders/Lane Width Reduction

6. CC1 – Works on berm or footpath
7. CC2 – Traffic not crossing road centre
8. CC3 - Works on berm or footpath – vehicle parked on berm
9. CC4 – Footpath diverted onto shoulder or parking lane
10. CC5 – Footpath
11. CC7 – Valve in Shoulder or berm
12. F2.5 – Works on berm
13. F2.6 – Works on parking lane
14. F2.7 – Shoulder Closure
15. F2.11 – Lane Width Reduction
16. F2.12 – Lane Width Reduction (median)

Inspection Activities

17. F4.10 – Inspection Activity
18. ATMS07 – Inspection Activity – Centre of Road

Lane Closures/Diversions/e-STOP/MTC/Traffic Lights/Centre Of Road

19. F2.13 – Two Lane Diversion
20. ATMS02 -2 Way e-STOP
21. F2.14 – 2 Way MTC
22. ATMS04 – e-STOP with MTC
23. F2.22 – 3-4 Way MTC
24. F2.15 – Stop Stop
25. F2.16 – Priority Give Way **Requires TMC approval**
26. F2.17 – Traffic Lights
27. F2.18 – Works in centre of road
28. F2.19 – Intersection
29. F2.20 – Intersection
30. F2.21 – Works in middle of intersection
31. F2.30 – Left Lane Closure (1 way, 2 lane)
32. F2.31 – Right Lane Closure (1 way, 2 lane)

Mobile Operations/Semi Statics

33. CC8 – Valve towards left of lane
34. CC9 – Valve towards right of lane
35. CC10 – Valve in Centre of carriageway
36. CC11 – Valve in Centre of Intersection
37. CC12 – Two way – Two Lane Road
38. F4.1 – Mobile Operation – 5m from edgeline
39. F4.2 – Mobile Operation – within 5m of edgeline
40. F4.3 – Mobile Operation – with pilot
41. F4.4 – Mobile Operation – work vehicle in lane
42. ATMS06 – Semi Static (right or left lane)
43. Mobile Closure – L1 – Install & Removal

**APPROVED**

CAR E991183  
Jason Wildman  
STMS Number 307 43

Hutt City Council

18 December 2023

Cycle Lanes

- 44. F2.8 – Cycle Lane Diversion
- 45. F2.9 – Cycle Lane Diversion
- 46. ATMS03 – Cycle Lane e-STOP


Section J diagrams

- 47. J2.16a
- 48. J2.19a
- 49. J2.20a
- 50. J2.20b
- 51. J2.20c
- 52. J2.20d
- 53. J2.20e

**APPROVED**


CAR E991183  
Jason Wildman  
STMS Number 307.43

Hutt City Council




18 December 2023

Contact details						
	Company / Council	Name	24/7 contact number	CoPTTM ID	Qualification	Expiry date
Principle	Wellington Water	Tim Harty	021 451 104	-	-	-
TMC	Hutt City Council	Jason Wildman	027 330 3097	30743	Cat (ABC) NP	26/10/25
<b>Engineers' representative</b>	Wellington Water	Valitha Roos	021 510 923	-	-	-
Service Delivery Manager	Wellington Water	Steve Watt	021 507 440	-	-	-
	Action Civil	Dave Murtagh	027 442 2971			
Contractor Interim Contacts	Agricontracts Hutt Ltd (CAS)	Jaden Munn	027 319 4575	-	-	-
	Aidan Kelly Contracting (AKC)	Cory Hikuroa	021 455 361	-	-	-
	ATMS	David Quintela	027 213 5654	-	-	-
	Alliance Services Ltd	Chris Barlow	021 640 282	-	-	-
	Anzel Limited	Darryl Tatana	021 281 1102	-	-	-
	Arthur D Riley & Co Ltd	Chris Parkinson	04 472 7614	-	-	-
	Brian Perry Civil	Blair Mould	027 229 3270	-	-	-
	Stantec	AJ Weir (Alice) Andrea Brett Eaton	027 331 9930 021 222 8756 021 861 772	-	-	-
	City Care Ltd	Mark Thompson	027 542 6244	-	-	-
	Constructions Contracts Limited	David Howard	021 243 6656	-	-	-
	Cubic Metre	Andrew McWhirter	021 345 79			
	Daniel Renshaw Drainage Contractor Ltd	Daniel Renshaw	027 450 8799	-	-	-
	Davies Waste Solutions	Jan Godfrey	04 528 9909	-	-	-
	Dawson Waste Services Ltd	Dave Phillipson	022 657 2402	-	-	-
	Detection Services	Ross Beckett	04 915 0530	-	-	-
	DMK Contracting	Deon Kumm	027 202 5142	-	-	-
	Downer New Zealand	Sam Farnworth	021 896 603	-	-	-
	Drain Doctor NZ Ltd	Ian Pauley	027 484 8887	-	-	-
	E Carson & Sons	Eddie Carson	027 442 4343	-	-	-
	E N Ramsbottom Ltd	Michelle Hoffman	027 471 6246	-	-	-
	Fulton Hogan	Duncan Mundell	027 4786 203	-	-	-
	G & C Diggers	Mark Dennes	022 350 7550	-	-	-
	G P Friel Ltd	Dave Phillipson	022 657 2402	-	-	-
	Greenstone Contracting Ltd	David Williams	04 566 0890	-	-	-
	Groundworks Ltd	Hamish Rees	027 765 6139	-	-	-
Horokiwi Paving Limited	Peter Green	027 443 2206	-	-	-	
<b>Hydrotech / TDG Environmental</b>	David Neru	09 600 0888	-	-	-	
Inline Drainage Limited	Patrick Carson	027 294 0952	-	-	-	
Intergroup Ltd	Alex Phelan	021 927 801	-	-	-	

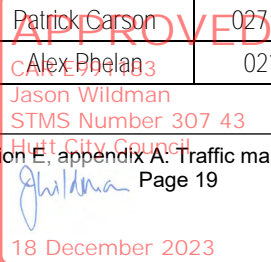  
 Jason Wildman  
 STMS Number 307 43  
 Hutt City Council  
 18 December 2023

	Ives Plumbing Ltd	Daniel Barnett	021 758 621	-	-	-
	JB's Environmental Ltd	John Matangi	021 750 920	-	-	-
	Jet Black Asphalts Ltd	Neville Playford	027 208 9309	-	-	-
	Juno Civil	Jim Juno	021 227 7001	-	-	-
	Laser Plumbing Wellington East	Simon Walker	027 449 1180	-	-	-



**APPROVED**  
 CAR E991183  
 Jason Wildman  
 STMS Number 307 43  
  
 18 December 2023

Contractor Interim Contacts	Mac Engineering	Regan McMurchie	021 1567 908	-	-	-
	Marais Laying NZ Ltd	Adrien Merceron	027 555 7802	-	-	-
	McCormack Group	Willy McCormack	027 449 3985	-	-	-
	McLatchie & Sharp Ltd	Adam Clarke	027 443 3760	-	-	-
	McMaster Civil	Richard McMaster	021 963 509	-	-	-
	Mills Albert Ltd	Dave Mills	021 720 123	-	-	-
	Mottmac	Patrick Wharewera-Jones	027 746 8395	-	-	-
	Mottmac	Matthew Cooper	021 688 013	-	-	-
	Plimmer Plumbing Ltd	Steven Fawcett	027 215 3667	-	-	-
	P & N Siteworks Ltd	James Hosie	027 235 8363	-	-	-
	Pope & Gray Contractors	Sid Taylor	027 255 1948	-	-	-
	Precise Traffic Solutions Ltd	Bux Manuseuga	027 836 5243	-	-	-
	RS Cabling Limited	Nathan Rose	027 275 4317	-	-	-
	Rasmac Contractors Ltd	Lawrence Rasmussen	027 444 3041	-	-	-
	Reline NZ Ltd	Paul Southern	021 175 021	-	-	-
	S & R Asphalts Ltd	Scott Hay	027 440 2405	-	-	-
	S B Maintenance Ltd	David O'Sullivan	027 2810 9998	-	-	-
	SAP Contractors Limited	Glenn Churches	027 272 1666	-	-	-
	Sierra Delta Civil Ltd	Sam Dews	027 592 2290	-	-	-
	Silver Lining Contracting Ltd	Renee Wilkie	021 0828 0647	-	-	-
	Steve Quinn Professional Lawn Mowing Ltd	Steve Quinn	027 451 6343	-	-	-
	Stewart Electrical	Tim Stewart	021 507 245	-	-	-
	Stone Contractors Ltd	Allan Glover	021 529 681	-	-	-
	T E D Drainage Ltd	Karl Taylor-Edwards	027 675 5996	-	-	-
	Tasman Civil	Keith Robertson	027 4384 536	-	-	-
	Tatana Contracting	Darryl Tatana	0800 368 938	-	-	-
	Vac-U-Digga	Kathy Fandham	021 246 3615	-	-	-
	Wal Gordon Plumbing Ltd	Wal Gordon		-	-	-
	Wellington Pipelines Limited	James Fruean	027 499 9223	-	-	-
	Wellington Developments Ltd	Harold Paul	021 0273 7643	-	-	-
	Wet Worx Limited	Walter Alexander	021 239 4211	-	-	-
	A1 Locates	Brad Thomas	021 296 9477	-	-	-
Kelcon Limited	Wayne Kelland	027 263 8731	-	-	-	

**APPROVED**

CAR E991183  
Jason Wildman  
STMS Number 307 43

Hutt City Council

Page 21


18 December 2023

TTM Interim Contacts	ATMS	Vena Lam Sam	021 767 165	39930	Cat A,B,C	22/09/24
	ATMS	Martyn Sauaiga	027 348 9478	72781	Cat A,B (P) Cat C (NP)	19/08/25
	PTS	Bux Manuseuga	027 836 5243	-	-	-
	Hanging Around Traffic Management	Sam Redhill	021 505 900	-	-	-
	Men At Work - Traffic Management	Kurt Puryer-Smith	027 274 2369	-	-	-
	Men At Work - Traffic Management	Todd Lynch	027 282 0998	-	-	-
	SAP Contractors	Glenn Churches	027 272 1666	-	-	-
	Stapp Contracting Traffic Management	Shane Pihema	027 249 9882	-	-	-
	Traffic Management NZ Ltd	Steven Loftus	027 491 9494	-	-	-
	Leading Traffic	Chantelle Mereriana Ngaia	027 2555 5002	-	-	-
	Leading Traffic	Ben Teika	027 555 0997	-	-	-
	Trafficflow	Steven Huriwaka	021 944 037	-	-	-
	Others as required	WTOC		0800 869 286	-	-
Metlink Contact Centre		0800 801 700	-	-	-	
Hutt City Council Corridor Manager		Kara Collins	027 258 3801	-	-	-

**APPROVED**

CAR E991183  
Jason Wildman  
STMS Number 307 43

Hutt City Council



18 December 2023



TMP preparation							
Preparation	Dylan Green	11/12/2023	<i>DGreen</i>	68522	CAT A,B,C(NP)	-	19/08/25

This TMP meets CoPTTM requirements				Number of diagrams attached		53	
TMP returned for correction (if required)							
	Name	Date	Signature	ID no.	Qualification	Expiry date	
Engineer/TMC to complete following section when approval or acceptance required							
Temporary safety barrier system	The attached temporary road safety barrier design has been independently reviewed as being fit for purpose					Not required	
TMP Approved							
	Name	Date	Signature	ID no.	Qualification	Expiry date	
Acceptance by TMC (only required if TMP approved by engineer)							
	Name	Date	Signature	ID no.	Qualification	Expiry date	

Qualifier for engineer or TMC approval

Approval of this TMP authorises the use of any regulatory signs included in the TMP or attached traffic management diagrams.

This TMP is approved on the following basis:

- To the best of the approving **engineer's/TMC's** judgment this TMP conforms to the requirements of CoPTTM.
- This plan is approved on the basis that the activity, the location and the road environment have been correctly represented by the applicant. Any inaccuracy in the portrayal of this information is the responsibility of the applicant.
- The TMP provides so far as is reasonably practicable, a safe and fit for purpose TTM system.
- The STMS for the activity is reminded that it is the STMS's duty to postpone, cancel or modify operations due to the adverse traffic, weather or other conditions that affect the safety of this site.**

Notification to TMC prior to occupying worksite/Notification completed			
Type of notification to TMC required		Notification completed	Date
			Time

**APPROVED**  
 CAR E991183  
 Jason Wildman  
 STMS Number 307 43  
  
 18 December 2023

# ROAD SPACE BOOKING

<b>Address:</b>			
<b>Contractor:</b>			
<b>Dates &amp; Times (attended):</b>	<b>From:</b>		<b>To:</b>
<b>Dates &amp; Times (unattended):</b>	<b>From:</b>		<b>To:</b>
<b>Generic TMP used:</b>			
<b>Diagram (s) used:</b>			
<b>CAR #</b>			
<b>Work Activity and Reasons TTM to remain in place:</b>			
<b>Contractor Name:</b>			
<b>Contractors Signature:</b>			
<b>TMC Approval:</b>			


Please attach photos of site active site set up (these photos are to include both ends of the site (inclusive of any side roads), pedestrian/cycle management and the working area.



**APPROVED**  
 CAR E991183  
 Jason Wildman  
 STMS Number 307 43  
 Hutt City Council  
  
 18 December 2023

**TEMPORARY SPEED LIMIT (TSL)  
DECISION MATRIX  
WORKSHEET**

**INSTRUCTIONS**  
Select the appropriate road condition description for each of the four factors, and in the right hand circle list the chosen TSL for that road condition. Transfer lowest TSL to the bottom circle.



	EXCELLENT	AVERAGE	BELOW AVERAGE	POOR	
<b>1. Minimum Lane Width</b>	3.5m	3.25m	3.00m	2.75m	
<b>2. Pavement / Surface Condition</b>	The shoulder and lane is clear of loose or greasy material and the traveled way is smooth	The road is close to normal condition except for a few minor defects (eg small pot holes or a few pieces of loose aggregate) <b>70km/h</b> where new seal has been swept but not marked	Defects and / or loose material on the lane (eg unattended reseals) <b>50km/h</b> for protection of a new seal	There are major defects and / or significant loose material on the lane (eg recently milled surface , large stones, steel plates)	
<b>3. Visibility and Alignment</b>	There is greater than 140m visibility to the first cone in taper, <b>and</b> the worksite has not imposed a change in alignment	There is less than 140m visibility to the first cone in taper, <b>or</b> vehicles are deflected by 20 degrees or less from the original direction of travel 	There is less than 60m visibility to the first cone in taper, <b>or</b> vehicles are deflected by 20-45 degrees from the original direction of travel 	There is less than 30m visibility to the first cone in taper, <b>or</b> vehicles are deflected by more than 45 degrees from the original direction of travel 	
<b>4. Site Clutter</b>	Low site clutter, clear vehicle lanes, cycle lanes and footpaths	Some site clutter either plant or materials, vehicle lanes, cycle lanes and footpaths are lightly trafficked	Considerable site clutter requires additional management to guide vehicles though the site. Some queues of road users	Has numerous driver distractions including construction traffic. Cycle lanes or footpaths are closed. <b>30km/h</b> for portable traffic signals, MTC operations or where traffic has to traverse the actual active working space (either in a delineated single lane or where traffic is not separated from the working space)	

**Is the lowest speed 80km/h or less and at least 10km/h below the permanent speed?**

Yes  Use this Temporary Speed Limit

No  No Temporary Speed Limit Required

**APPROVED**  
CAR 5981183  
John Dickson  
STMS Number 307 43  
Council  
18 December 2022



[Click here to reset](#)

TMP or generic plan reference

ON-SITE RECORD MOBILE OPERATIONS (*On-site record must be completed and retained with the applied TMP for 12 months*) Today's date

STMS in charge of TTM


Name	NZTA warrant	TTM ID Number	NZTA warrant expiry date	STMS signature	Time

In charge STMS pre-start check

Mandatory Items to be checked as fit for purpose	High-visibility garments are fit for purpose, in an acceptable condition and worn correctly?	Vehicle Xenon (or LED)/Beacons are fit for purpose?	LAS/RD6/AWVMS/VMS/Horizontal arrow boards are fit for purpose?	TMA's are fit for purpose	Two-way radios available, operating OK and batteries are fully charged	Correct signs for work operation are fitted to all vehicles and are fit for purpose
Time the check was completed:		In charge STMS signature:				

Operation record (*To be completed for all inspection worksites/runs, mobile runs, semi-static sites*)

Affected Road Environment Details			Work Activity Timing	
Affected Road name(s)	Worksite start point	Worksite end point	Start	End

**APPROVED**  
 CAR E991183  
 Jason Wildman  
 STMS Number 307 43  
 Hutt City Council  
  
 18 December 2023


**Checks (must be completed and documented at least every 30 minutes)**

**Mobile closure**

Time	Distances between vehicles maintained	Lateral positioning of vehicles maintained	LAS/RD6/AWVMS/VMS/Horizontal arrowboards continue to operate correctly	Road clear and available for planned work?	Static equipment maintained?	Safety zones maintained?	Working space adequate and maintained?

**Comments relating to any changes and or improvements to the approved TTM/TMP**

Time of comment	Detail

**APPROVED**  
 CAR E991183  
 Jason Wildman  
 STMS Number 307 43  
 Hutt City Council  
  
 18 December 2023

**ON-SITE RECORD**  
On-site record must be retained with TMP for 12 months.

Today's date

Location details	Road names(s):	House number/RPs:	Suburb:
------------------	----------------	-------------------	---------

**Working space**

Person responsible for working space	Name	Signature
<i>Where the STMS/TC is responsible for both the working space and TTM they sign above and in the appropriate TTM box below</i>		

**TTM**

STMS in charge of TTM	Name	TTM ID Number	Warrant expiry date	Signature	Time
Worksite handover accepted by replacement STMS	Name	ID Number	Warrant expiry date	Signature	Time
	Tick to confirm handover briefing completed				

**Delegation**

Worksite control accepted by TC/STMS-NP	Name	ID Number	Warrant expiry date	Signature	Time
	Tick to confirm briefing completed				

**Temporary speed limit**

Street/road name (RPs or street numbers):	TSL action	Date:	Time:	TSL speed:	Length of TSL (m):
From:                                  To:	TSL installed				
	TSL remains in place				
	TSL removed				
Street/road name (RPs or street numbers):	TSL action	Date:	Time:	TSL speed:	Length of TSL (m):
From:                                  To:	TSL installed				
	TSL remains in place				
	TSL removed				
Street/road name (RPs or street numbers):	TSL action	Date:	Time:	TSL speed:	Length of TSL (m):
From:                                  To:	TSL installed				
	TSL remains in place				
	TSL removed				
Street/road name (RPs or street numbers):	TSL action	Date:	Time:	TSL speed:	Length of TSL (m):
From:                                  To:	TSL installed				
	TSL remains in place				
	TSL removed				

**APPROVED**  
 CAR E991183  
 Jason Wildman  
 STMS Number 307 43  
 Hutt City Council  
 18 December 2023


Worksite monitoring

TTM to be monitored and 2 hourly inspections documented below.

Items to be inspected	TTM set-up	2 hourly check	2 hourly check	2 hourly check	2 hourly check	2 hourly check	TTM removal
High-visibility garment worn by all?							
Signs positioned as per TMP?							
Conflicting signs covered?							
Correct delineation as per TMP?							
Lane widths appropriate?							
Appropriate positive TTM used?							
Footpath standards met?							
Cycle lane standards met?							
Traffic flows OK?							
Adequate property access?							
Barrier deflection area is clear? <i>(Refer to Barrier design statement)</i>							
<i>Add others as required</i>							
Time inspection completed:							
Signature:							

Comments:

Time	Adjustment made and reason for change

**APPROVED**  
 CAR E991183  
 Jason Wildman  
 STMS Number 307 43  
 Hutt City Council  
  
 18 December 2023

## Checking process for generic TMPs

*This form, or a similar company record, must be completed prior to set up of a worksite where a generic TMP is used.*

### Location details

Road name(s)		House number/RP(s)		Suburb
Road name(s)		House number/RP(s)		
Generic TMP reference no.		TMD no(s).		<i>Note: The checking process must include all the TMDs to be used</i>

Category	Points to consider	Y	N	Comment/Mitigation
Road level	Is this at the correct road level?			
Shape	Are the following catered for in the generic TMP? <ul style="list-style-type: none"> <li>• Intersections</li> <li>• Vertical Curves (hills)</li> <li>• Horizontal Curves (corners)</li> <li>• Sufficient advance warning</li> </ul>			
Direction and protection	Check that there is: <ul style="list-style-type: none"> <li>• sufficient length to place the planned direction and protection</li> <li>• sufficient road width to place the planned direction and protection ie minimum lane width is 2.75m</li> <li>• adequate sight distance on both sides</li> <li>• sufficient room to accommodate required positive traffic control</li> </ul>			
Proposed speed restrictions	Is a TSL required? Refer to the TSL decision matrix in CoPTTM (section E Appendix B)			
Plant and equipment	Will your plant and equipment fit within the designated working space?			
Personal safety	Are all workers able to carry out their work within the designated working space? If not are they covered by the rules for inspections?			
Layout diagrams	Is diagram(s) detailed in the generic TMP? Does the diagram(s) match the written section of the TMP?			
RCA notification	Has the RCA been notified?			

### Completed by:

STMS/TC in charge of worksite  (All names to be entered before site set-up)	Name	Signature	Date	Qualification	ID number
	Name	Signature	Date	Qualification	ID number

**APPROVED**

CAR E291183  
 Jason Wilder  
 STMS Number 307 43  
 Hutt City Council

*Wildman*




## Roads of Significance

TMPs on the following roads cannot be self-approved. Approval from the HCCTMC is required.

1. Wainuiomata Hill Road (both directions) from Rishworth Street to Parkway
2. Wainui Road from Rishworth Street to Whites Line East
3. Whites Line East from Wainui Road to Randwick Road
4. Randwick Road
5. Waione Street including Seaview Roundabout
6. The Esplanade (both directions) including Hutt Road roundabout
7. State Highway 2 onramp (Petone)
8. Jackson Street from Hutt Road to Cuba Street
9. Cuba Street
10. Hutt Road
11. Railway Avenue
12. Ewen Bridge from Railway Avenue to Queens Drive including roundabout
13. Woburn Road
14. Ludlam Cres
15. Whites Line East from Randwick Road (including roundabout) to Wainui Road
16. Lower Hutt CBD
17. Melling Bridge
18. Block Road
19. High Street from Queens Drive roundabout to Fairway Drive roundabout
20. Fairway Drive from High Street to Kennedy Good Bridge
21. Kennedy Good Bridge to State Highway 2
22. Eastern Hutt Road from High Street to Stokes Valley Road both directions (including both roundabouts)
23. Eastern Hutt Road from Stokes Valley Road to Reynolds Bach Drive



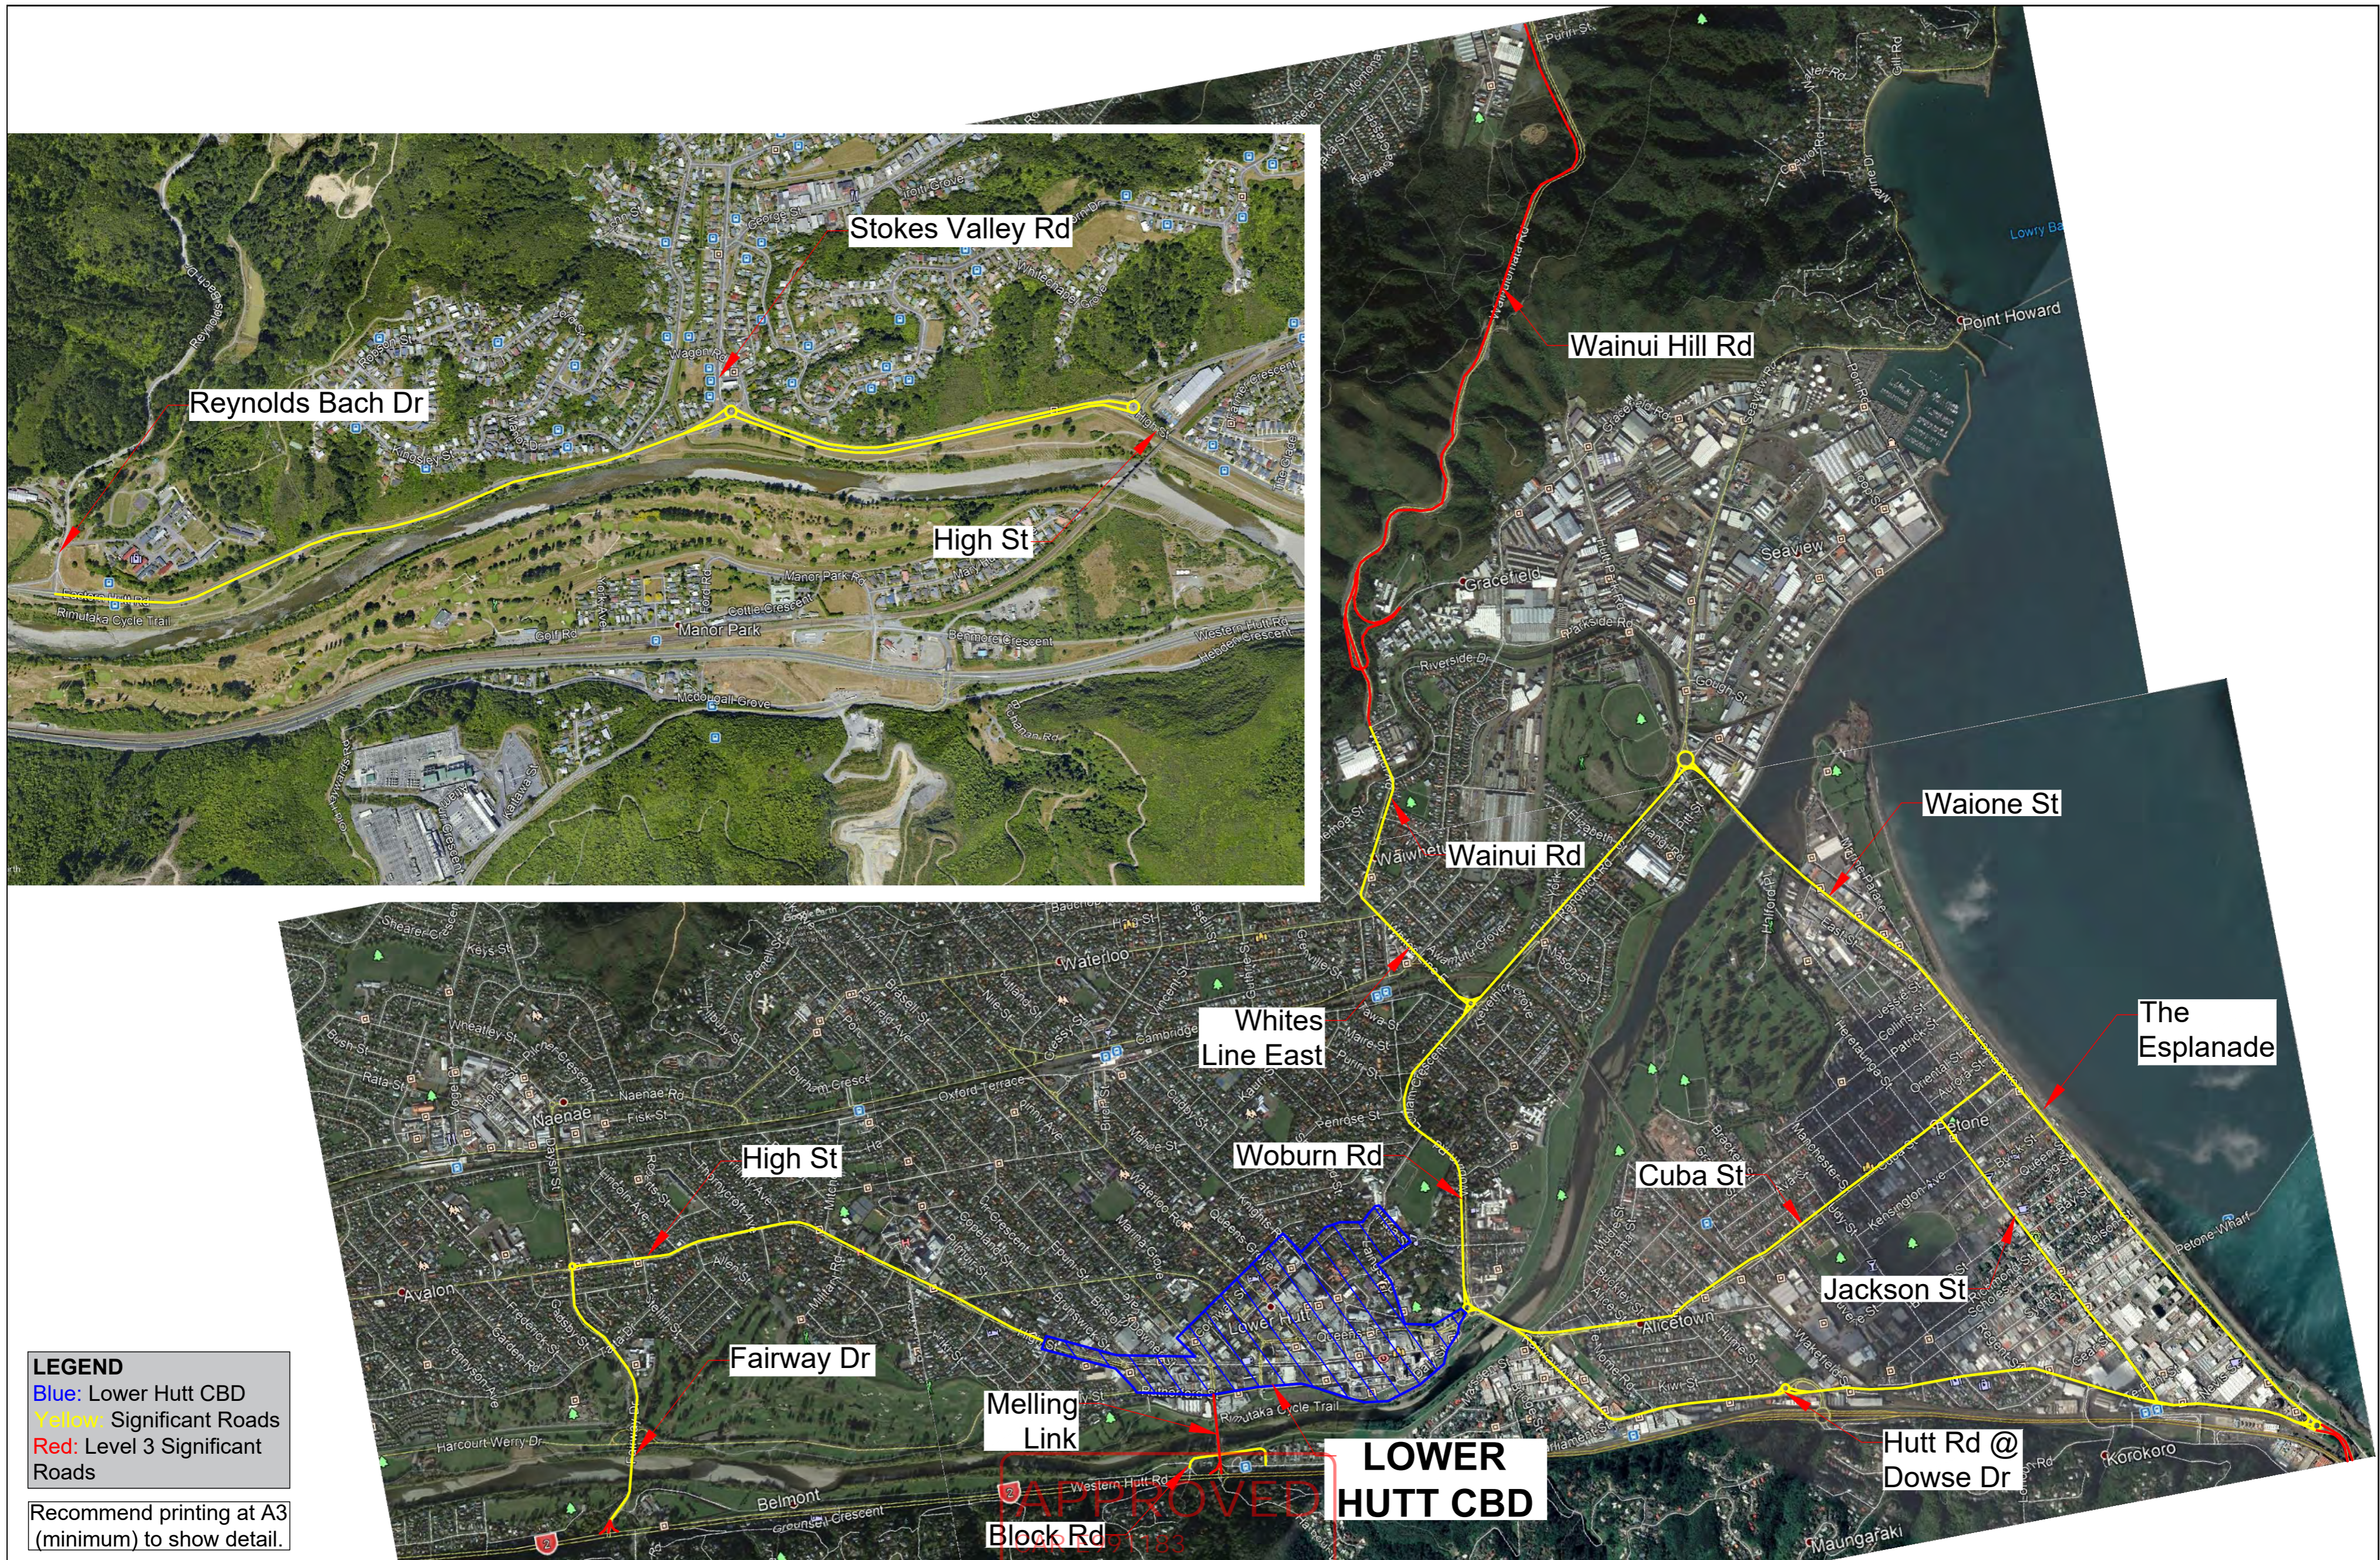

**LEGEND**  
 Blue: Lower Hutt CBD  
 Yellow: Significant Roads  
 Red: Level 3 Significant Roads

Recommend printing at A3 (minimum) to show detail.

4					
3					
2					
1	Reference Purposes Only	D Wood			25/1/19
No	Revision:	Drawn	Job Manager	Project Direction	Date



Although the information displayed has been prepared with care and in good faith, this map is designed to be illustrative only. The council cannot guarantee the accuracy or completeness of the information and accepts no liability for any loss suffered as a result of reliance on it. Property boundary/Asset display may not be survey accurate, and can only be verified by a registered surveyor.  
 This map is drawn on the New Zealand Transverse Mercator projection, using New Zealand Geodetic Datum 2000  
 Cadastral information sourced from Land Information New Zealand: Crown Copyright Reserved.  
 Aerial photography flown over Jan-Mar 2008/10. Copyright 2008/10 Hutt City Council and New Zealand Aerial Mapping Limited.

18 December 2023

Drawn: D Wood	Designer: D Wood
Drafting Check	Design Check
Approved (Project Director)	D Simmons
Date	
Scale: (Not to Scale)	

Project: Hutt City Roads of Significance.  
 (Roads which require TMC approval)  
 Original Size  
 A3

Methodology:  
**PEDESTRIAN PROVISION**


**ROAD LEVEL:  
ALL**

Detail:  
FOOTPATH CLOSED - PEDESTRIANS ESCORTED


**SPEED LIMIT:  
ALL**

Restrictions:

# ATMS05



STMS to consider if additional safety measures are appropriate to protect hazards / guide pedestrians past the site e.g. safety fencing / cone bars. This is particularly important around excavations. In some instances requirements may change between attended and unattended sites.

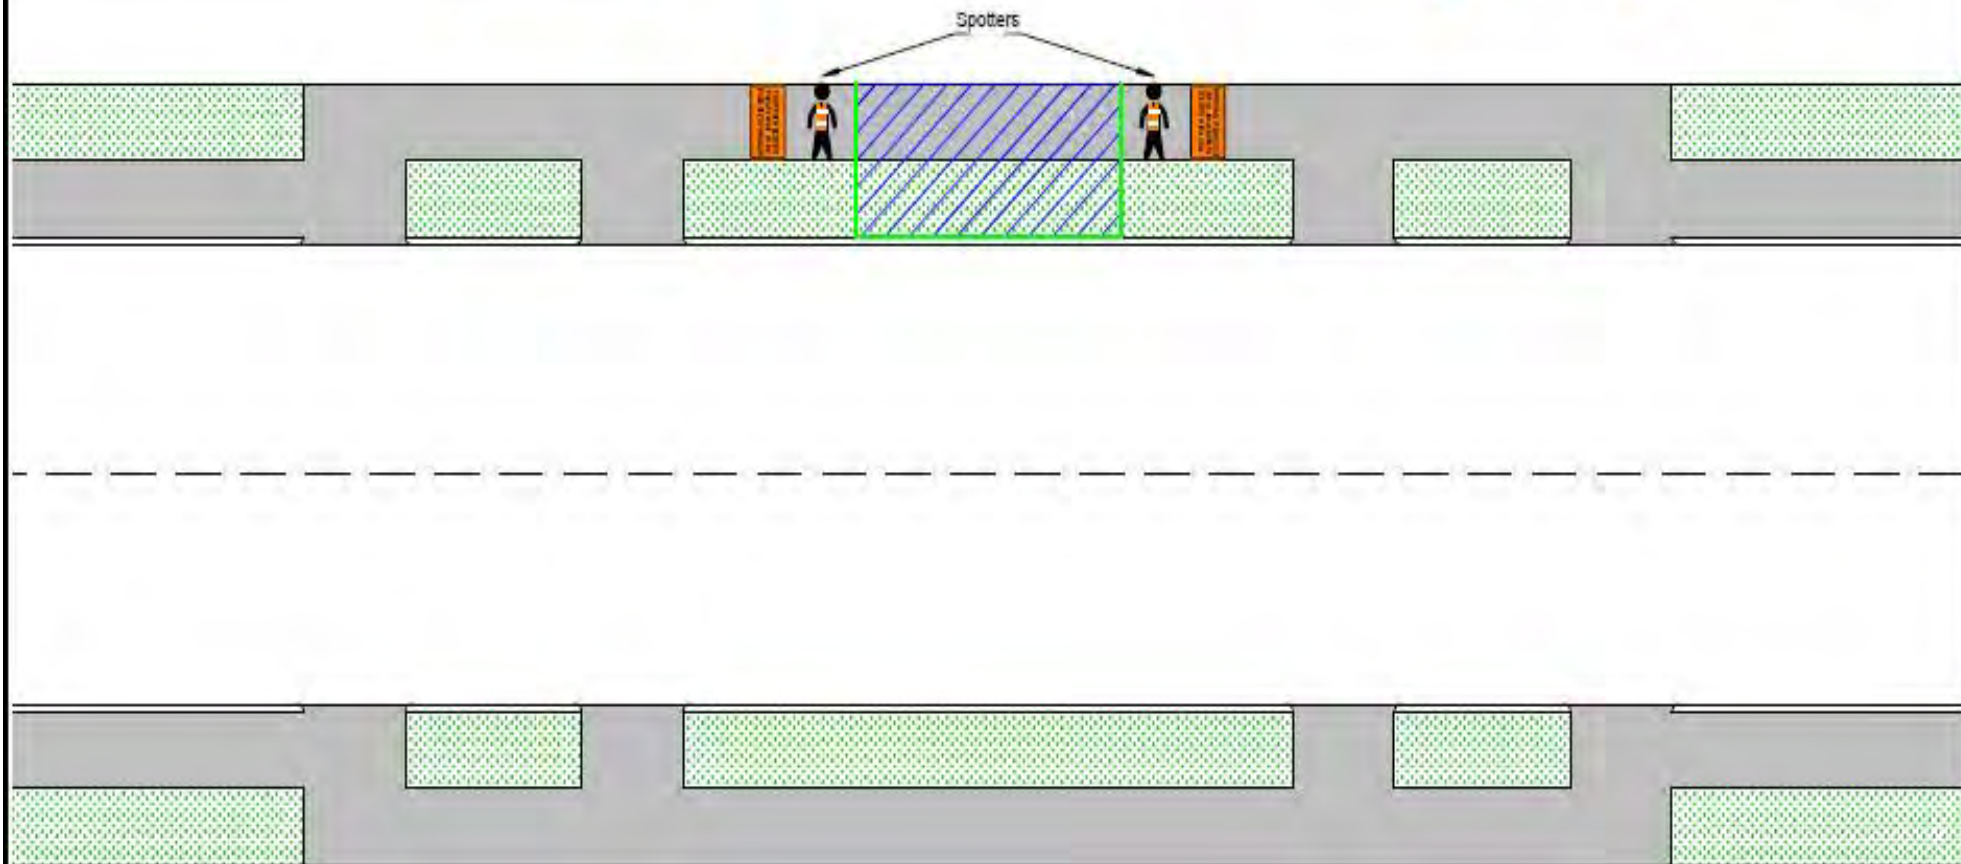

**Notes:**

- One spotter can be used over short distances where they can suitably control pedestrians through the working space i.e. 20m.
- This plan can ONLY be used during attended times.


**APPROVED**

CAR E991183  
Jason Wildman  
STMS Number 307 43  
Hutt City Council

18 December 2023

**FOOTPATH CLOSED  
PLEASE WAIT TO BE  
ESCORTED THROUGH**

# 1. CC1 Work on berm or footpath - light vehicle parked in carriageway

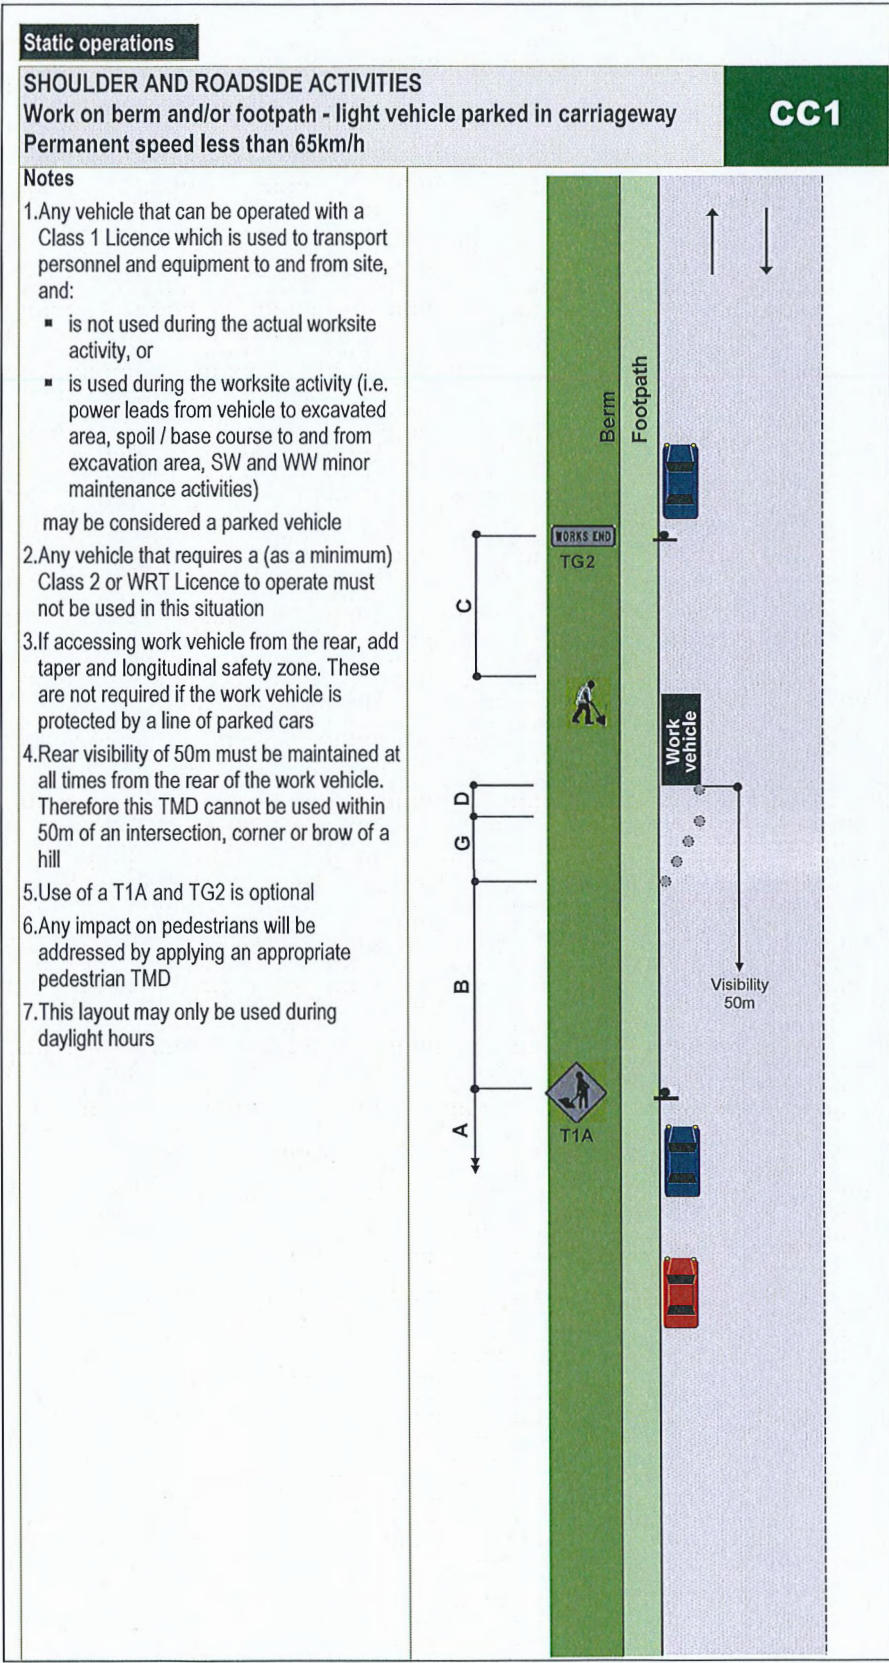

APPROVED

CAR E991183  
 Jason Wildman  
 STIMS Number 307 43  
 Hutt City Council

18 December 2023

## 2. CC2 Traffic not crossing road centre - heavy vehicle parked in carriageway

Static operations	
<p><b>TWO-WAY TWO-LANE ROAD</b>                      Traffic not crossing road centre - heavy vehicle parked in carriageway                      Permanent speed less than 65km/h</p>	
<b>CC2</b>	
<p><b>Notes</b></p> <ol style="list-style-type: none"> <li>1. A heavy vehicle is defined as any vehicle that requires (as a minimum) a Class 2 or WRT Licence to operate</li> <li>2. To prevent traffic having to otherwise cross the centre line (and to maintain F), the 1m lateral safety zone and cones along the side of the work vehicle are not required</li> <li>3. If work vehicle can be parked (or partially parked) on the berm, then this is the preferred option</li> <li>4. Driver is to exit and enter the vehicle when the way is clear</li> <li>5. Taper not required if traffic side of work vehicle is inside a line of parked cars (i.e. work vehicle is protected by the line of parked cars)</li> <li>6. If traffic is required to cross the centreline then either TMD F2.13, F2.14, F2.16 or F2.17 will be used</li> </ol>	

**APPROVED**  
 CAR E991183  
 Jason Wildman  
 STIMS Number 307 43  
 Hutt City Council  
  
 18 December 2023


## CC3 Work on berm and/or footpath - work vehicle parked on berm

Static operations	
<b>SHOULDER AND ROADSIDE ACTIVITIES</b> Work on berm and/or footpath - work vehicle parked on berm Permanent speed less than 65km/h	
<b>CC3</b>	
<p><b>Notes</b></p> <ol style="list-style-type: none"> <li>Where contraflow or alternating flow is required if the work vehicle is parked in the carriageway, then the vehicle may instead be parked outside of the carriageway on the front or back berm if the ground surface is firm (not muddy)</li> <li>The vehicle will be parked so that it does not obstruct the normal or safe entry to, or exit from, or movement of other vehicles, or pedestrians within the road reserve</li> <li>Use of a T1A and TG2 is optional</li> <li>Any pedestrian management required will be completed as per TMD F2.1, F2.2, F2.3, CC4 or CC5</li> <li>A safety fence is required around any excavations, falling hazards (e.g. open manhole) or mechanical equipment.</li> <li>Any berm areas affected by the parking of the work vehicle will be reinstated by Wellington Water / City Care with topsoil and grass to the same level as the adjoining berm</li> </ol>	

APPROVED

CAR E991183  
 Jason Wildman  
 STIMS Number 307 43  
 Hutt City Council  
  
 18 December 2023

### 3. CC4 Footpath diverted onto shoulder or parking lane

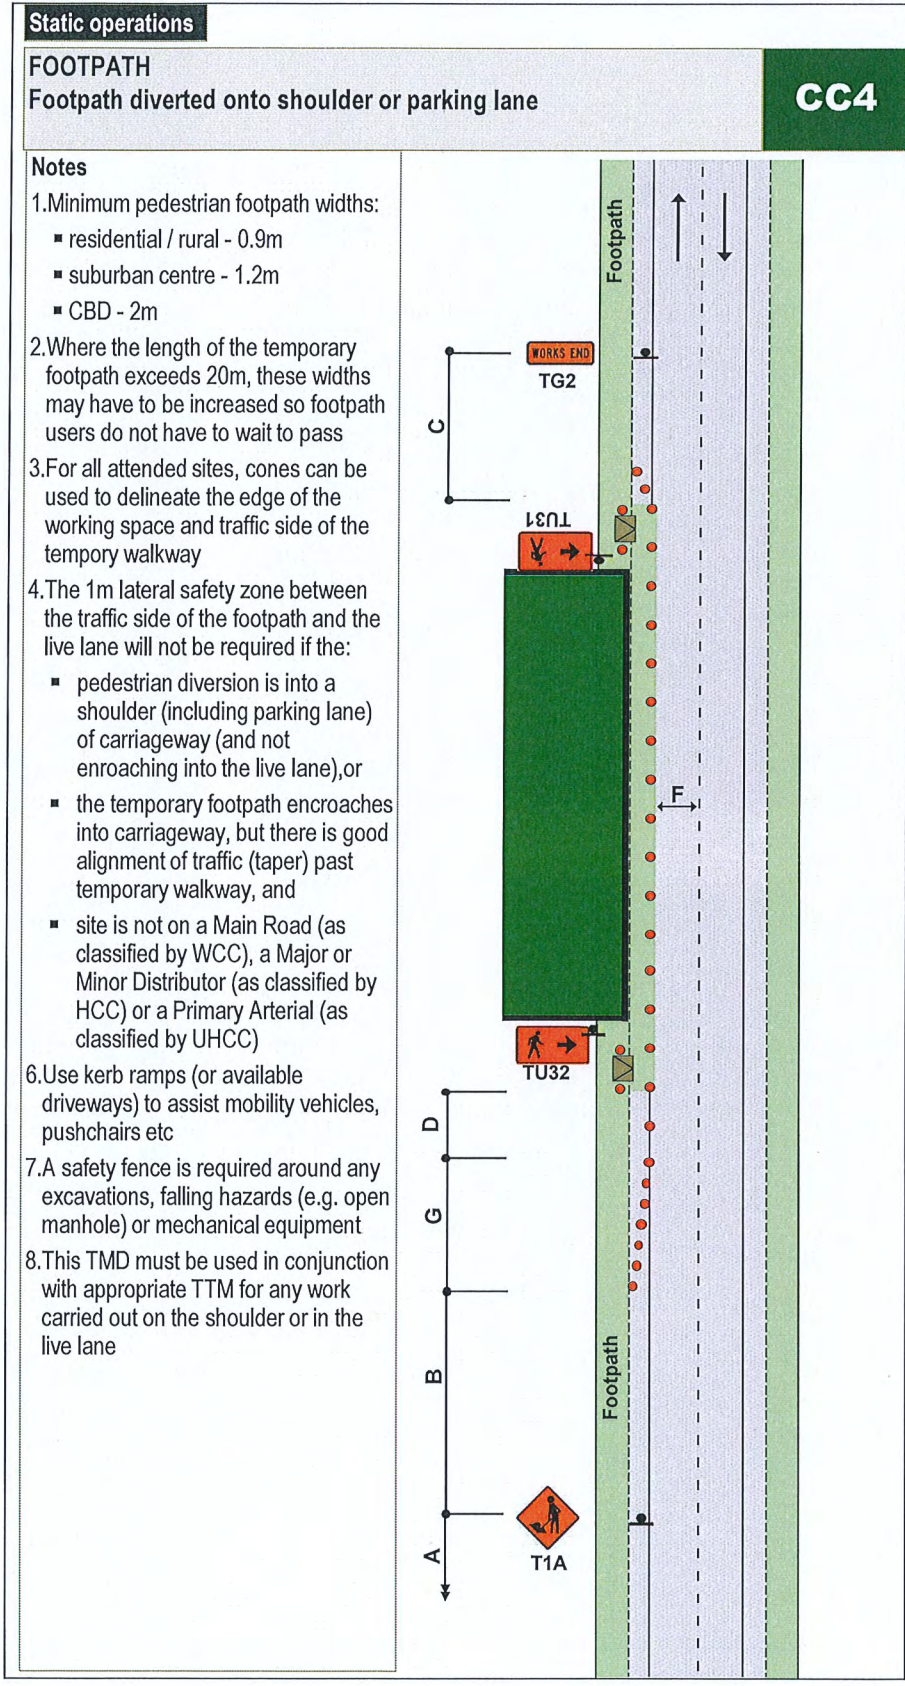

TMC comment - refer to F2.3 for minimum requirements ie 1m lateral safety zone and separation of this from pedestrians with cone bars

APPROVED

CAR E991183  
Jason Wildman  
STMS Number 307 43  
Hutt City Council

18 December 2023

## CC5 Footpath controller guiding pedestrians past the working space

Static operations	
<b>FOOTPATH</b>	CC5
Footpath controller used to guide pedestrians safely past the working space Not to be used on a Main Road as classified by WCC	
<ol style="list-style-type: none"> <li>1. To be used where foot traffic is low (no more than 15 people per hour - 1 person every 4 minutes)</li> <li>2. No footpath directional signs required</li> <li>3. Footpath controller must stop work and guide pedestrians past the working space (providing assistance as required)</li> <li>4. Depending on the volume of foot traffic, an extra person may be required to act as Footpath controller</li> <li>5. For all attended sites, cones can be used to delineate the edge of the working space and traffic side of the temporary walkway</li> <li>6. The 1m lateral safety zone between the traffic side of the footpath and the live lane will not be required if the:                             <ul style="list-style-type: none"> <li>▪ pedestrian diversion is into a shoulder (including parking lane) of carriageway (and not encroaching into the live lane), or</li> <li>▪ the temporary footpath encroaches into carriageway, but there is good alignment of traffic (taper) past temporary walkway, and</li> <li>▪ is not on a Main Road (as classified by WCC), a Major or Minor Distributor (as classified by HCC) or a Primary Arterial (as classified by UHCC)</li> </ul> </li> <li>6. Use kerb ramps (or available driveways) to assist mobility vehicles, pushchairs etc</li> <li>7. A safety fence is required around any excavations, falling hazards (e.g. open manhole) or mechanical equipment</li> <li>8. This TMD may be used in conjunction with other forms of pedestrian management</li> <li>9. This TMD must be used in conjunction with appropriate TTM for any work carried out on the shoulder or in the live lane</li> </ol>	

APPROVED

CAR E991183  
 Jason Wildman  
 STIMS Number 307 43  
 Hutt City Council

18 December 2023




FOOTPATH

Footpath diverted onto berm behind working space  
First preference

F2.1  
Level 1

Notes

1. Minimum pedestrian footpath widths:
  - Residential/Rural/Suburban Centre - 1.2m
  - CBD - 2m
2. Where the length of the temporary footpath exceeds 20m, these widths may have to be increased so footpath users do not have to wait to pass
3. Temporary footpath surfaces must be suitable for footpath users
4. Use safety fence to enclose the working space, or at attended worksites, cones connected with cone bars can be used to enclose the working space but only for a short period of time  
Note: Cone bars are not recommended where heavy equipment (eg a digger) is being used. A safety fence is preferred in these cases
5. This TMD must be used in conjunction with appropriate TTM for any work carried out on the shoulder or in the live lane

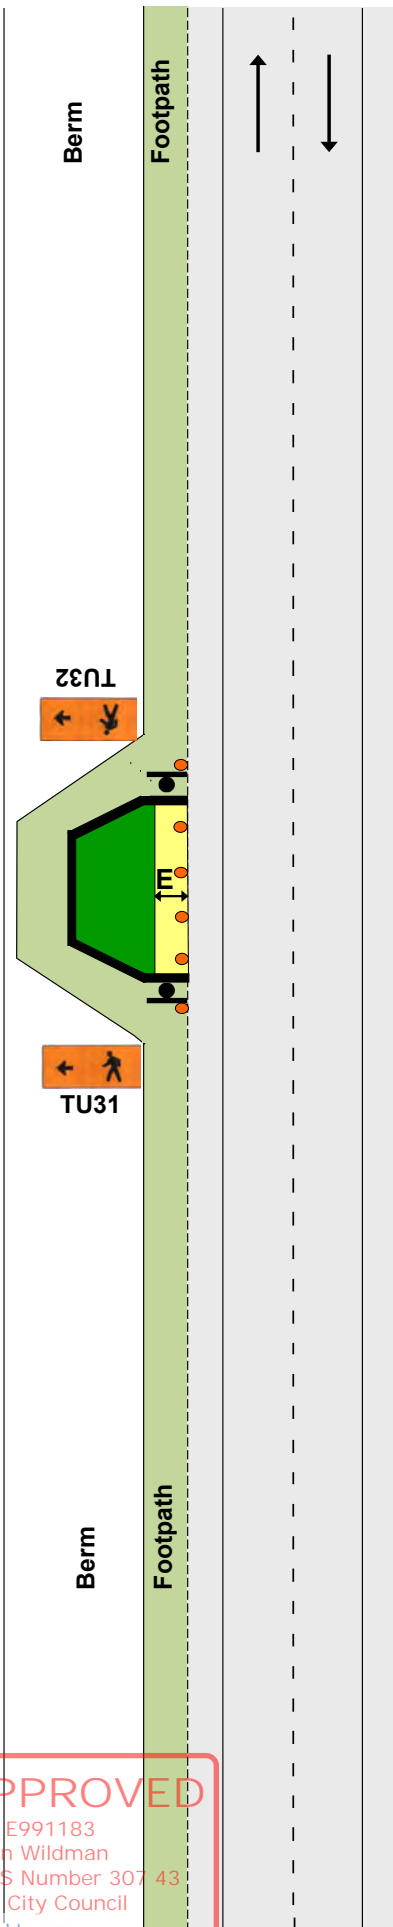


**APPROVED**  
 CAR E991183  
 Jason Wildman  
 STMS Number 307 43  
 Hutt City Council  
*Wildman*  
 18 December 2022

FOOTPATH

Footpath diverted onto berm between working space and carriageway  
 Second preference

Notes

1. Minimum pedestrian footpath widths:
  - Residential/Rural/Suburban Centre - 1.2m
  - CBD - 2m
2. Where the length of the temporary footpath exceeds 20m, these widths may have to be increased so footpath users do not have to wait to pass
3. Temporary footpath surfaces must be suitable for footpath users
4. Use safety fence to enclose the working space, or at attended worksites, cones connected with cone bars can be used to enclose the working space but only for a short period of time  
 Note: Cone bars are not recommended where heavy equipment (eg a digger) is being used. A safety fence is preferred in these cases
5. Use barrier or safety fence to delineate the traffic side of the footpath, or at attended worksites cones connected with cone bars can be used to delineate the traffic side of the footpath for a short period of time (not for use on state highways)
6. There must be a lateral safety zone between the traffic side of the footpath and the live lane:
  - 0.5m for barrier
  - 1m for safety fence or cone bars
7. This TMD must be used in conjunction with appropriate TTM for any work carried out on the shoulder or in the live lane

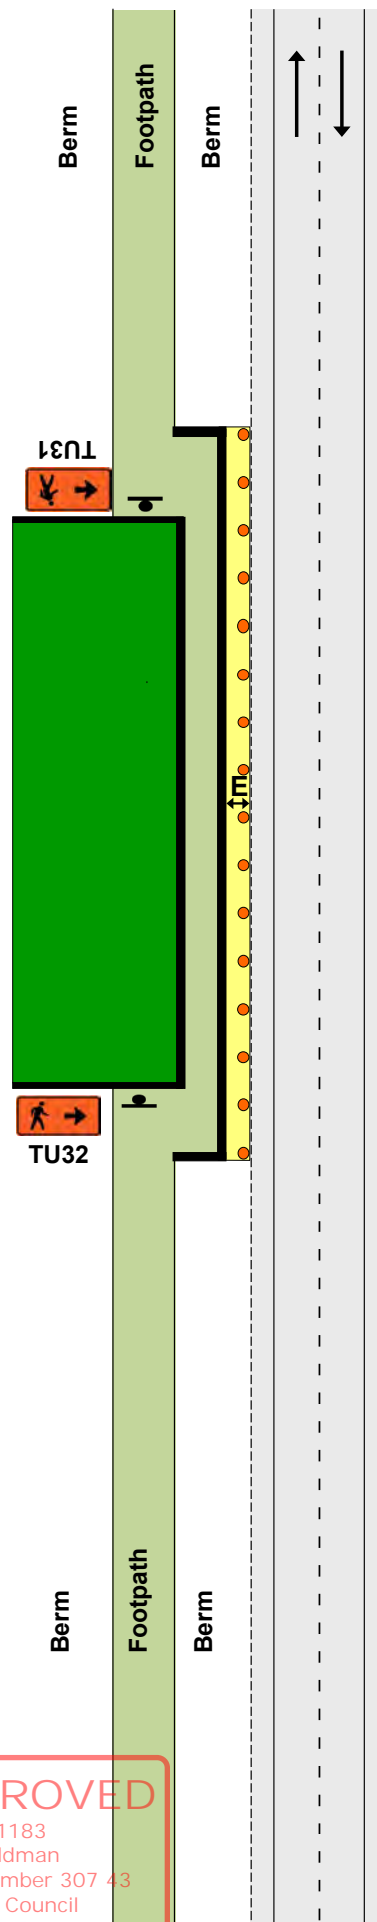


**APPROVED**  
 CAR E991183  
 Jason Wildman  
 STMS Number 307 43  
 Hutt City Council  
*Wildman*  
 18 December 2022

FOOTPATH  
Footpath diverted onto carriageway  
Third preference

Notes

1. Minimum pedestrian footpath widths:
  - Residential/Rural/Suburban Centre - 1.2m
  - CBD - 2m
2. Where the length of the temporary footpath exceeds 20m, these widths may have to be increased so footpath users do not have to wait to pass
3. Use safety fence to enclose the working space, or at attended worksites, cones connected with cone bars can be used to enclose the working space but only for a short period of time  
Note: Cone bars are not recommended where heavy equipment (eg a digger) is being used. A safety fence is preferred in these cases
4. Use barrier or safety fence to delineate the traffic side of the footpath, or at attended worksites cones connected with cone bars can be used to delineate the traffic side of the footpath for a short period of time (not for use on state highways)
5. There must be a lateral safety zone between the traffic side of the footpath and the live lane:
  - 0.5m for barrier
  - 1m for safety fence or cone bars
6. Use kerb ramps to assist mobility vehicles, pushchairs, etc
7. At night-time, corners of safety fence may be illuminated with flashing amber warning lights
8. This TMD must be used in conjunction with appropriate TTM for any work carried out on the shoulder or in the live lane

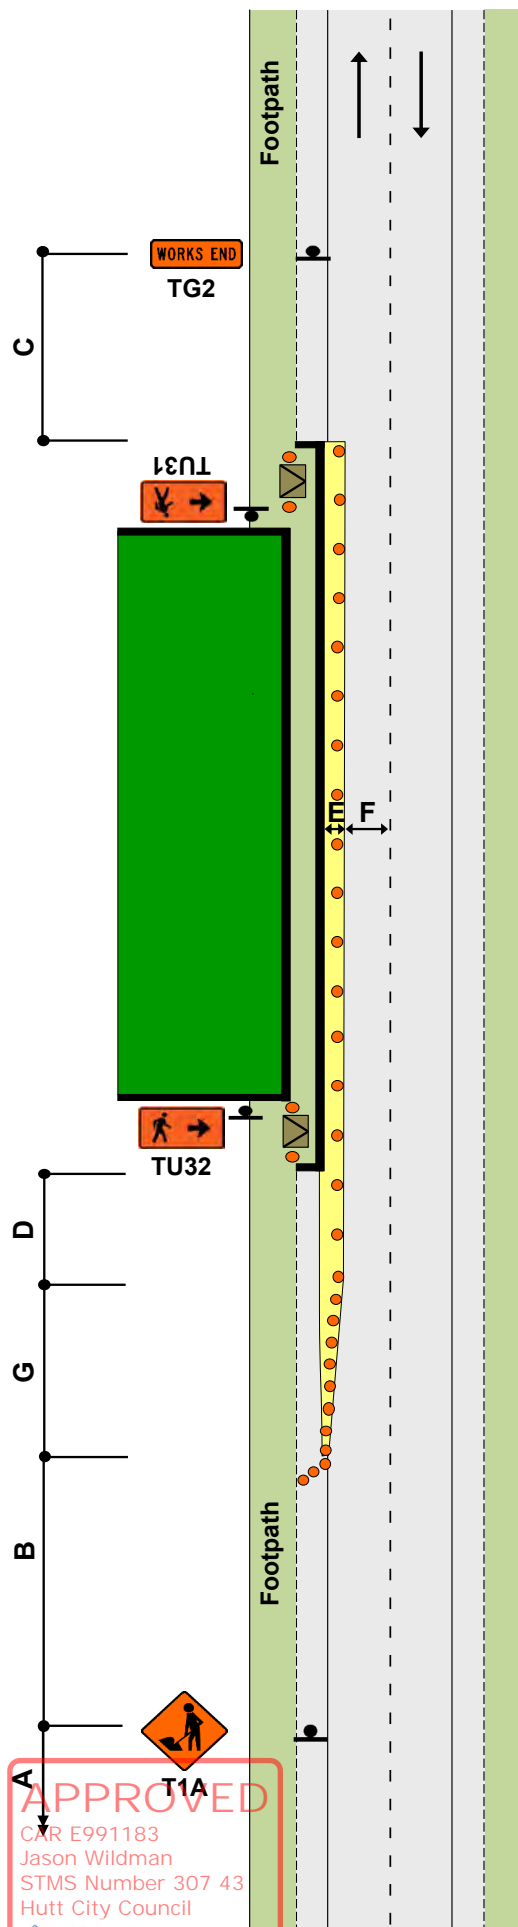

APPROVED  
CNR E991183  
Jason Wildman  
STMS Number 307 43  
Hutt City Council  
*Wildman*  
18 December 2022

FOOTPATH


Footpath closed - permanent speed less than 65km/h  
Fourth preference

F2.4  
Level 1

Notes

1. Use T2A and PEDESTRIANS supplementary plate to alert road users to the potential of footpath users crossing the carriageway
2. Use safety fence at each end of working space
3. Use kerb ramps
4. Use another TMD as well, where working space/safety zone encroaches on live lane
5. This TMD must be used in conjunction with appropriate TTM for any work carried out on the shoulder or in the live lane

TMC comment - TSL is to be installed as additional TTM

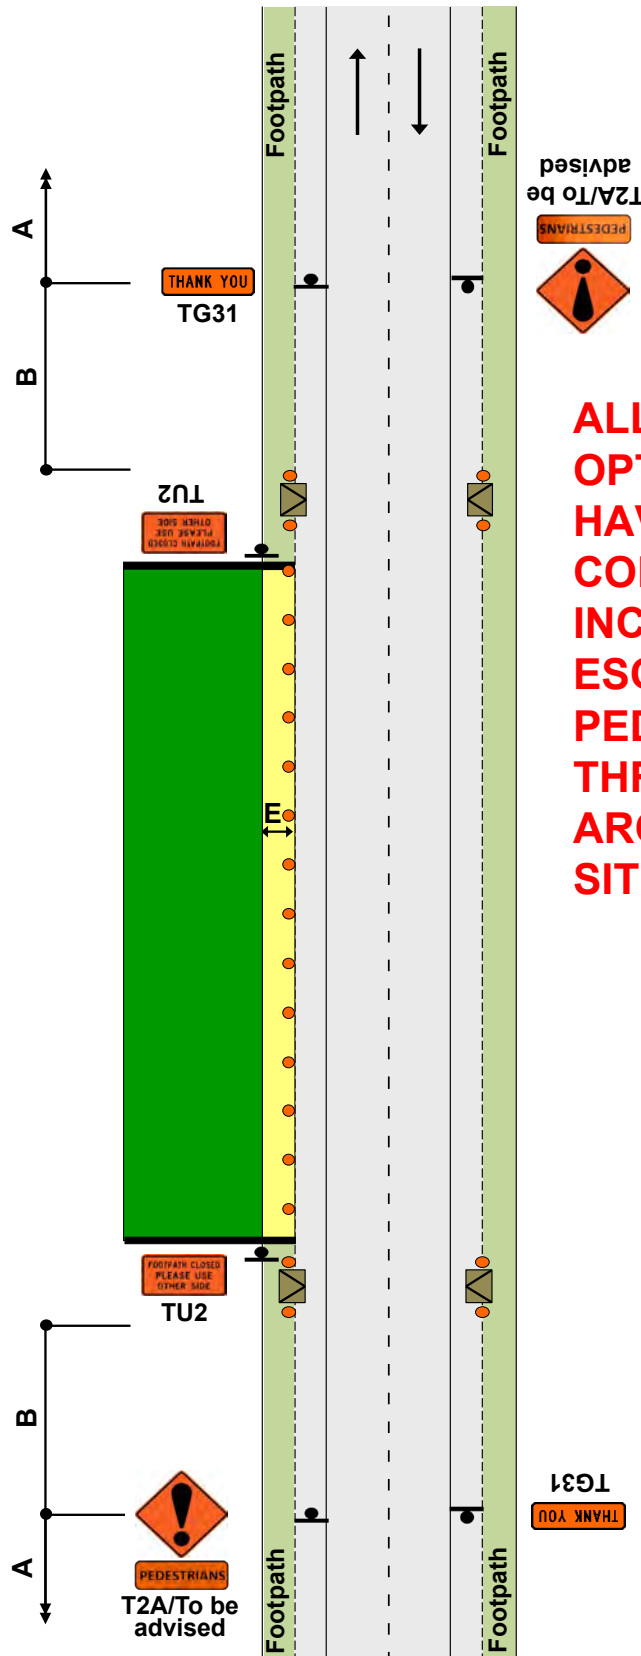

**ALL OTHER OPTIONS TO HAVE BEEN CONSIDERED INCLUDING ESCORTING PEDESTRIANS THROUGH/ AROUND THE SITE**


**APPROVED**

CAR E991183  
Jason Wildman  
STMS Number 30743  
Hutt City Council

*Wildman*  
18 December 2023

# CC7 - Valve in shoulder or on berm

Mobile operations

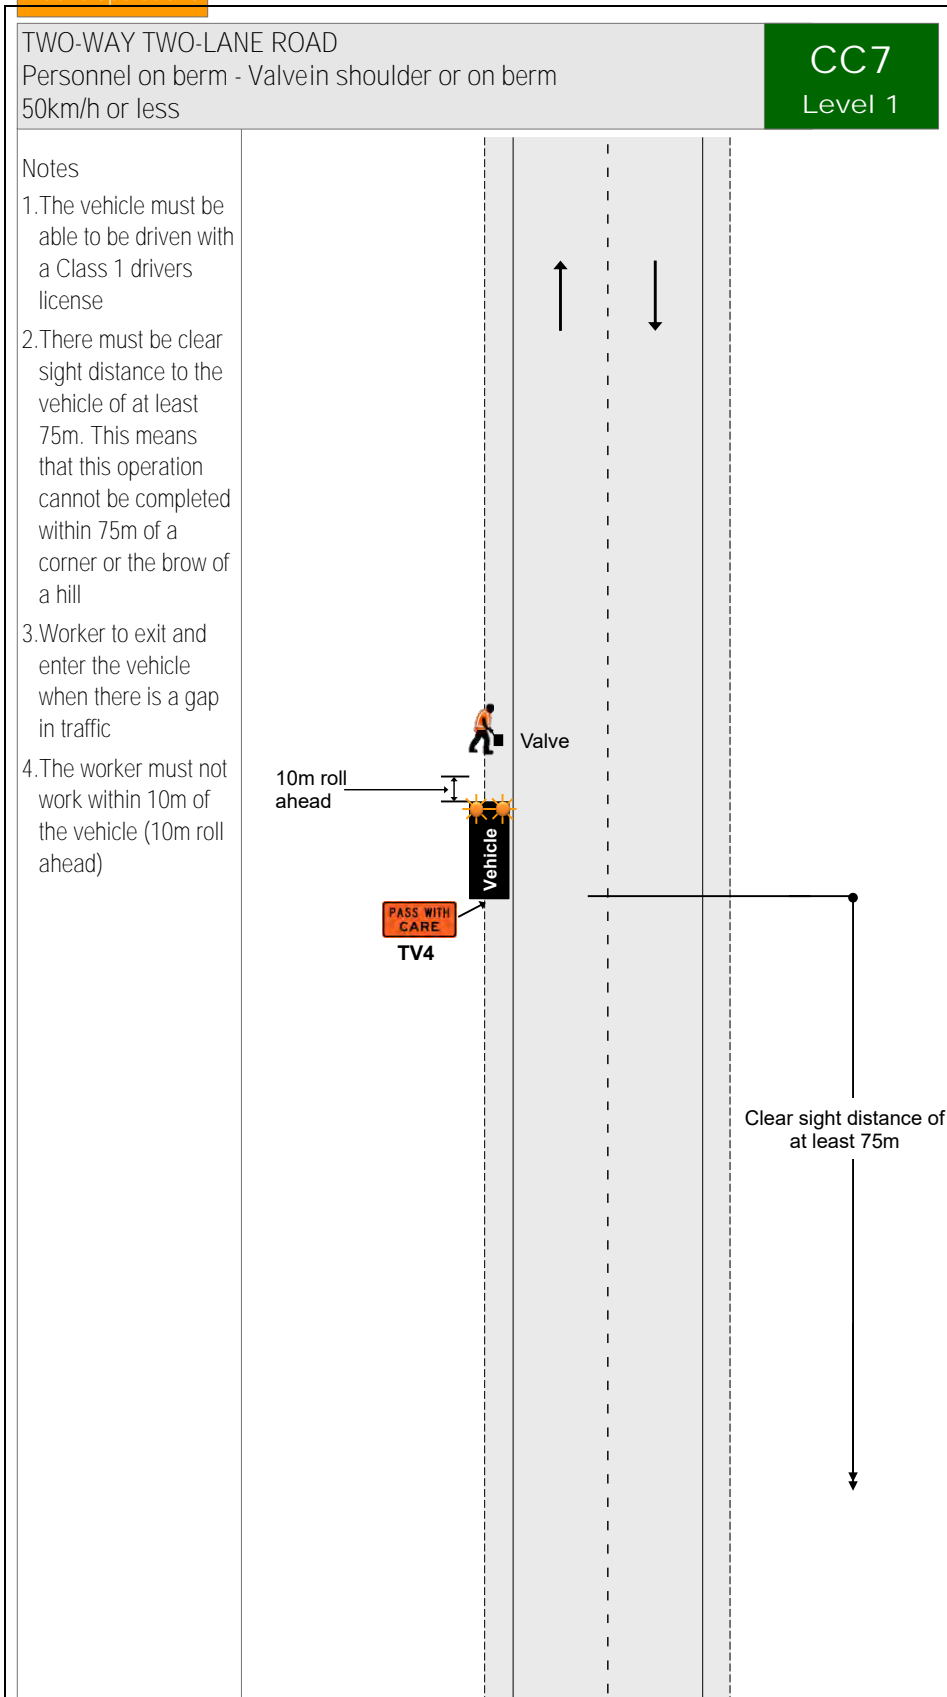

**APPROVED**

CAR E991183  
Jason Wildman  
STMS Number 307 43

*Jason Wildman*

18 December 2023

SHOULDER AND ROADSIDE ACTIVITIES


Work on berm and/or footpath

Permanent speed less than 65km/h

F2.5  
Level 1

Notes

1. Where work is carried out on the berm or footpath and a work vehicle is parked in a legal parallel car park, provided the vehicle is only accessed from the off traffic side, advance warning T1A road works and TG2 WORKS END are optional
2. Traffic management must be provided where footpath users or cyclists are affected
3. This layout may only be used during daylight hours
4. Large plant and machinery must not be used in this situation, a more substantial closure is required

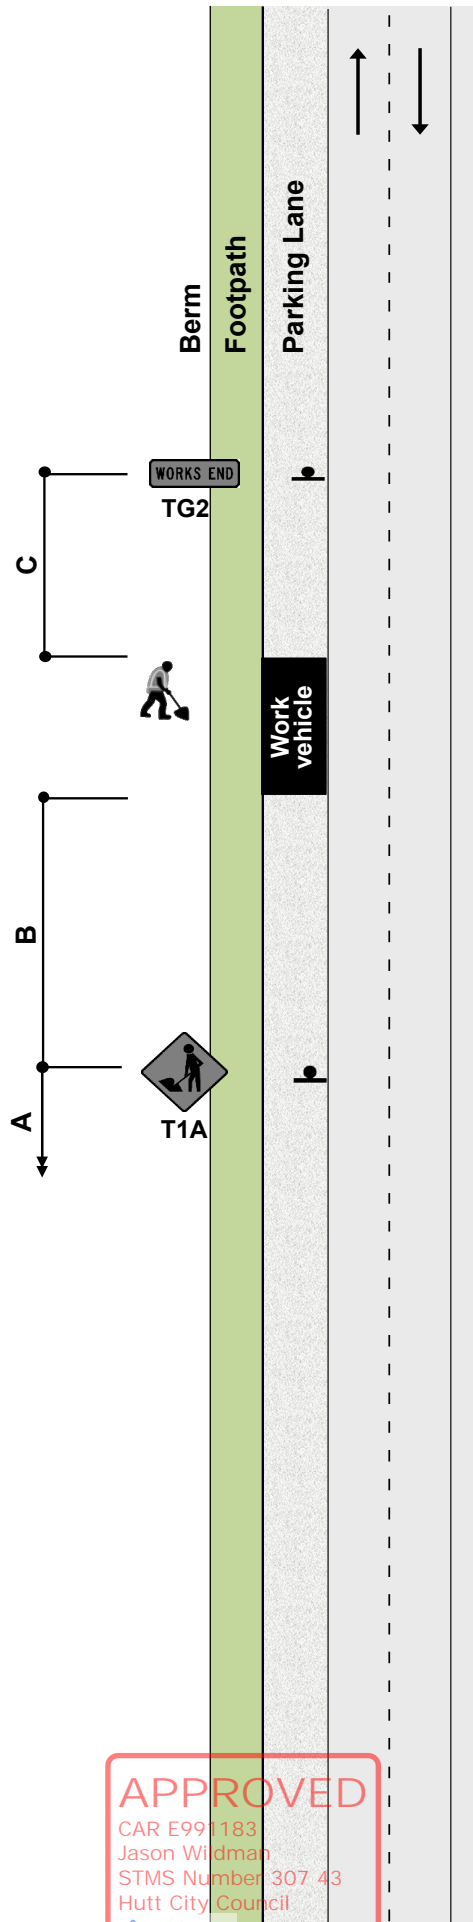

**APPROVED**  
 CAR E991183  
 Jason Wildman  
 STMS Number 307.43  
 Hutt City Council  
*Jason Wildman*  
 18 December 2022

SHOULDER AND ROADSIDE ACTIVITIES

Work in parking lane

Permanent speed less than 65km/h

Notes

1. Where work is carried out in the legal parking lane (a place where a vehicle would normally park with a footpath and/or kerb and channel alongside), the following minimum standard of TTM must be provided:

- a 10m taper in front of the work vehicle
- cones alongside the work vehicle and the working space
- a longitudinal safety zone
- a 1m lateral safety zone along the working space
- a T1A (or other appropriate advance warning sign) mounted on the back of the work vehicle


2. T1A road works and TG2 WORKS END signs are optional

3. The work vehicle must be no larger than a light truck and may have an amber flashing beacon

4. Traffic management must be provided where footpath users or cyclists are affected

5. This layout may only be used during daylight hours

6. Large plant and machinery must not be used in this situation, a more substantial closure is required

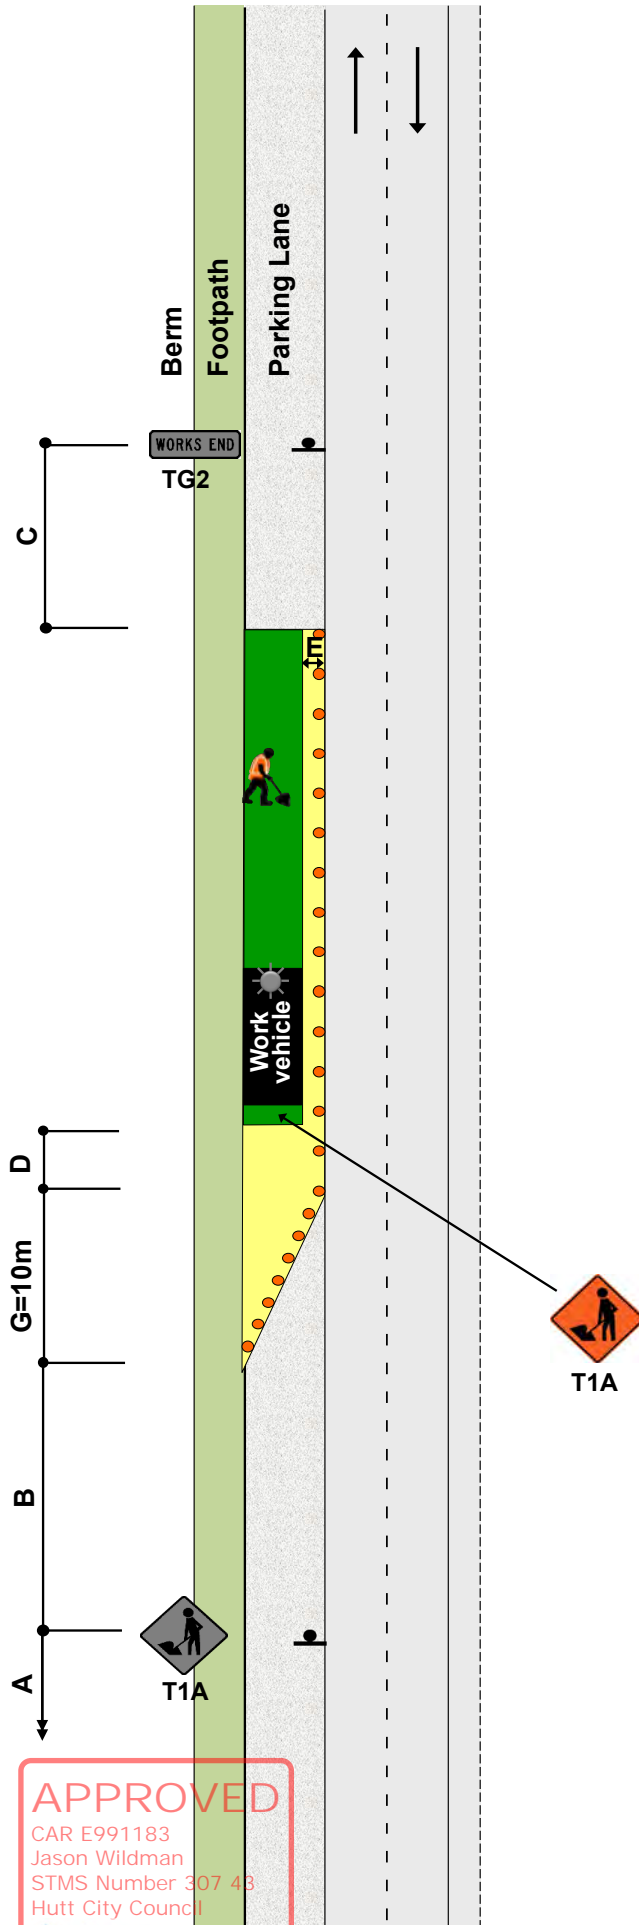

APPROVED

CAR E991183  
Jason Wildman  
STMS Number 307 43  
Hutt City Council

*Wildman*

Section F

Notes

1. A 10m taper is allowed where shoulder width is less than 2.5m


2. \*For shoulders exceeding 2.5m width, apply the following calculation; calculation of taper length for lateral shift of less than 3.5m is:

$W \times G$

3.5

W = Width of shoulder

G = Taper length in metres from the level 1 layout distance table

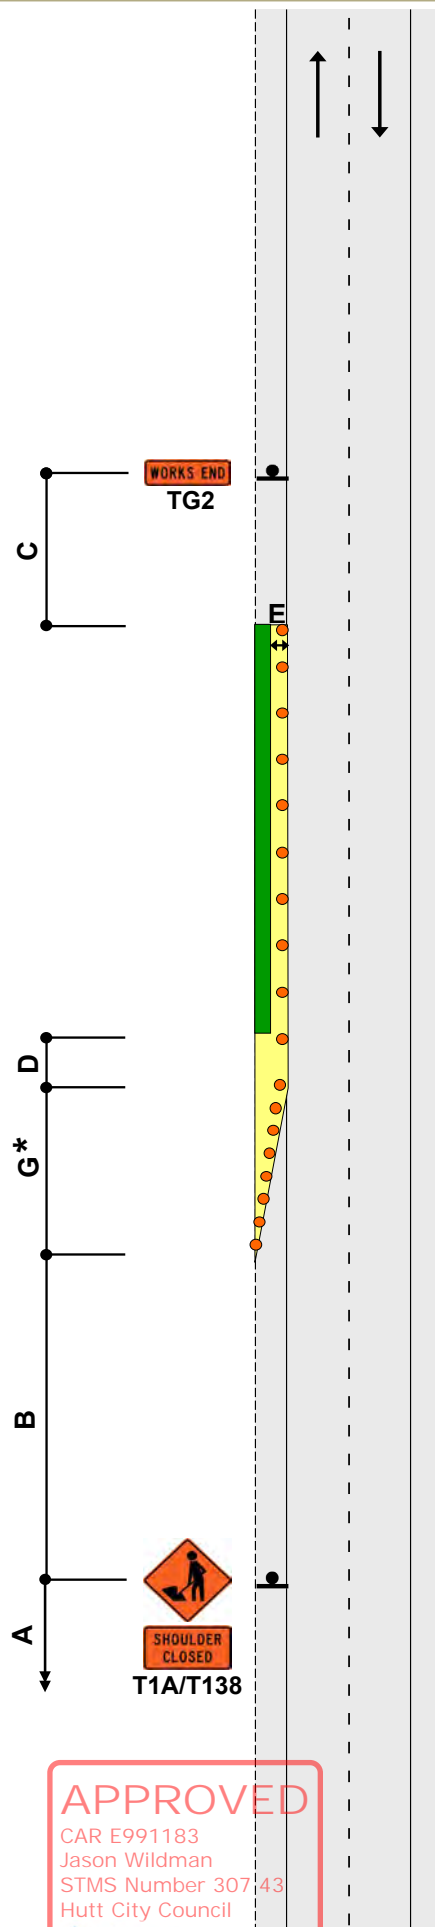

APPROVED

CAR E991183  
Jason Wildman  
STMS Number 307143  
Hutt City Council

*Jason Wildman*




**Static operations**

**TWO-WAY TWO-LANE ROAD  
Traffic not crossing road centre**

**F2.11  
Level 1**

**Notes**


- 1.\*Calculation of taper length for lateral shift of less than 3.5m is:  
 $W \times G$   
 3.5  
 W = Width of lateral shift  
 G = Taper length in metres from the level 1 layout distance table
- 2.If traffic likely to cross the centreline, place cones on the centreline with RD6L signs at each end
- 3.Use TSLs if required by TSL decision matrix
- 4.If TSLs not required, the T1A and TG2 signs on the right hand side of the road are also not required
- 5.The T144 X0km/h AHEAD sign is optional

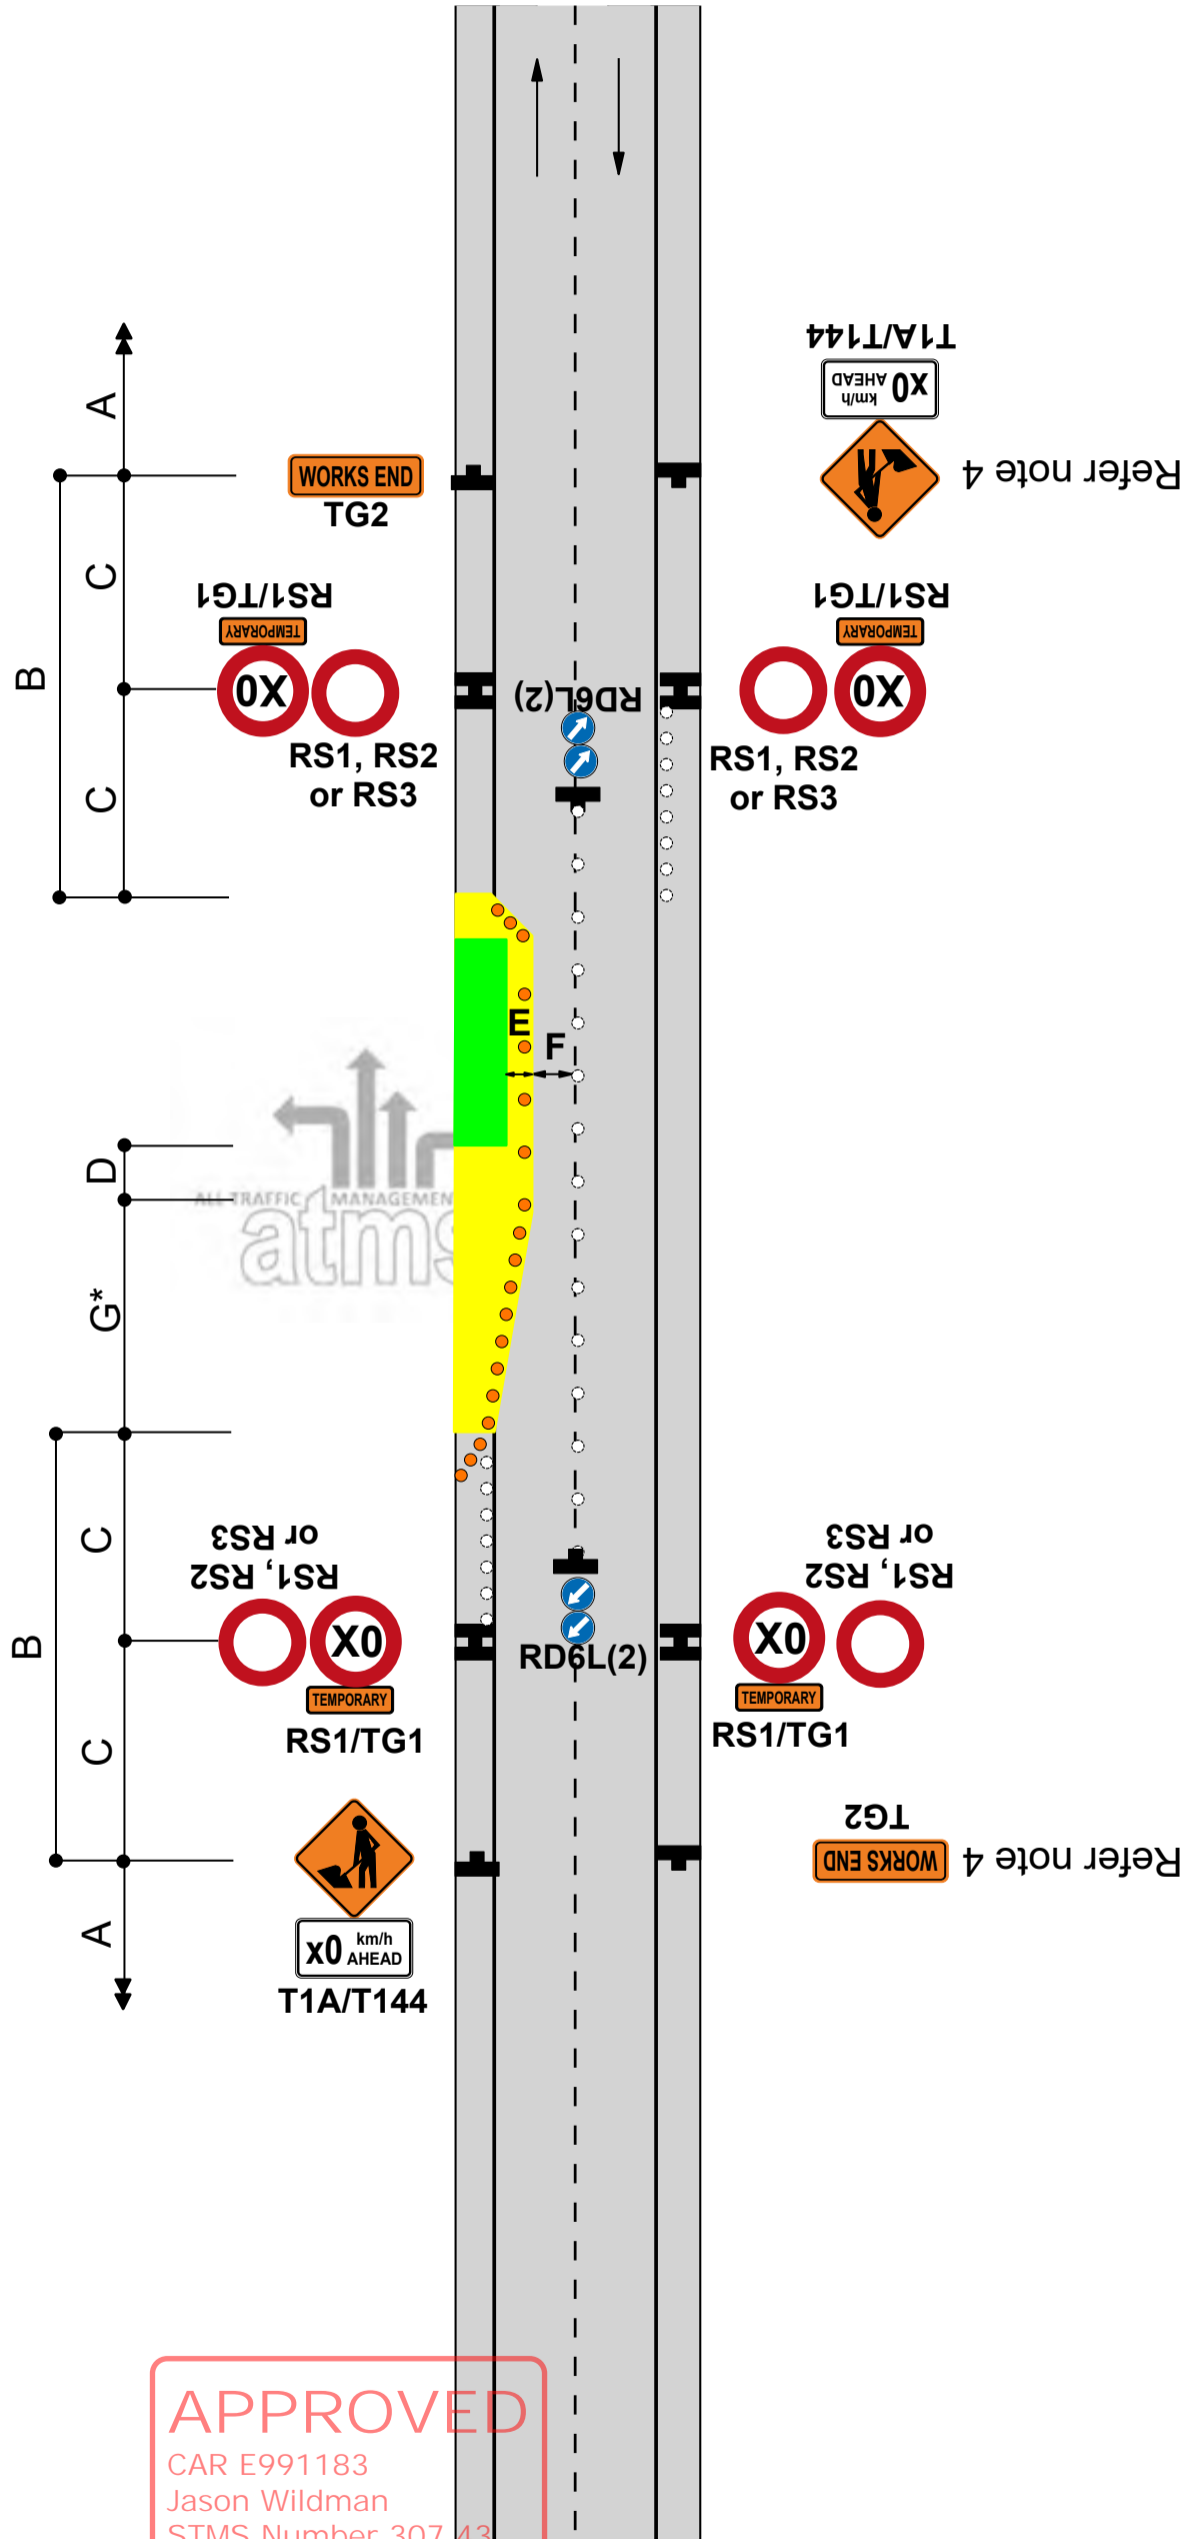

**APPROVED**  
 CAR E991183  
 Jason Wildman  
 STMS Number 307 43  
 Hutt City Council  
 18 December 2023

Notes

1. Use this diagram if signs will not be visible on left-hand side of road, or if it is safer to place signs on median and this will not interfere with turning traffic movements
2. Where a median exists which is more than 2m wide, the signs may be positioned on the median. Signs must be placed back-to-back unless on a solid median
3. Where there is a solid median, signs are not required in the opposing direction
4. \*Calculation of taper length for lateral shift of less than 3.5m is:  
$$\frac{W \times G}{3.5}$$
  
W = Width of lateral shift  
G = Taper length in metres from the level 1 layout distance table
5. Use TSLs if required by TSL decision matrix
6. The T144 X0km/h AHEAD sign is optional

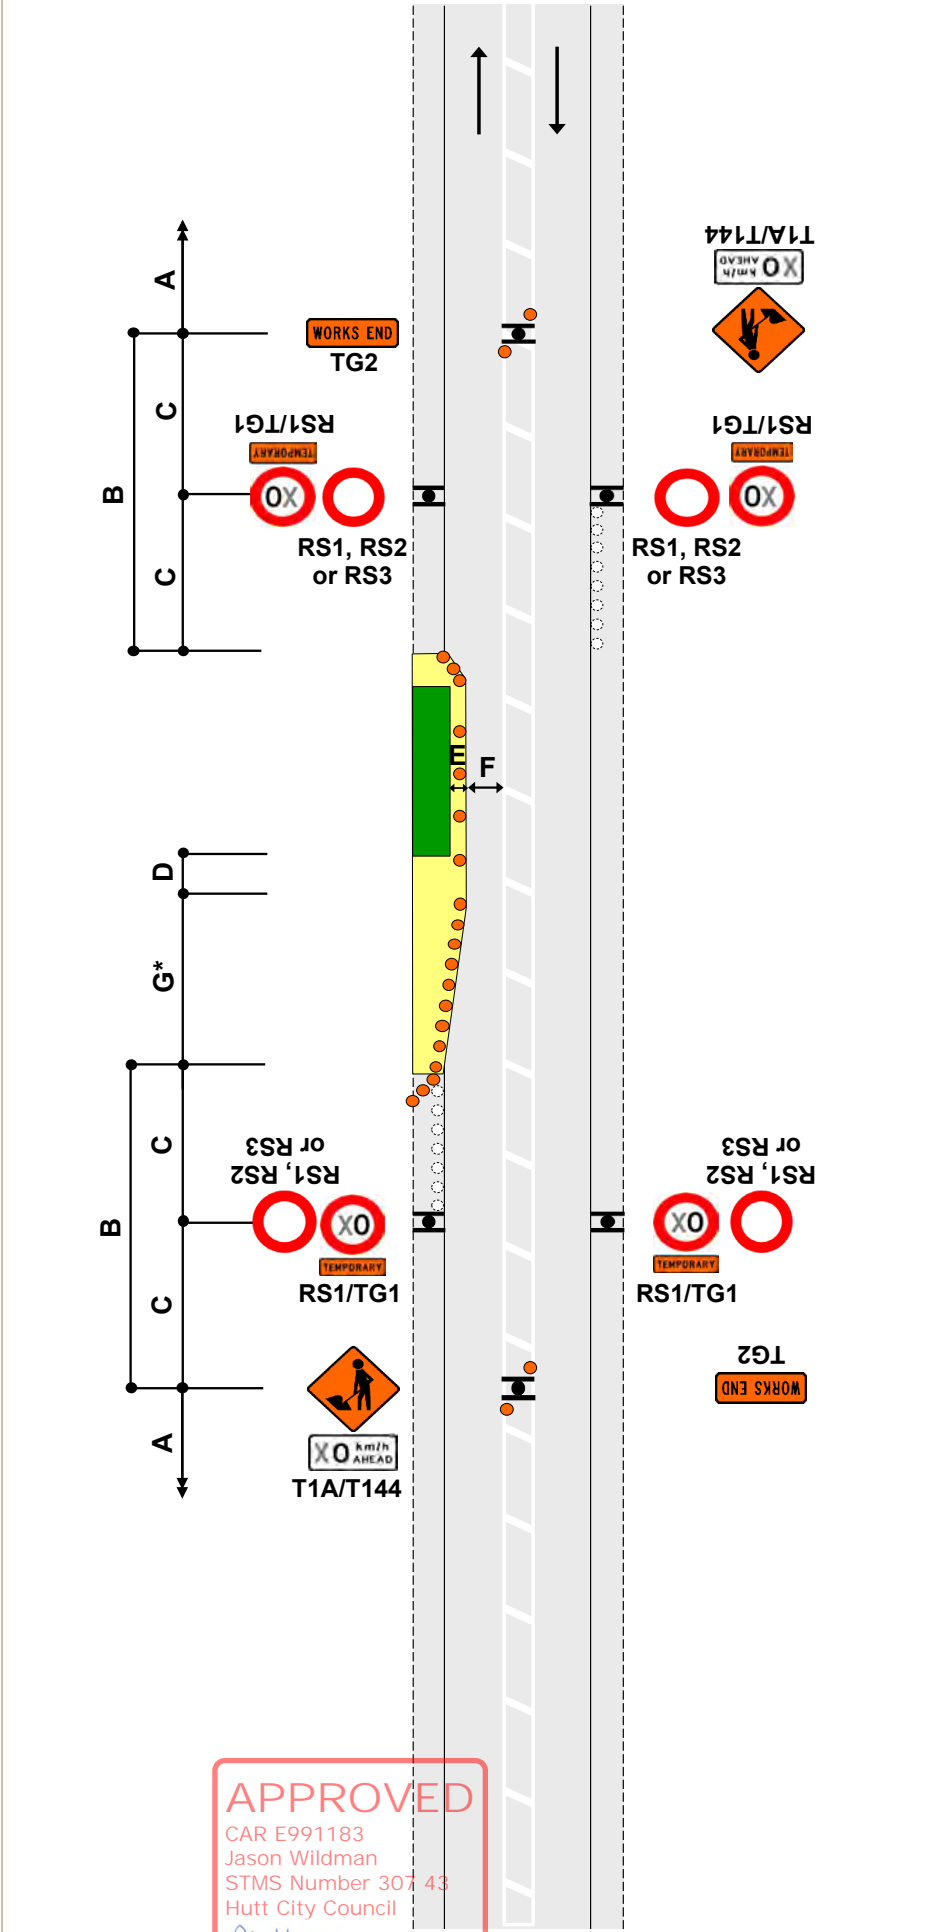


**APPROVED**  
CAR E991183  
Jason Wildman  
STMS Number 307 43  
Hutt City Council  
*J Wildman*

INSPECTION ACTIVITIES AND NON-INVASIVE WORKS  
 On shoulder and on the live lane  
 This TMD may also be applied on level LV roads

**F4.10**  
**Level 1**

- Notes
1. Inspectors must move from live lanes to avoid traffic. They must not expect traffic to drive slowly or drive around them
  2. On level LV and level 1 roads, a person completing an inspection or non-invasive works cannot be on a live lane for more than 5 minutes
  3. Unless otherwise approved by the RCA, all inspections on the live lane of level 1 roads require a spotter. The RCA may provide a list of roads, times and/or activities suitable for inspection by a single inspector
  4. There must be CSD to the inspector when on the live lane. If this cannot be achieved, a spotter must be placed in a position where CSD can be attained and verbal instructions be given to the inspector. If this is not possible, a static or mobile operation is required.
  5. A spotter is not required for inspections and non-invasive works on level LV roads or working off the live lane of a level 1 road
  6. Where an unaccompanied inspector is not able to maintain adequate attention (eg due to work tasks or poor visibility), a spotter will be required or another type of traffic management operation used
  7. For inspection activities that are carried out by a TC on level LV and level 1 roads the STMS must be immediately contactable but does not have to be within 30 minutes travel time of the worksite
  8. An unaccompanied inspector may walk across a level LV or level 1 road
  9. A vehicle is not required on a level LV or level 1 road with a permanent speed of less than 65km/h if the inspector remains on a footpath
  10. On roads with a permanent speed of less than 65km/h an amber flashing beacon is not required on the vehicle if the inspector or non-invasive works is on an unsealed shoulder (or further away from the carriageway - including a footpath)

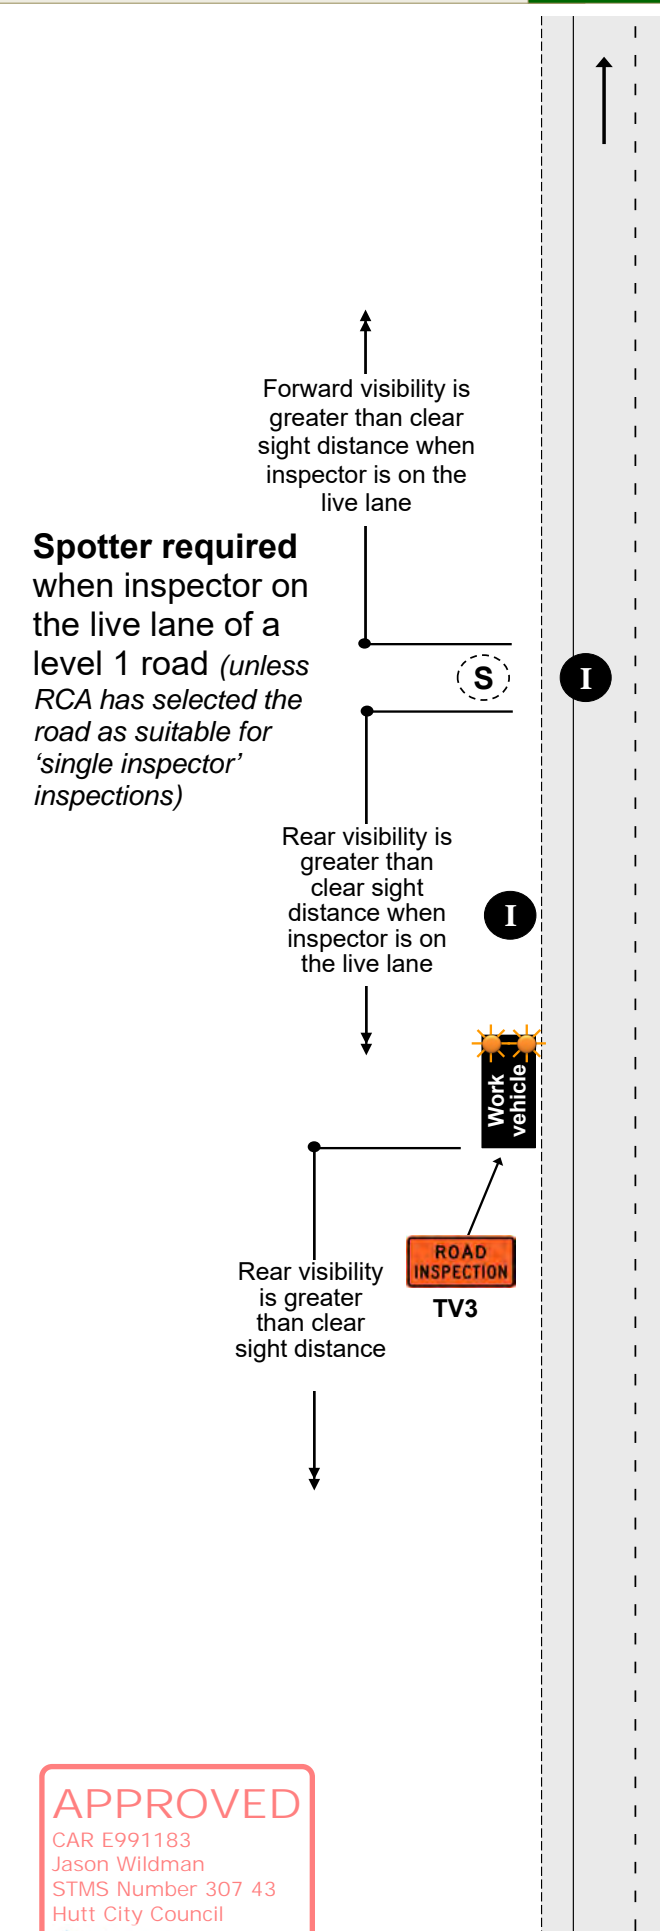

**Spotter required when inspector on the live lane of a level 1 road (unless RCA has selected the road as suitable for 'single inspector' inspections)**

**APPROVED**  
 CAR E991183  
 Jason Wildman  
 STMS Number 307 43  
 Hutt City Council  
*Wildman*

**Mobile operations**

**INSPECTION ACTIVITIES AND NON-INVASIVE WORKS**

**Inspection Activity - Centre Of Road**


This TMD may also be applied on level LV roads

**ATMS07**

**Level 1**

**Notes**

1. Inspectors must move from live lanes to avoid traffic. They must not expect traffic to drive slowly or drive around them
2. On level LV and level 1 roads, a person completing an inspection or non-invasive works cannot be on a live lane for more than 5 minutes
3. Unless otherwise approved by the RCA, all inspections on the live lane of level 1 roads require a spotter. The RCA may provide a list of roads, times and/or activities suitable for inspection by a single inspector
4. There must be CSD to the inspector when on the live lane. If this cannot be achieved, a spotter must be placed in a position where CSD can be attained and verbal instructions be given to the inspector. If this is not possible, a static or mobile operation is required.
5. Where an unaccompanied inspector is not able to maintain adequate attention (eg due to work tasks or poor visibility), a spotter will be required or another type of traffic management operation used
6. For inspection activities that are carried out by a TC on level LV and level 1 roads the STMS must be immediately contactable but does not have to be within 30 minutes travel time of the worksite
7. Inspectors MUST use 2 vehicles placed on either side of road shoulder. Inspector & spotter will use footpath to carry cones and cross when way is clear. Cones will be placed (min of 4 each direction) for protection. Spotter must not engage in work activities.

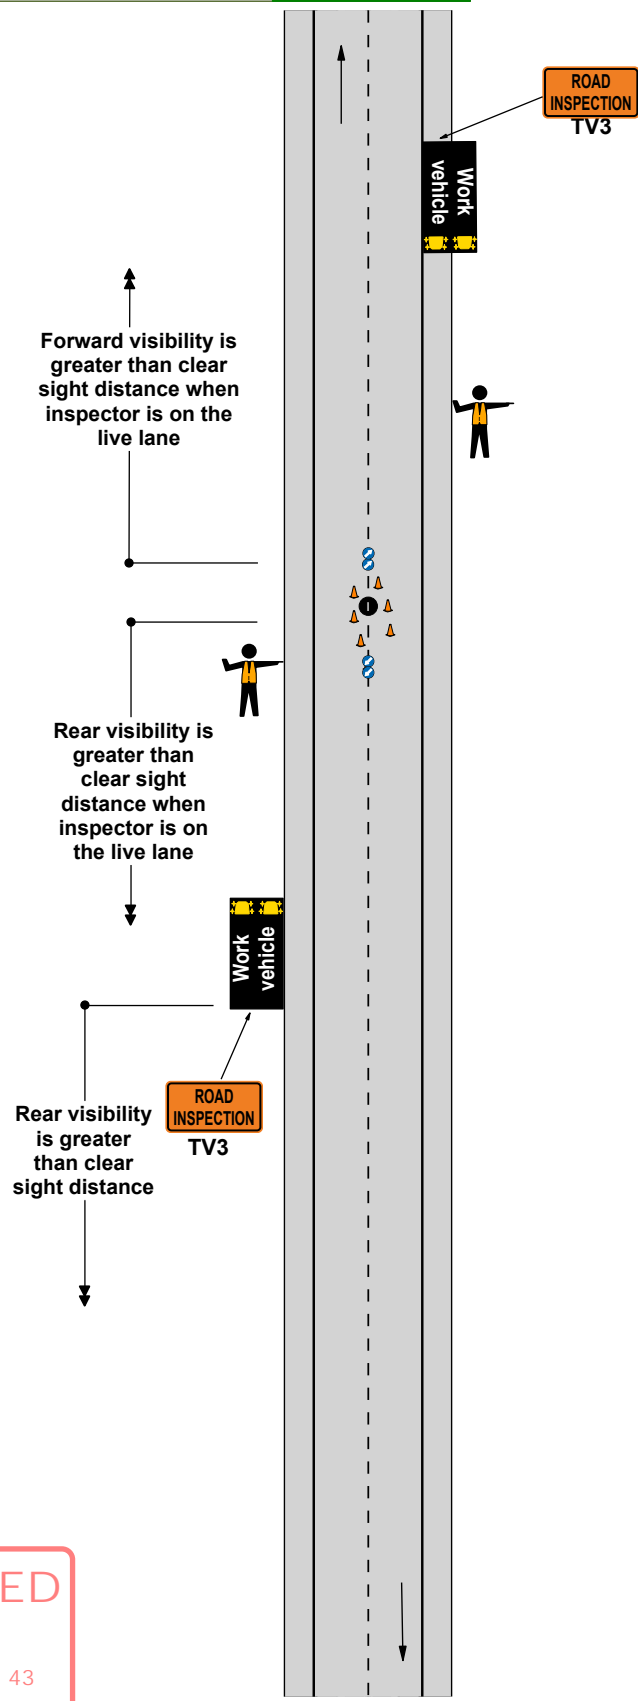

**APPROVED**

CAR E991183  
 Jason Wildman  
 STMS Number 307 43  
 Hutt City Council

*Jason Wildman*

18 December 2023


**Static operations**

**TWO-WAY TWO-LANE ROAD  
Traffic crossing road centre  
Two lane diversion**

**F2.13  
Level 1**

**Notes**

1. Cones are required on edge of the temporary lane opposite closure if road is not well defined
2. Return taper at end of closure may be shortened
3. \*Calculation of taper length for lateral shift of less than 3.5m is:  
 $W \times G$   
 3.5  
 $W$  = Width of lateral shift  
 $G$  = Taper length in metres from the level 1 layout distance table
4. To allow heavy vehicles to manoeuvre, cones in the channel must be offset by at least 10m where the direction changes. Refer C8.2.12
5. Use PN11 No Stopping signs, if necessary
6. Use TSLs if required by TSL decision matrix
7. The T144 X0km/h AHEAD sign is optional

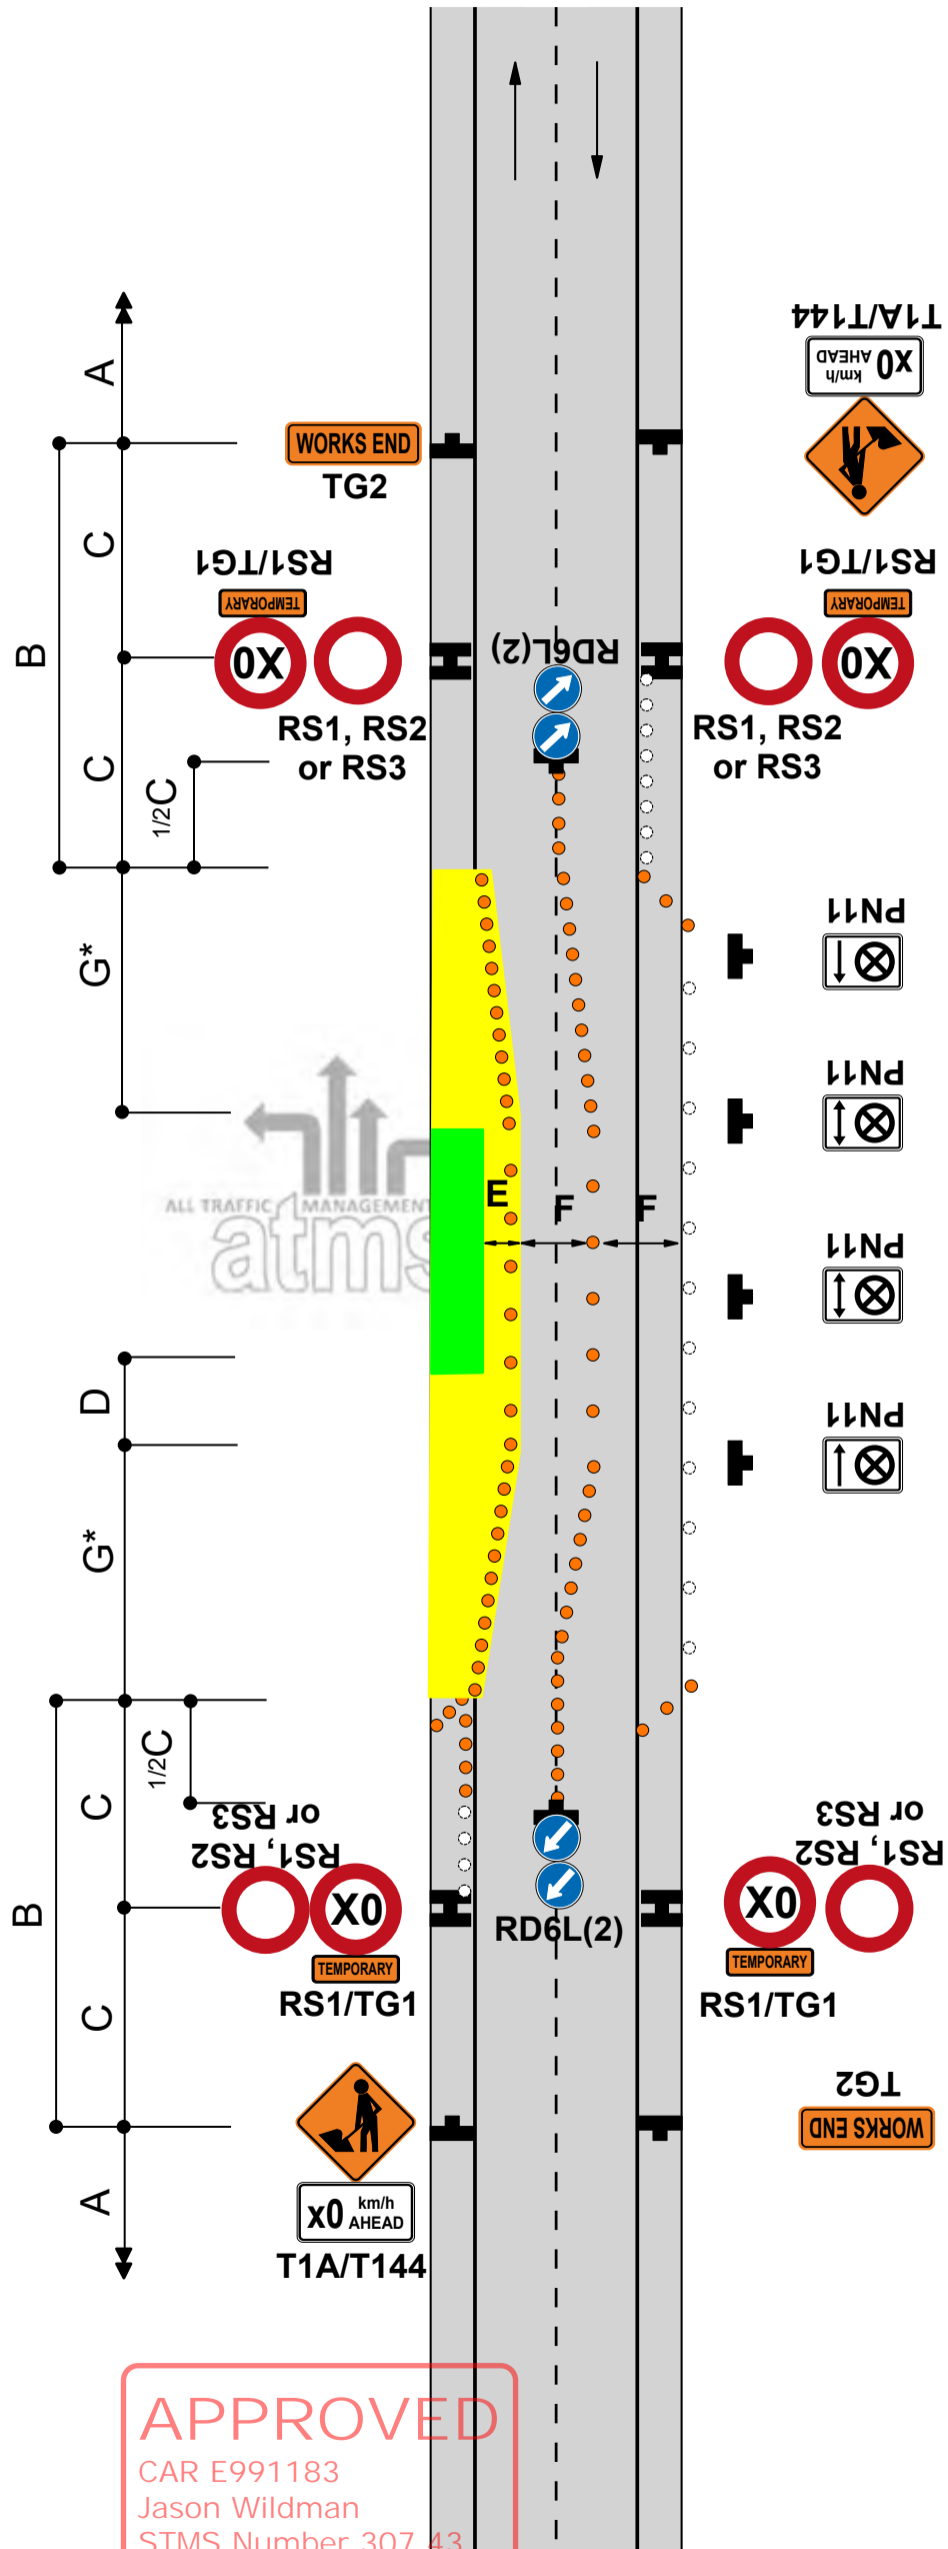

**APPROVED**  
 CAR E991183  
 Jason Wildman  
 STMS Number 307 43  
 Hutt City Council  
 18 December 2023

**TWO-WAY TWO-LANE ROAD**  
**Single-lane alternating flow**  
**Portable e-STOP**

**ATMS02**  
**Level 1**

Notes ~~THIS TMD IS NOT TO BE USED FOR ANY UNATTENDED PERIOD~~

TMC comment - TMP does not allow for any unattended sites

1. Provide details of make and model of portable traffic signals in the TMP

2. Use PN11 no stopping signs, if necessary as per the approved TMP

3. Install temporary RP61/RP62 signs



4. Minimum 5 cones in cone threshold.


5. Extend or place extra advance warning signs towards on-coming traffic beyond any expected traffic queues

6. CONTINGENCY PLAN:  
 F2.14 to be implemented should issues arise with e-STOP/ adverse weather conditions or where stop go is unsuitable.  
 ex; Short term stoppages is defined as "stopping traffic for a short period of time within a static site, at inconsistent intervals to assist with the entry/exit of vehicles or small tasks required to be undertaken in the live lane".

7. In circumstances where for safety reasons, the use of stop/go operations is deemed more appropriate, a site specific safe work method statement must be prepared.

8. The T144 30km/h AHEAD sign is optional on roads under 65km/h

9. e-STOP can only be used on an attended site. e-STOPS must be manned at all times.

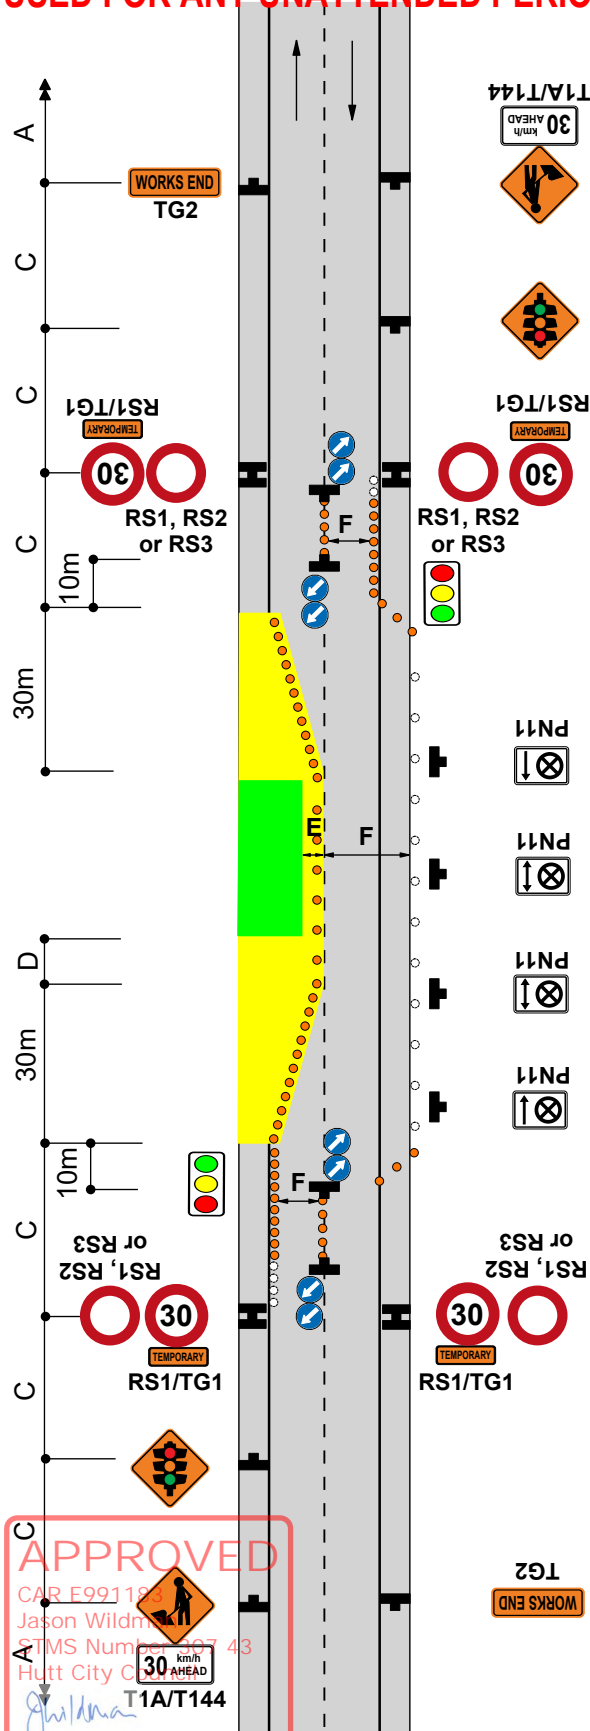

**APPROVED**  
 CAR E99118  
 Jason Wildman  
 STMS Number 107 43  
 Hutt City Council  
 T1A/T144  
 18 December 2023


**Static operations**

**TWO-WAY TWO-LANE ROAD  
Single-lane alternating flow  
Manual traffic control (STOP/GO or STOP/SLOW)**

**F2.14  
Level 1**

**Notes**

1. Extend or place extra advance warning signs towards on-coming traffic beyond any expected traffic queues
2. A 30m return taper at the end of the closure is mandatory
3. Cones are required on edge of the temporary lane opposite closure if road is not well defined
4. To allow heavy vehicles to manoeuvre, cones in the channel must be offset by at least 10m where the direction changes. Refer C8.2.12
5. Use PN11 no stopping signs, if necessary
6. MTC with RP4/RP41 STOP/GO or RP4/RP42 STOP/SLOW paddle on road shoulder located between 1st and 2nd cone in the cone threshold closest to the working space
7. Minimum 5 cones in cone threshold at:
  - 2.5m centres - less than 65km/h
  - 5m centres - more than 65km/h
8. Refer to C10.2.3 MTC essentials for further information
9. Delays cannot exceed the time approved by the RCA (normally 5 to 10 minutes)
10. The T144 30km/h AHEAD sign is optional

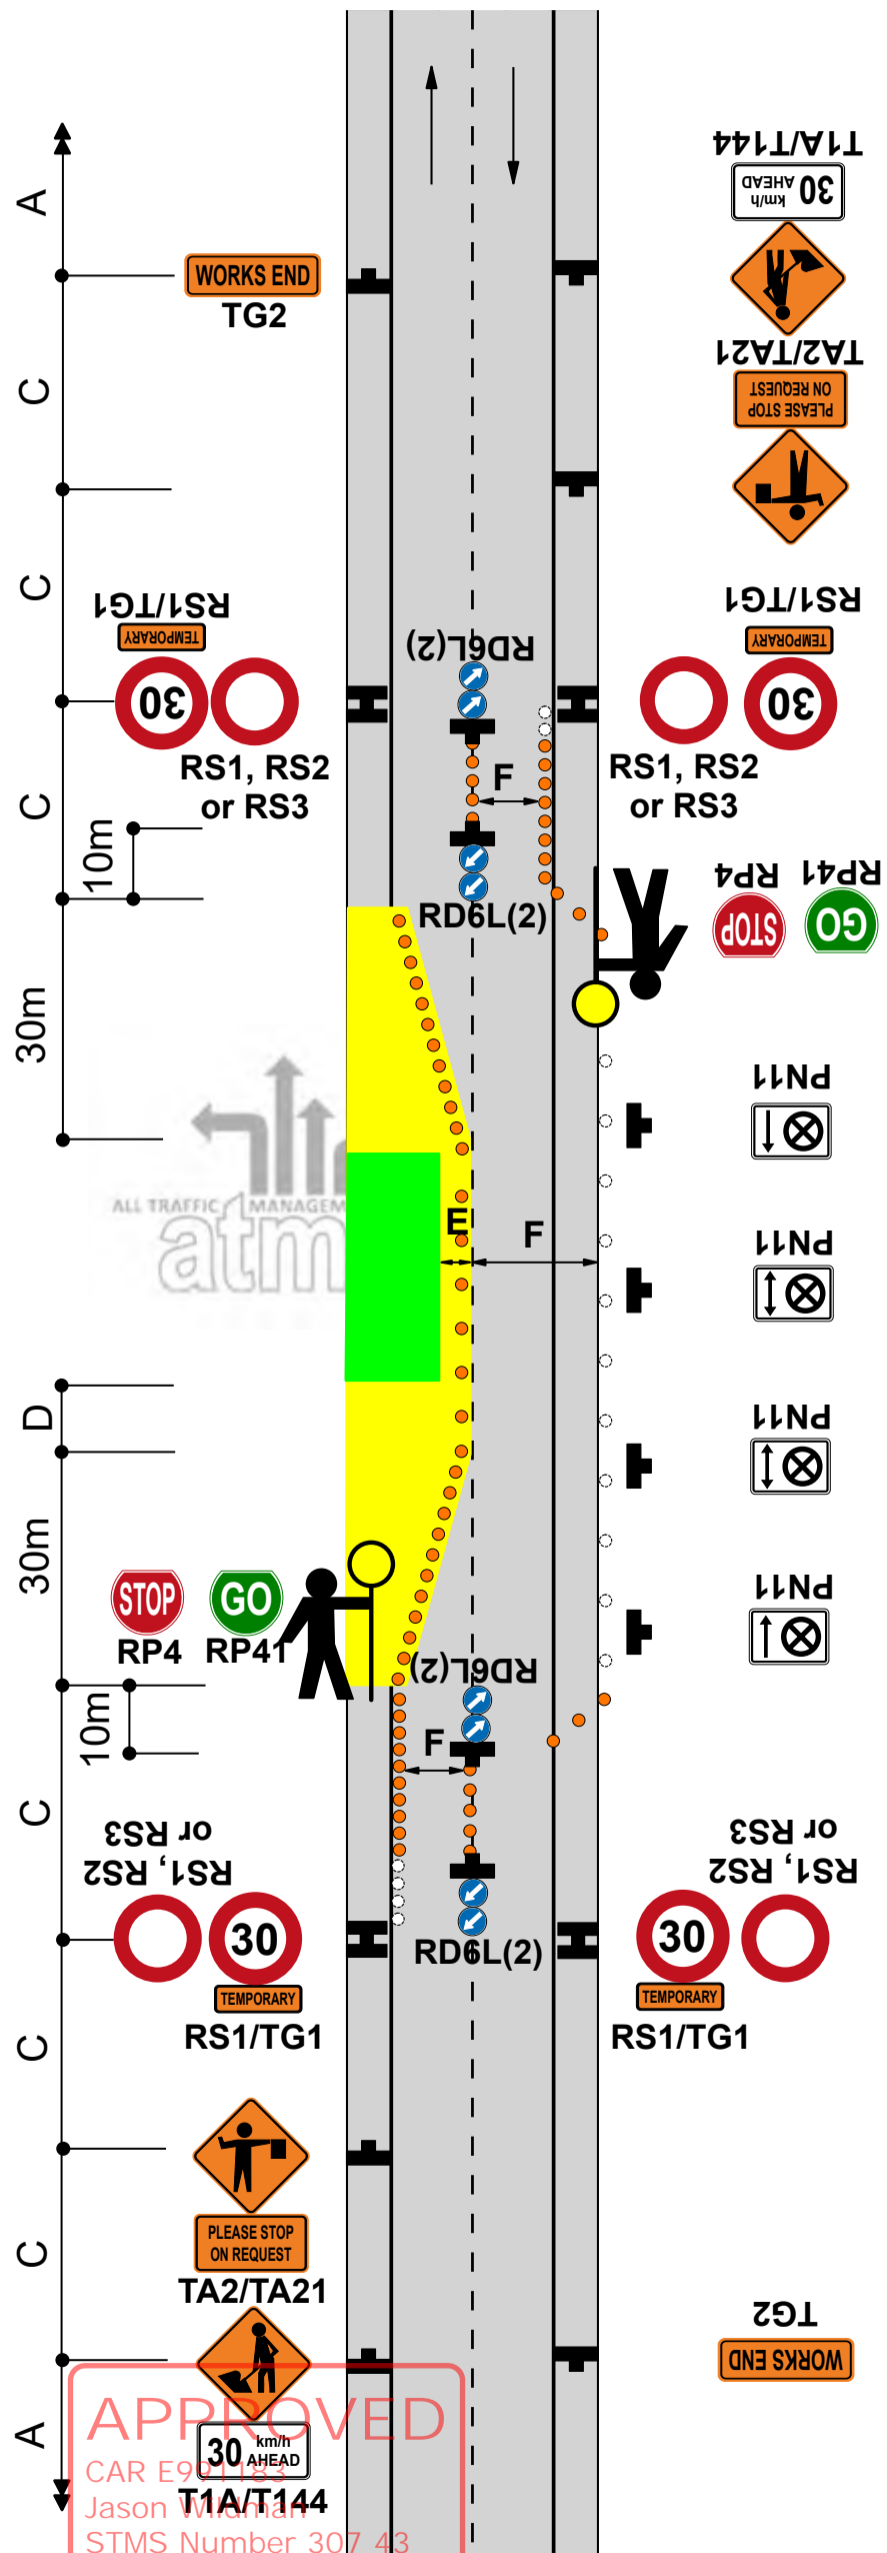

APPROVED  
 CAR 9  
 Jason Williams  
 STMS Number 307 43  
 Hutt City Council  
 18 December 2023


**Static operations**

**TWO-WAY TWO-LANE ROAD - Intersection or roundabout  
Closure at an intersection  
Portable e-STOP - with MTC on side roads**

**ATMS04  
Level 1**

**Notes**

1. This plan can be used at a 3 way intersection by removing one of the approaches. If you require a temporary traffic light/MTC set up, which is greater than a four way, you will require a site specific TMP.
2. Signs and layout shown in the box at the bottom of the diagram is to be repeated on each approach.
3. Provide details of make and model of portable traffic signals in the TMP
4. Use PN11 no stopping signs, if necessary as per the approved TMP
5. Install temporary RP61/RP62 signs
6. Minimum 5 cones in cone threshold.
7. Extend or place extra advance warning signs towards on-coming traffic beyond any expected traffic queues
8. CONTINGENCY PLAN: F2.22 to be implemented should issues arise with e-STOP/ adverse weather conditions or where stop go is unsuitable. ex; Short term stoppages is defined as "stopping traffic for a short period of time within a static site, at inconsistent intervals to assist with the entry/exit of vehicles or small tasks required to be undertaken in the live lane".
9. In circumstances where for safety reasons, the use of stop/go operations is deemed more appropriate, a site specific safe work method statement must be prepared.
10. The T144 30km/h AHEAD sign is optional on roads under 65km/h
11. e-STOP can only be used on an attended site. e-STOPS must be manned at all times.

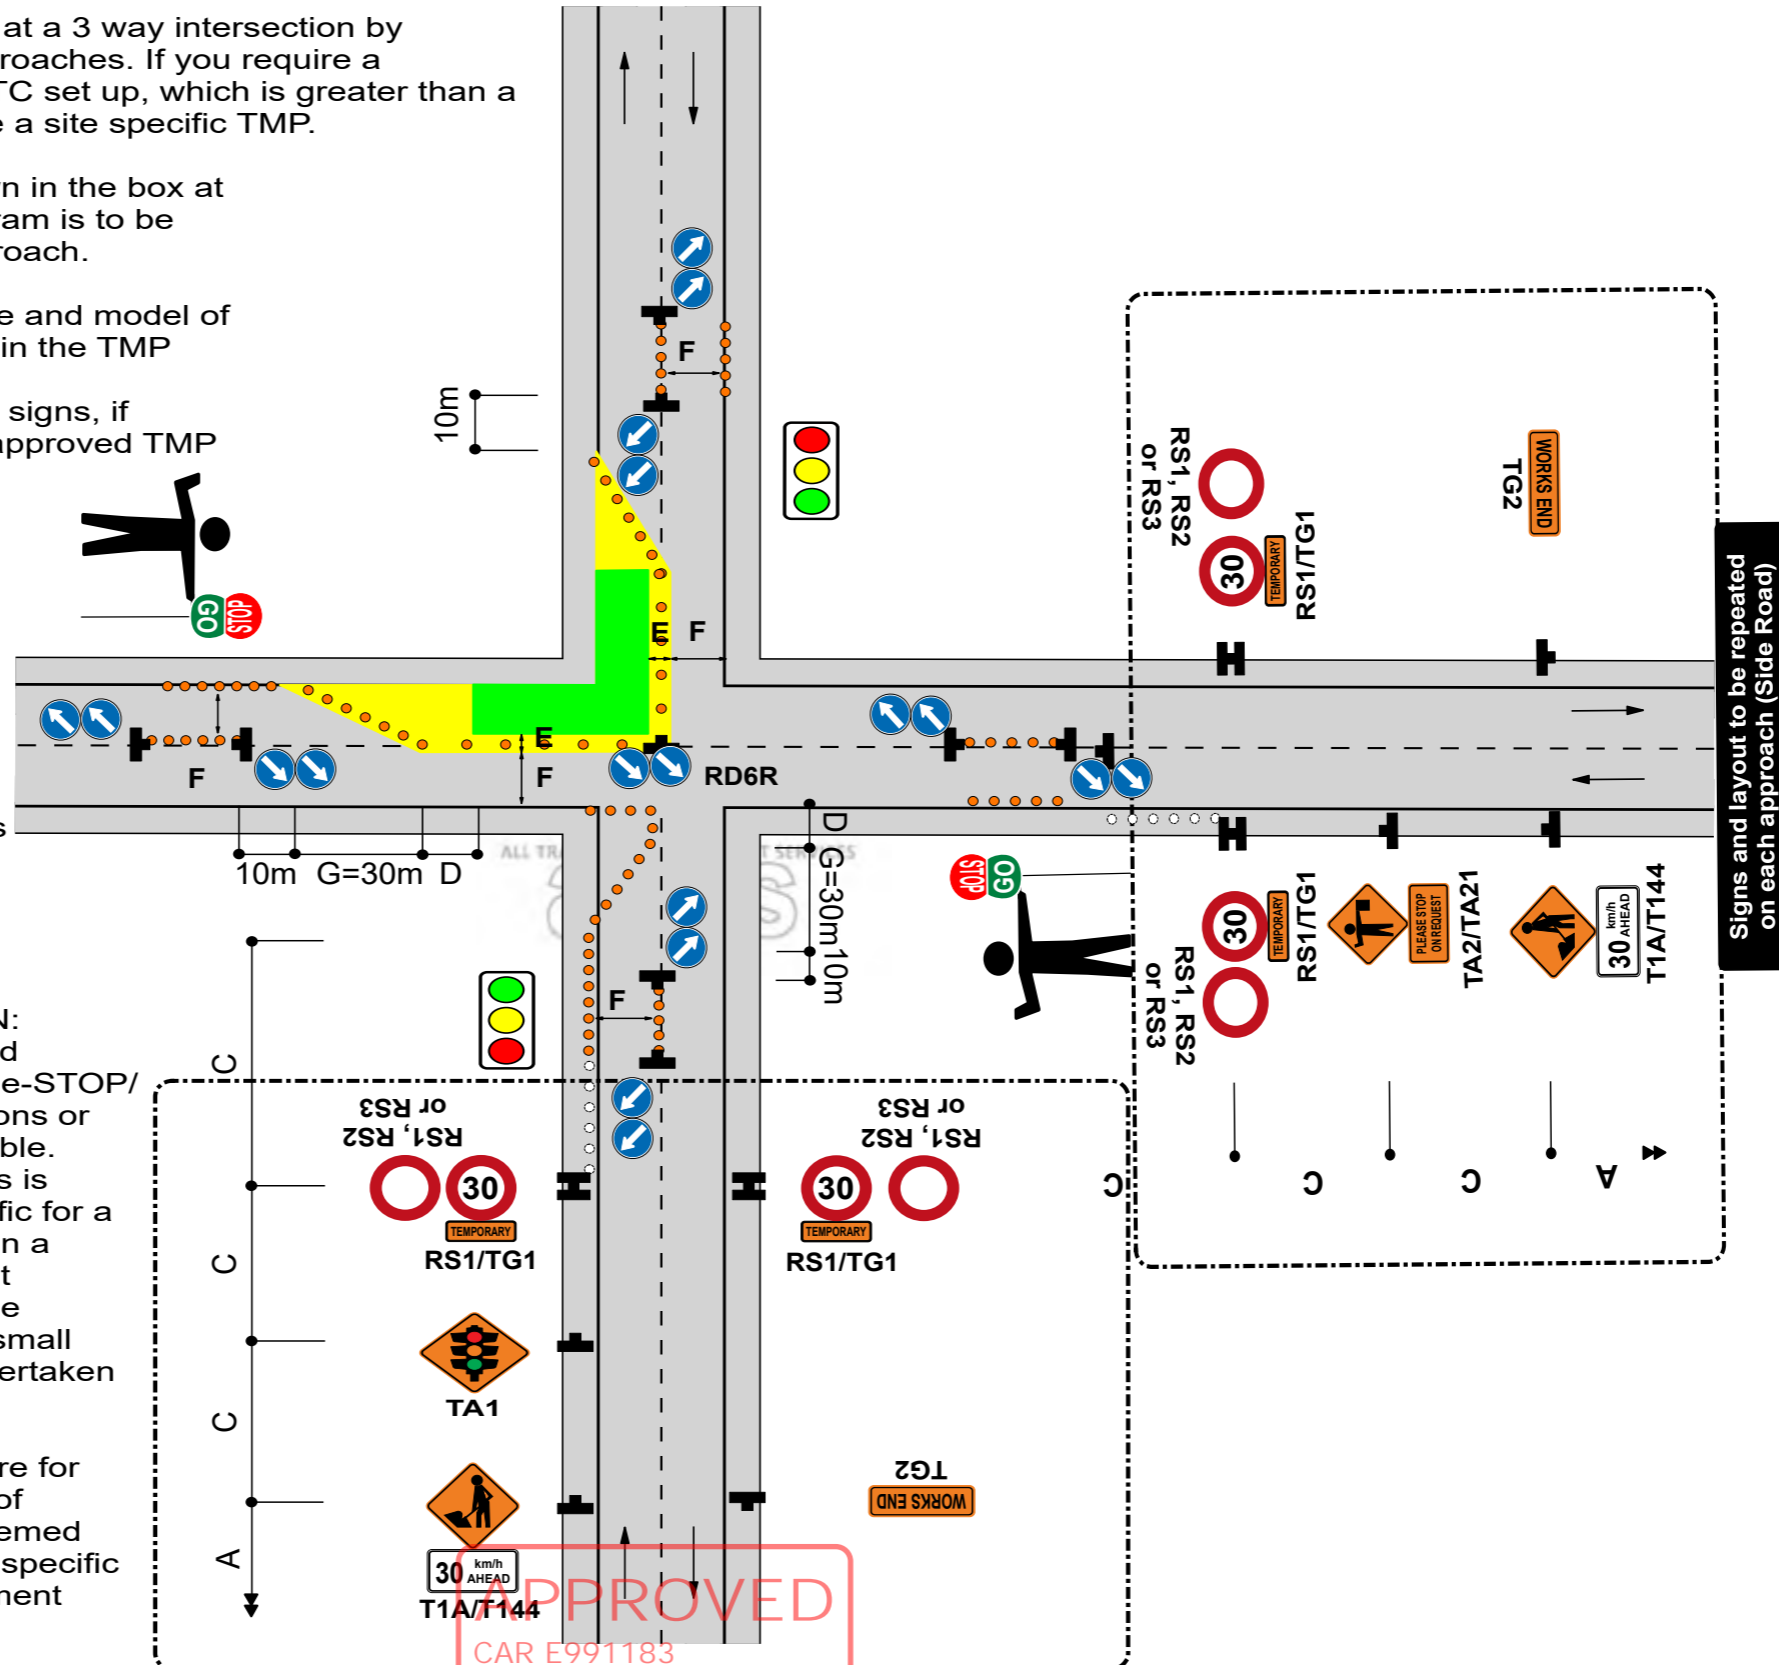

**APPROVED**  
 CAR E991183  
 Signs and layout to be repeated on each approach (Main Road)  
 Hutt City Council  
  
 18 December 2023

Signs and layout to be repeated on each approach (Side Road)




**Static operations**

**TWO-WAY TWO-LANE ROAD - Intersection or roundabout  
Closure at corner of an intersection  
Manual traffic control (Stop/Go or Stop/Slow)**

**F2.22  
Level 1**


**Notes**

1. This diagram may be used at a T intersection by removing any one of the roads
2. Signs and layout shown in the box at the bottom of the diagram is to be repeated on each approach
3. A 30m return taper at the end of the closure is mandatory
4. Use PN11 no stopping signs, if necessary
5. MTC with RP4/RP41 STOP/GO or RP4/RP42 STOP/SLOW paddle on road shoulder located between 1st and 2nd cone in the cone threshold closest to the working space
6. Minimum 5 cones in cone threshold at:
  - 2.5m centres - less than 65km/h
  - 5m centres - more than 65km/h
7. Refer to C10.2.3 MTC essentials for further information
8. On roads with a permanent speed limit of 100km/h, cones are required from the TSL to the taper if the speed is reduced by more than 30km/h
9. The T144 30km/h AHEAD sign is optional

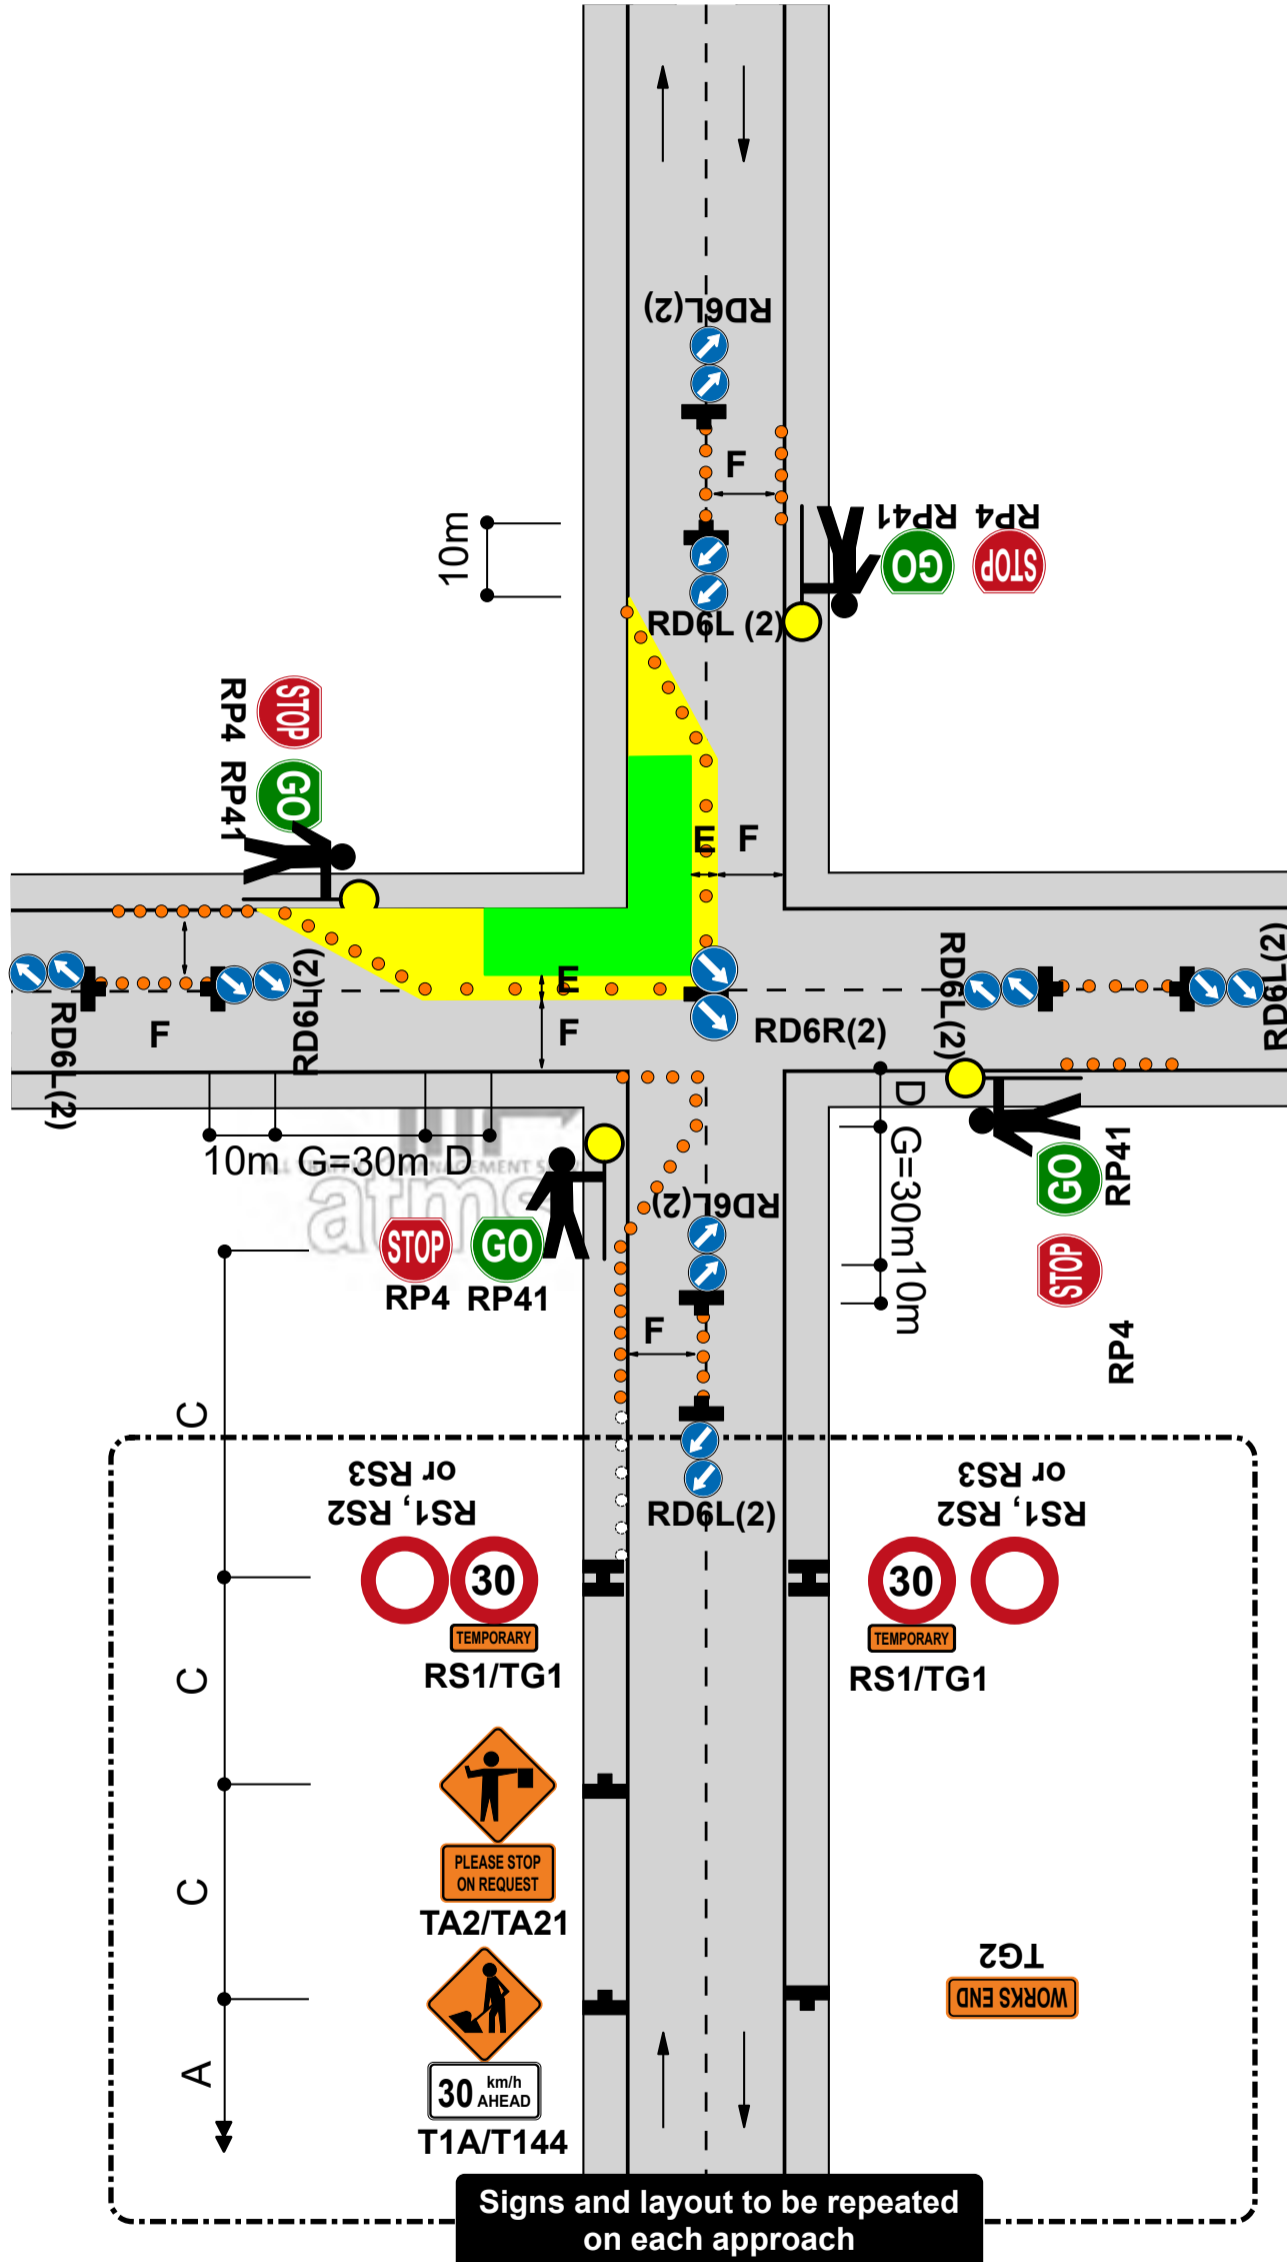

**APPROVED**  
 CAR E991183  
 Jason Wildman  
 STMS Number 307 43  
 Hutt City Council Section F  
*Wildman*  
 18 December 2023

**eSTOPs at locations with limited road width or shoulder**  
**The same risk assessment process should be undertaken for placement of eSTOPs on these types of roads as if a manual traffic controller was to be placed there.**  
**Ideally approval should be sought for a full road closure.**  
**Where this is not possible, placement of the eSTOP on the live lane within a coned area as per the example below should be considered:**

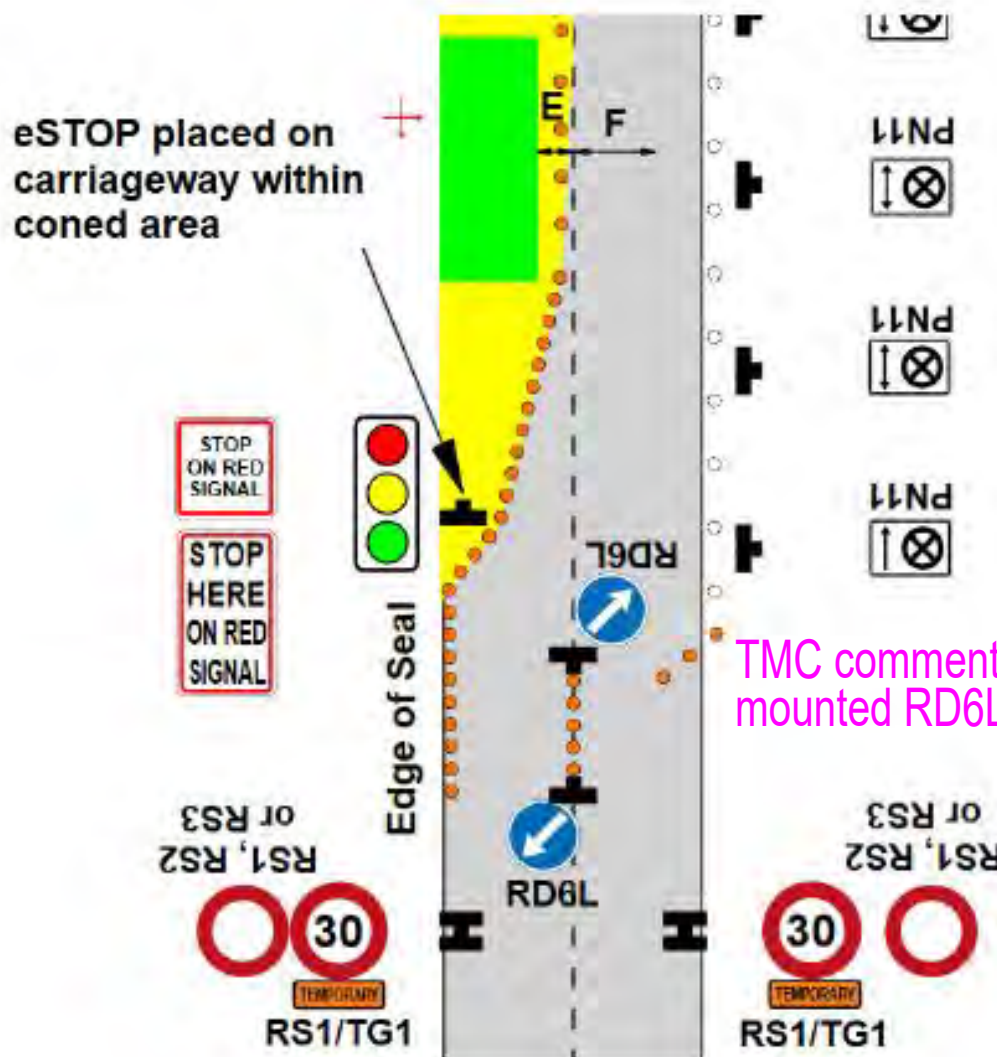

**APPROVED**  
Information Only  
This should be used with  
CAI ATMS01 or ATMS02  
Jason Wildman  
STMS Number 307 43  
Hutt City Council  
*Jason Wildman*  
18 December 2023


**Static operations**

**TWO-WAY TWO-LANE ROAD**  
**All traffic stopped temporarily**  
**Manual traffic control (STOP/GO or STOP/SLOW)**

**F2.15**  
**Level 1**

**Notes**

1. Closure period not to exceed the limit set or approved by the RCA
2. Extend advance warning signs towards on-coming traffic beyond any expected traffic queues
3. MTC with RP4/RP41 STOP/GO or RP4/RP42 STOP/SLOW paddle on road shoulder located between 1st and 2nd cone in the cone threshold closest to the working space
4. Minimum 5 cones in cone threshold at:
  - 2.5m centres - less than 65km/h
  - 5m centres - more than 65km/h
5. MTCs must show same message to oncoming traffic (eg STOP/STOP or GO/GO)
6. Refer to C10.2.3 MTC essentials for further information
7. When road users are passing the working space in alternating flow, all construction equipment must be stopped on same side of the road if there is no separation from the live lane
8. Where damage is likely to occur to passing traffic eg during sealing, traffic must be stopped in both directions
9. The T144 X0km/h AHEAD sign is optional

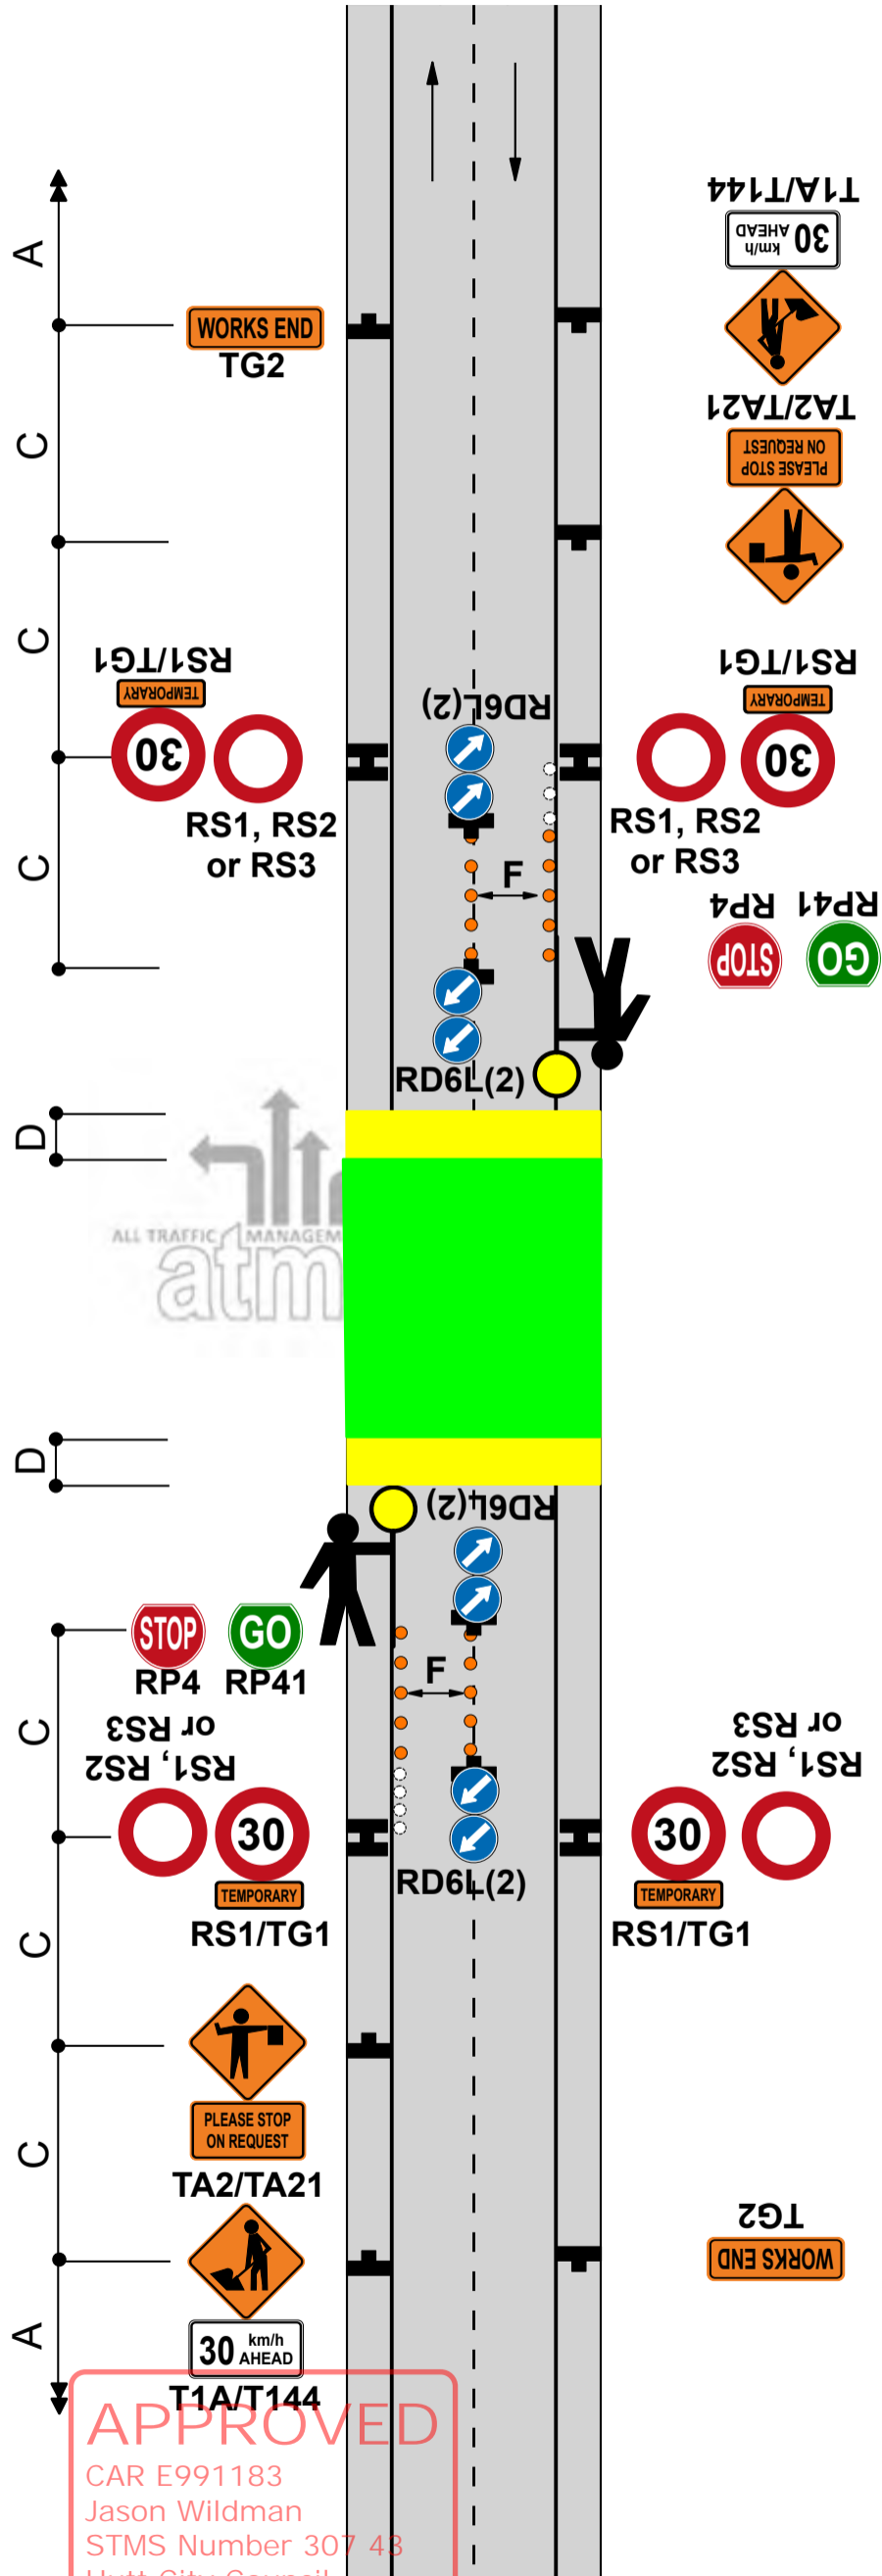

**APPROVED**  
 CAR E991183  
 Jason Wildman  
 STMS Number 307 43  
 Hutt City Council  
 18 December 2023

TMC comment - TMP does not allow for any unattended sites

**Static operations**


**TMC APPROVAL REQUIRED FOR BOTH ATTENDED AND UNATTENDED SITES**

**TWO-WAY TWO-LANE ROAD**  
 Single-lane (traffic volume less than 1000vpd - 80vph)  
 Give way control

**F2.16**  
**Level 1**

**Notes**

- The RP51/RP22 and RP52 controls must be placed in the following priority order:
  - downhill traffic must give way to uphill traffic
  - traffic that has to cross into the opposing lane gives way, however where visibility for this vehicle is marginal the contractor may require the other vehicle with better visibility to give way
- Intervisibility is required as indicated on diagram. This means that a vehicle at one sign is able to see whether the way ahead is clear
- A 30m return taper at the end of the closure is mandatory
- Use PN11 No Stopping signs, if necessary
- Cones are required on edge of the temporary lane opposite closure if road is not well defined
- The T144 X0km/h AHEAD sign is optional

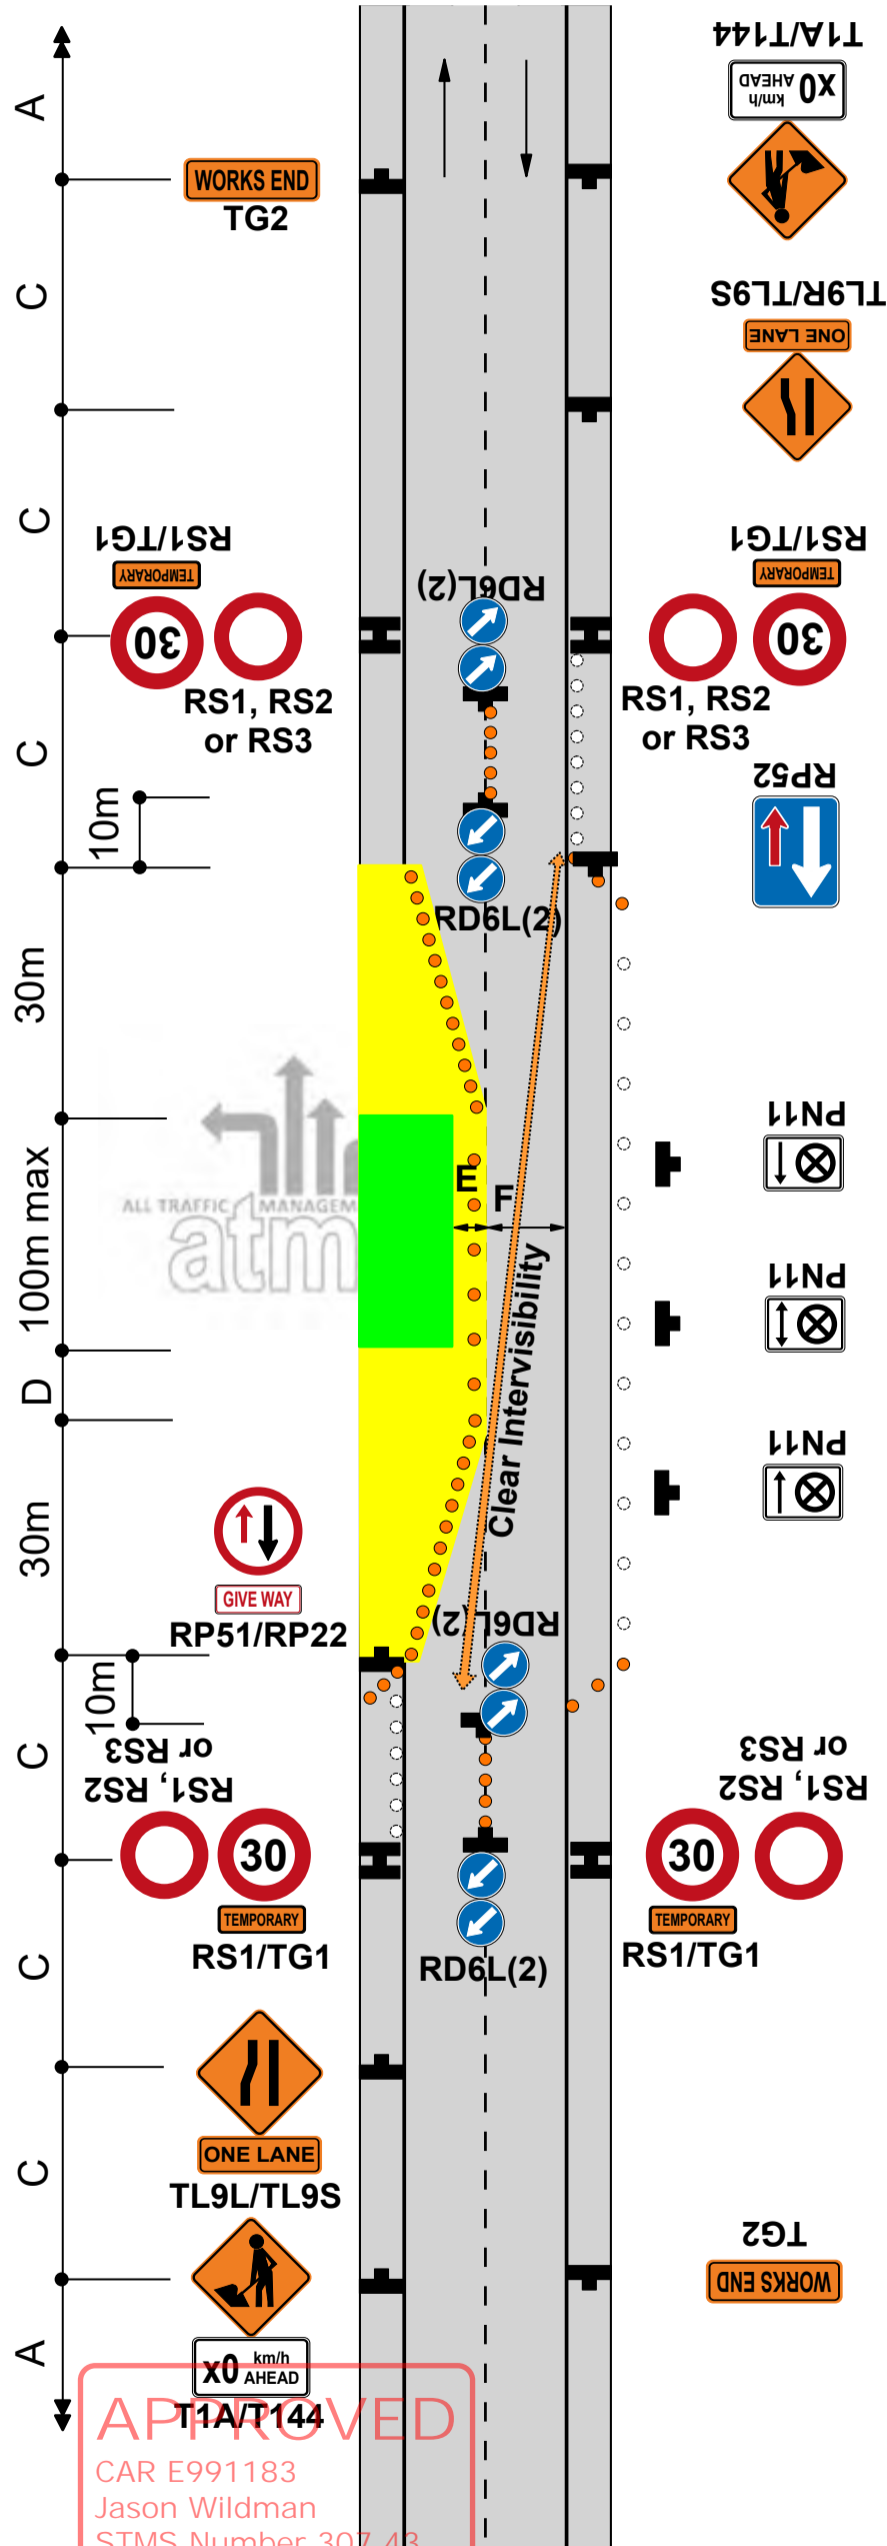

**APPROVED**  
 CAR E991183  
 Jason Wildman  
 STMS Number 307 43  
 Hutt City Council  
 18 December 2023

~~TMC APPROVAL REQUIRED FOR SENSORED TRAFFIC SIGNALS TO BE USED FOR ANY UNATTENDED PERIOD~~


**Static operations**

**TWO-WAY TWO-LANE ROAD**  
**Single-lane alternating flow**  
**Portable traffic signals**

**F2.17**  
**Level 1**

**Notes**

1. Provide details of make and model of portable traffic signals in the TMP
2. Install temporary limit lines (must be able to be removed upon completion) or use RP61/RP62 signs
3. Approved temporary speed humps may also be used. Consider use of MTC while speed humps are installed
4. A 30m return taper at the end of the closure is mandatory
5. Cones are required on edge of the temporary lane opposite closure if road is not well defined
6. Extend or place extra advance warning signs towards on-coming traffic beyond any expected traffic queues
7. Use PN11 No Stopping signs, if necessary
8. Minimum 5 cones in cone threshold at:
  - 2.5m centres - less than 65km/h
  - 5m centres - more than 65km/h
9. The T144 30km/h AHEAD sign is optional

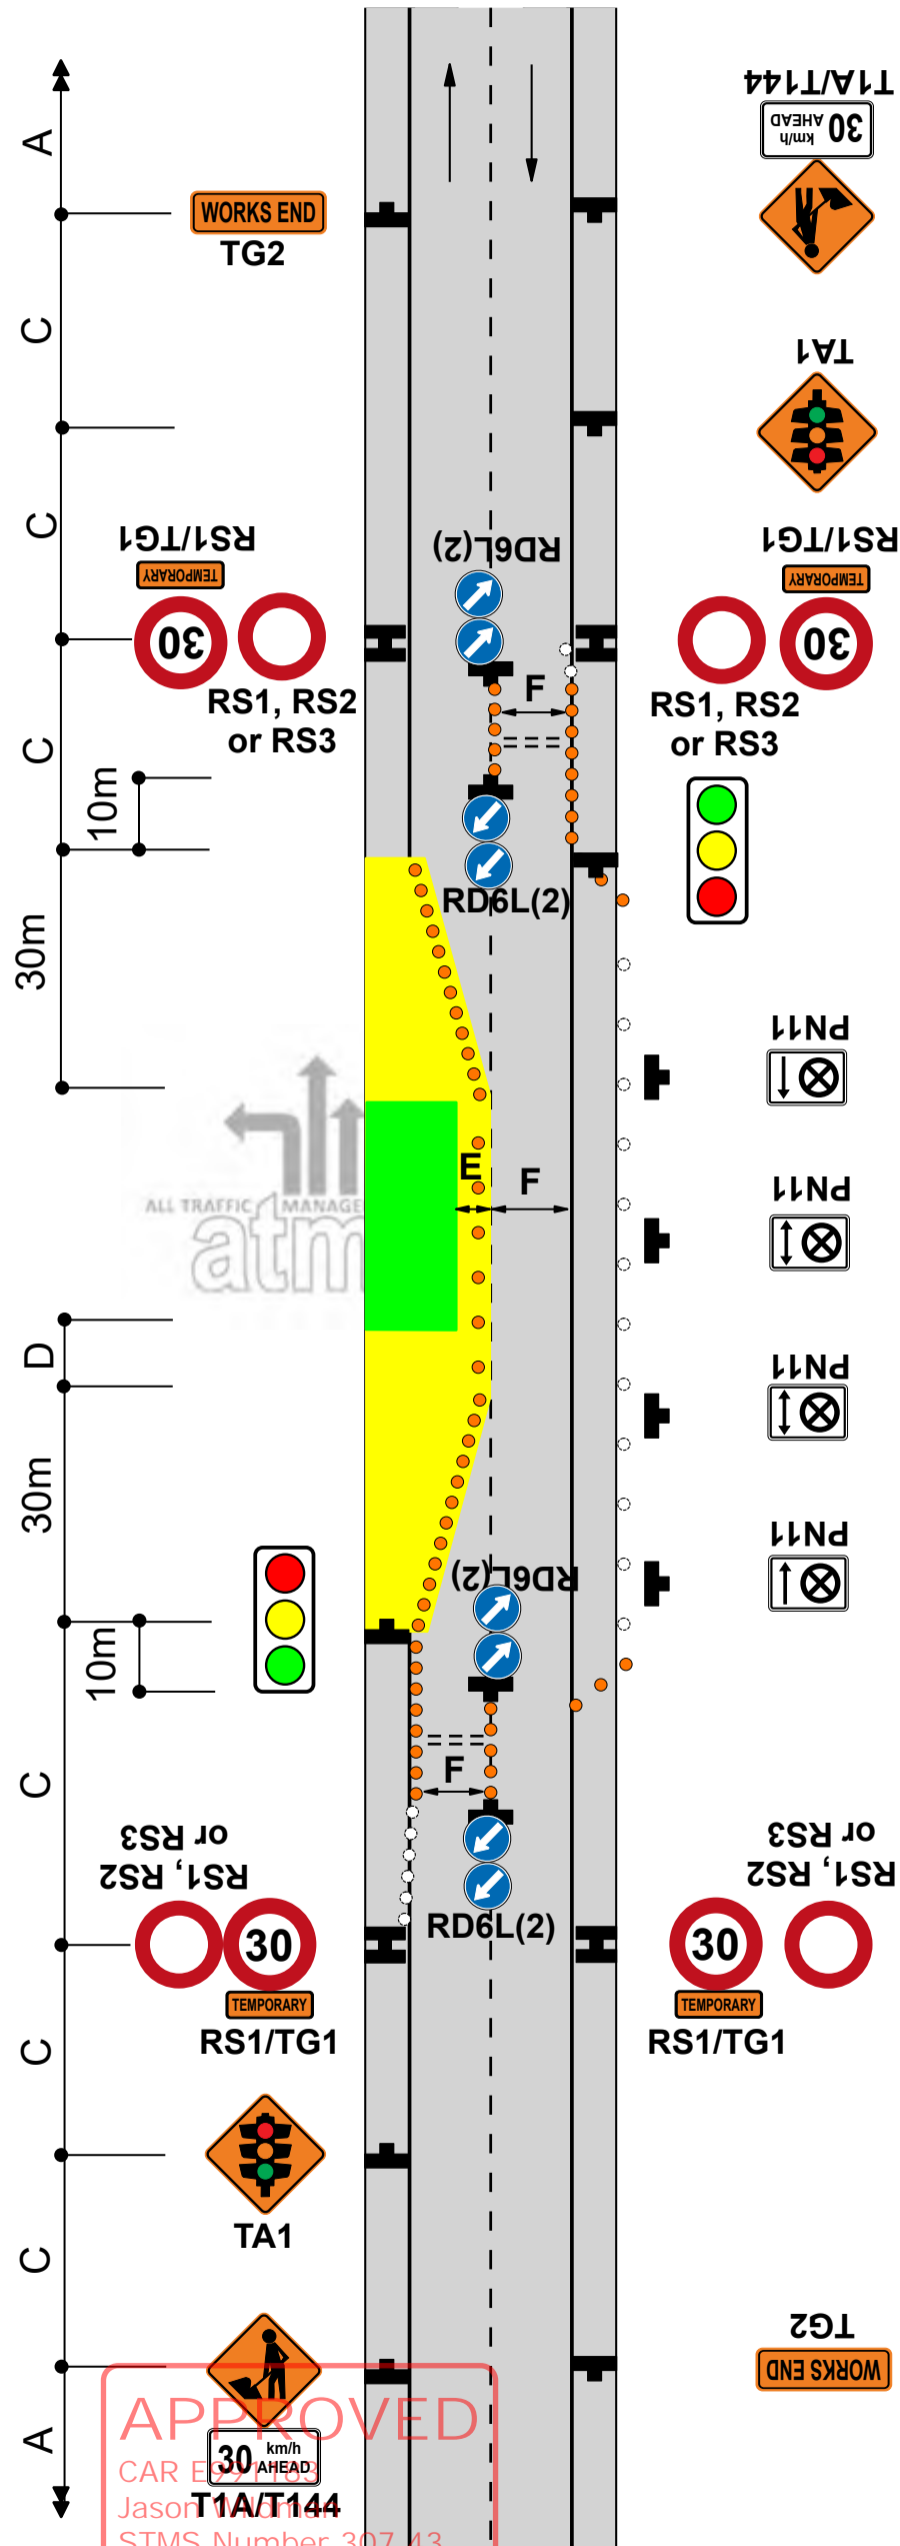

**APPROVED**  
 CAR ENGINEER  
 Jason T1A/T144  
 STMS Number 307 43  
 Hutt City Council  
 18 December 2023


**Static operations**

**TWO-WAY TWO-LANE ROAD  
Work in centre of road**

**F2.18  
Level 1**

**Notes**

1. Cones are required on edge of the temporary lane opposite closure if road is not well defined
2. \*Calculation of taper length for lateral shift of less than 3.5m is:  
 $W \times G$   
 3.5  
 W = Width of lateral shift  
 G = Taper length in metres from the level 1 layout distance table
3. Use PN11 no stopping signs, if necessary
4. Use TSLs if required by TSL decision matrix
5. The T144 X0km/h AHEAD sign is optional

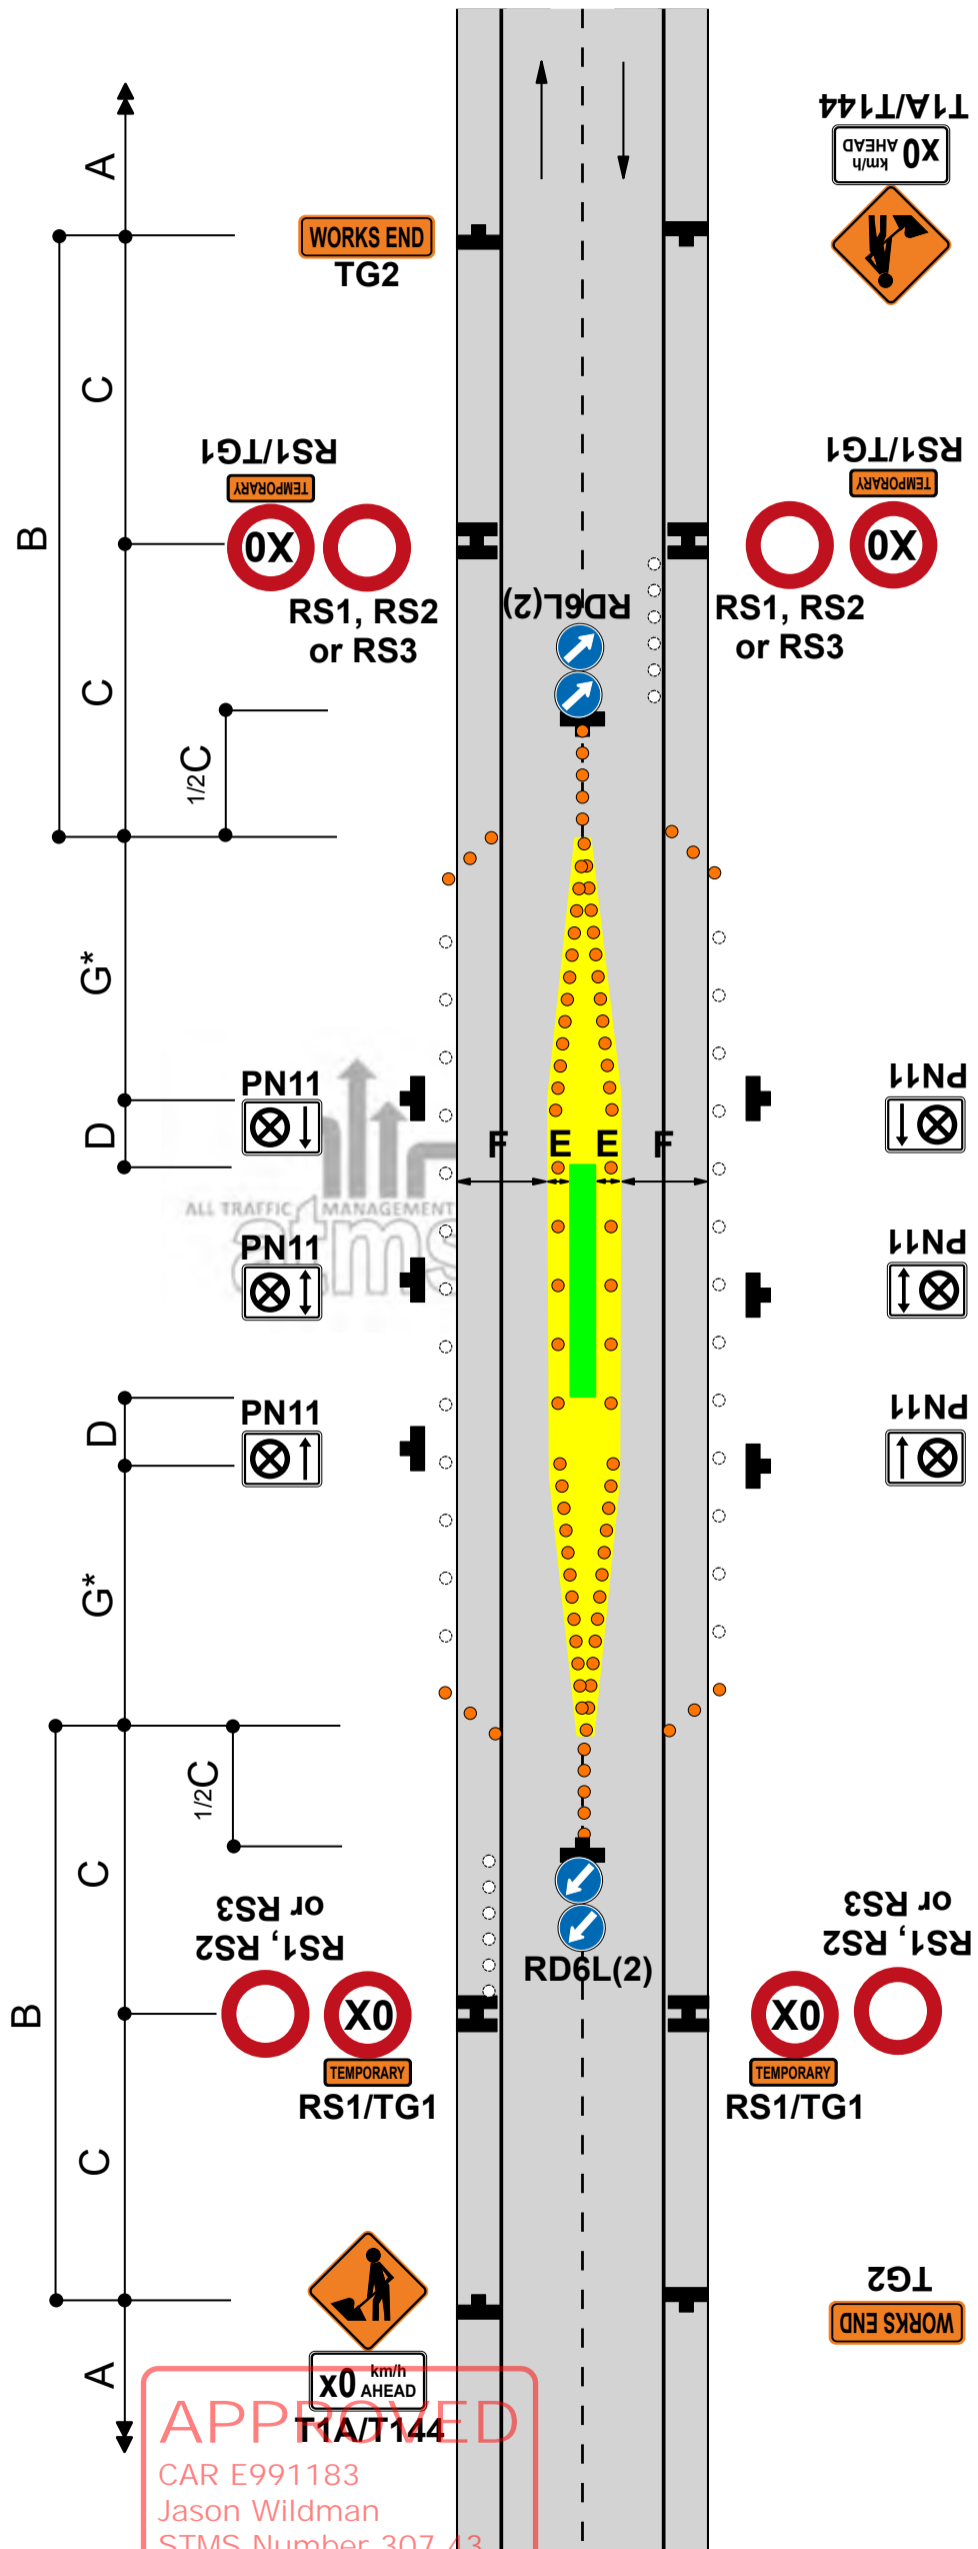

APPROVED

CAR E991183  
 Jason Wildman  
 STMS Number 307 43  
 Hutt City Council


Wildman

18 December 2023

**Static operations**

**TWO-WAY TWO-LANE ROAD - Intersection or roundabout**  
**Road works on side road after intersection - TSL on side road**  
**Traffic not crossing road centre**

**F2.19**  
**Level 1**

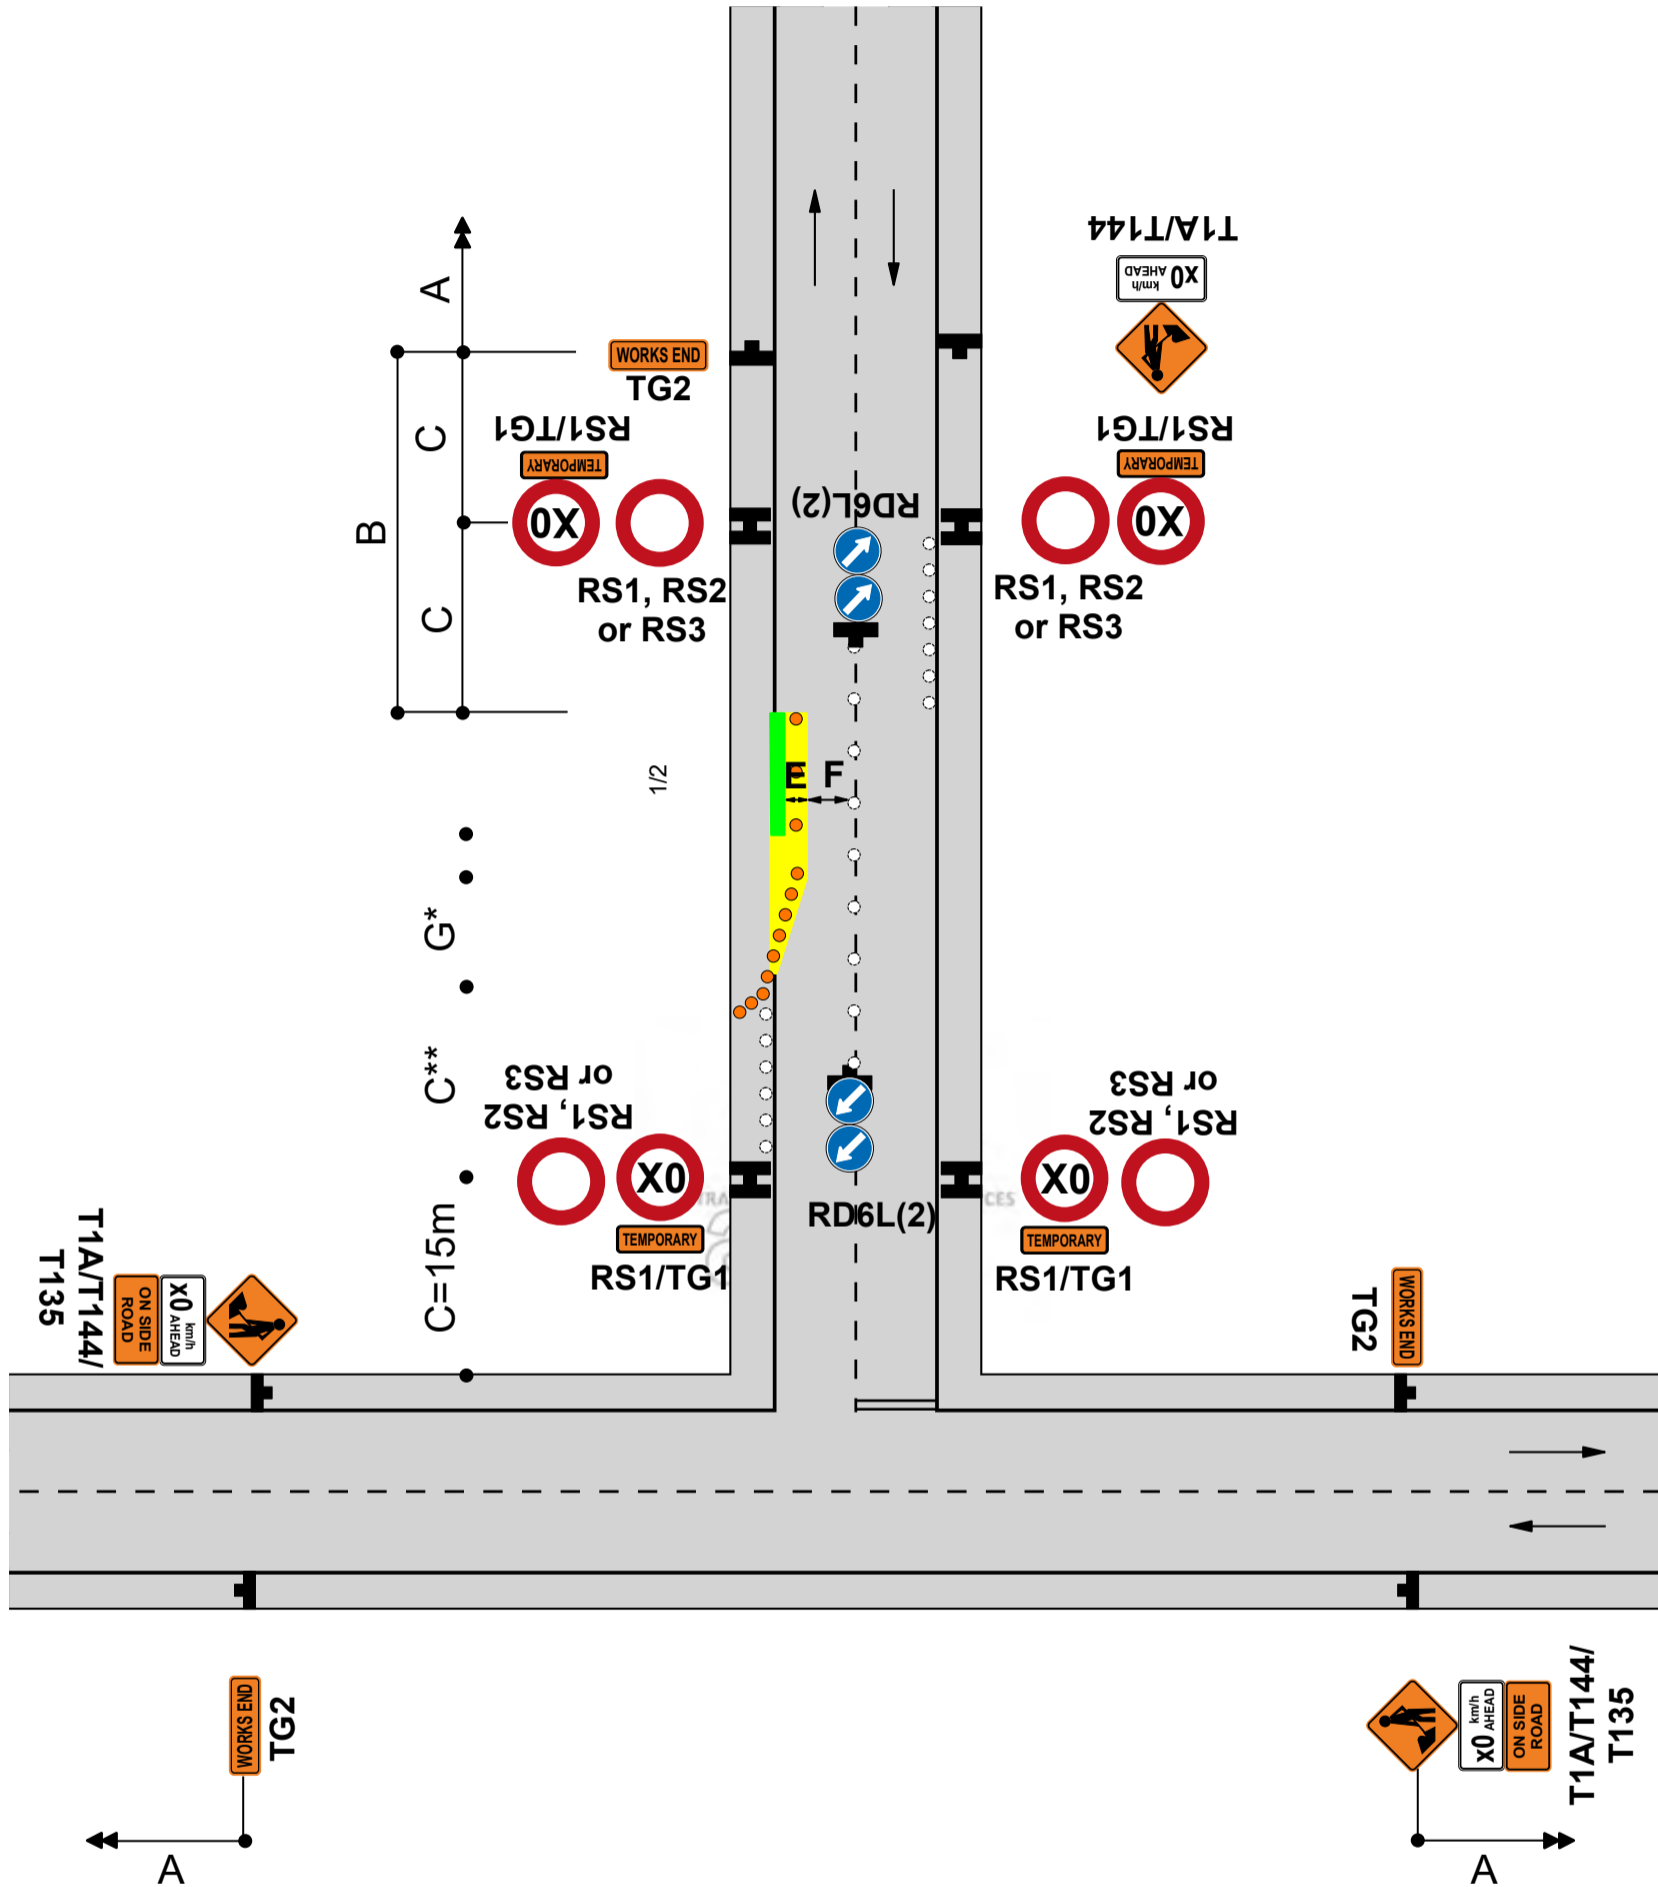

**Notes**

1. Sign spacing of TSL at the intersection can be reduced as per the table shown below
2. Where minimum dimensions cannot be achieved TMD F2.20 is to be used
3. Advance warning signs on main road must be at least the warning distance away from first cone in taper
4. \*Calculation of taper length for lateral shift of less than 3.5m is:  
 $W \times G \ W =$  Width of lateral shift  
 $3.5 \ G =$  Taper length in metres from the level 1 layout distance table
5. If traffic likely to cross the centreline, place cones on the centreline with RD6L signs at each end
6. Use TSLs as required by TSL decision matrix
7. The T144 30km/h AHEAD sign is optional


Speed (PSL)	Intersection to TSL	TSL to taper	Total
<50km/h	15m	15m	30m
60km/h	15m	25m	40m
>70km/h	15m	40m	55m

**APPROVED**  
 CAR E991183  
 Jason Wildman  
 STMS Number 307 43  
 Hutt City Council  
 18 December 2023

**Static operations**

**TWO-WAY TWO-LANE ROAD - Intersection or roundabout**  
**Road works on side road after intersection - TSL on main road**  
**Traffic not crossing road centre**

**F2.20**  
**Level 1**

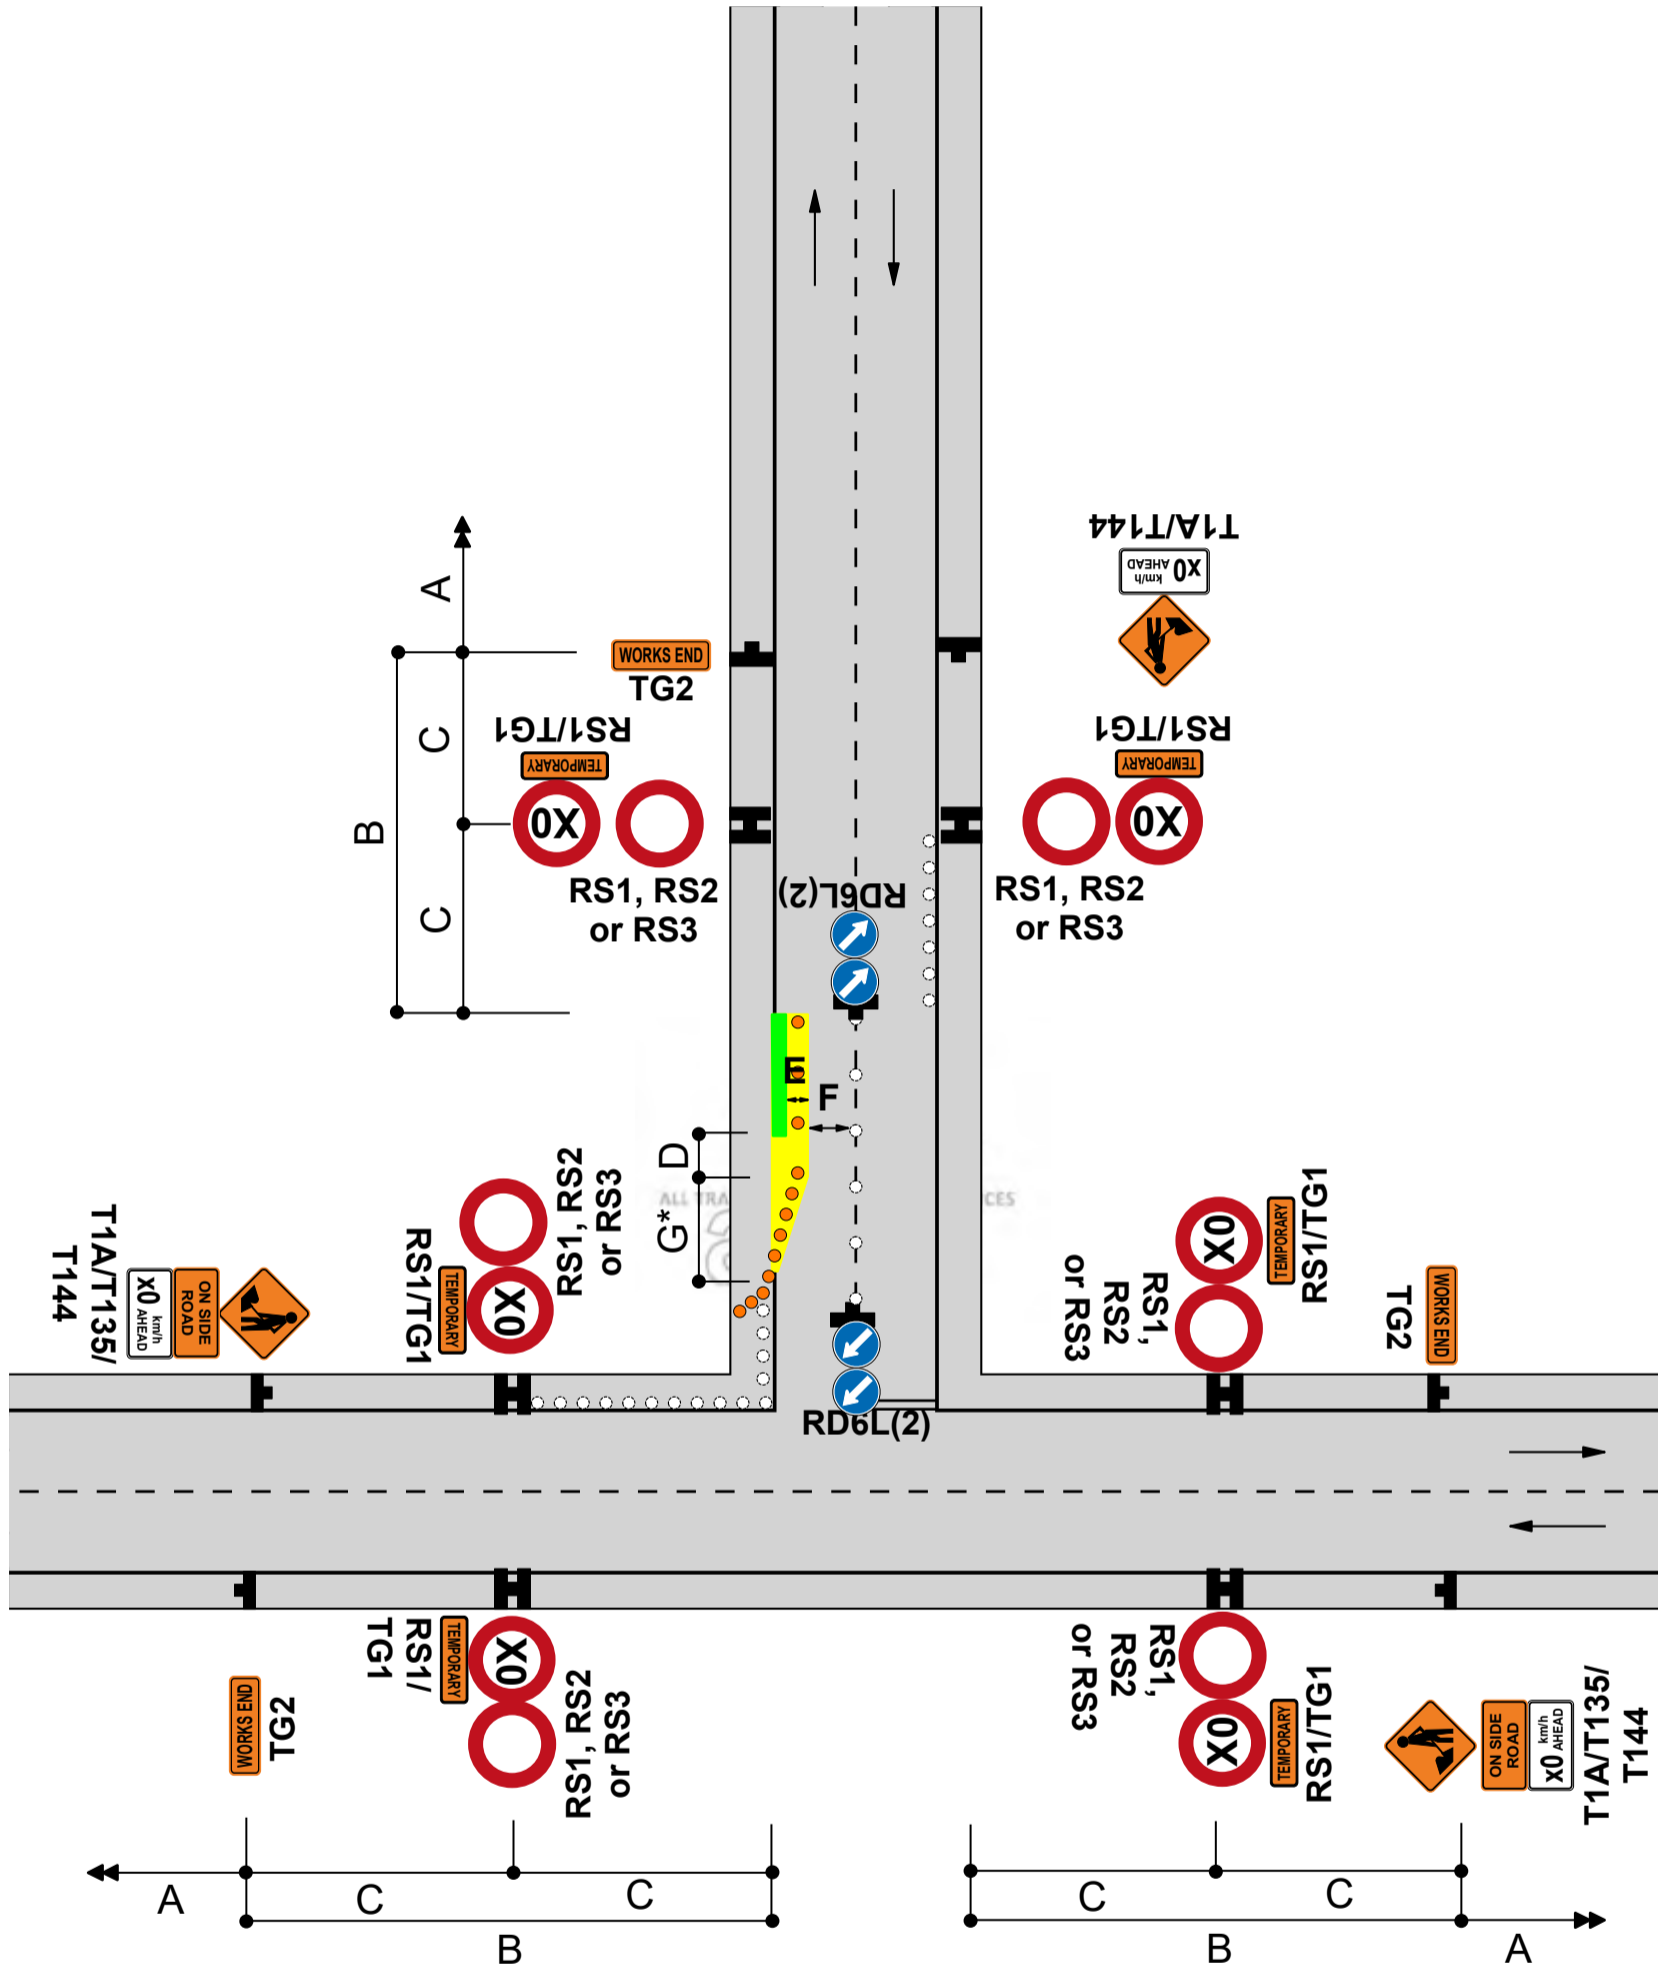

**Notes**

- \*Calculation of taper length for lateral shift of less than 3.5m is:  
 $W \times G$      $W$  = Width of lateral shift  
 3.5         $G$  = Taper length in metres from the level 1 layout distance table
- If traffic likely to cross the centreline, place cones on the centreline with RD6L signs at each end
- Use TSLs as required by TSL decision matrix
- The T144 X0km/h AHEAD sign is optional


**APPROVED**  
 CAR E991183  
 Jason Wildman  
 STMS Number 307 43  
 Hutt City Council  
  
 18 December 2023



**Static operations**

**TWO-WAY TWO-LANE ROAD - Intersection or roundabout**  
**Work in middle of intersection**

**F2.21**  
**Level 1**

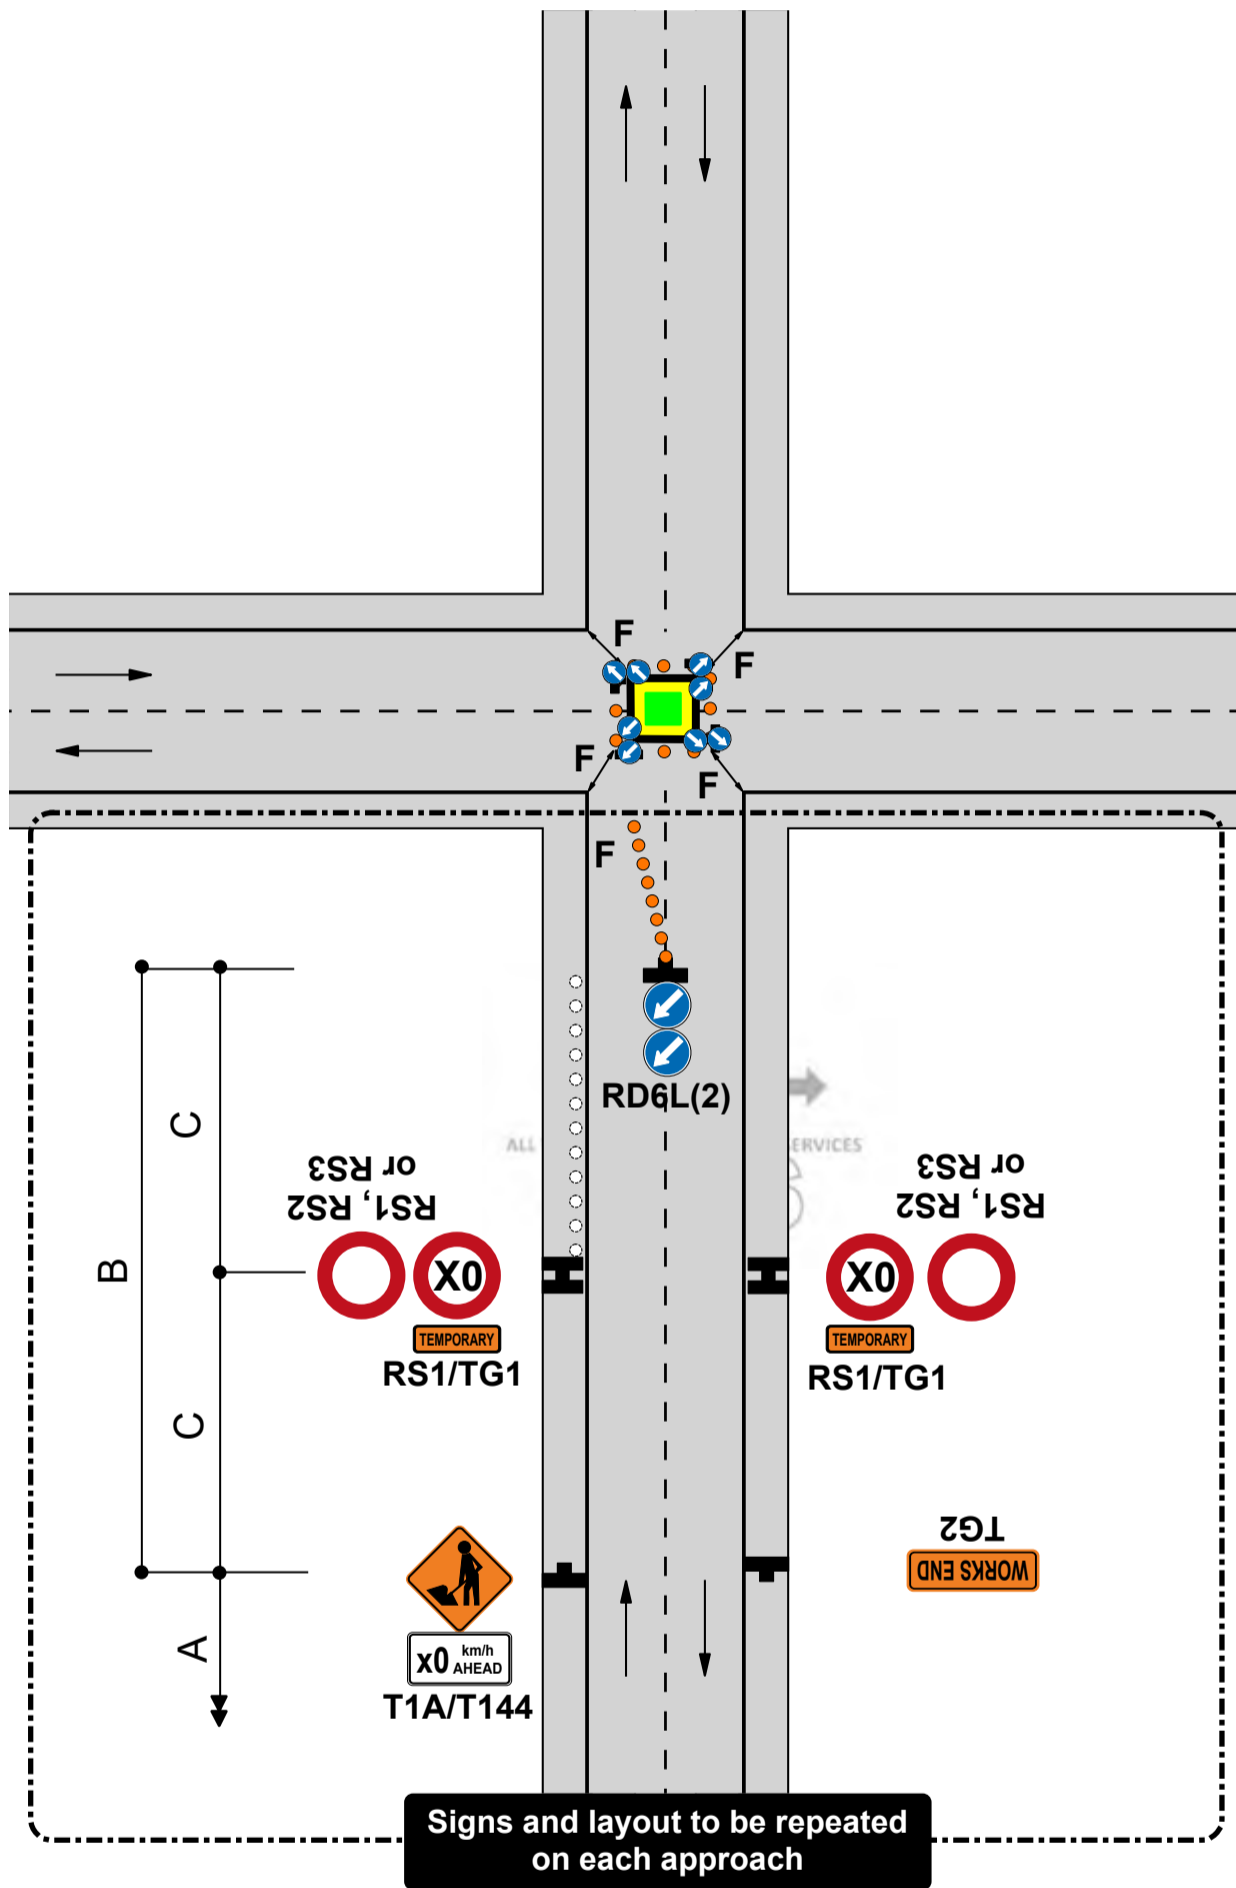

**Notes**

1. This diagram may be used at a T intersection by removing any one of the roads
2. Signs and layout shown in the box at the bottom of the diagram is to be repeated on each approach
3. RD6L signs are not required at an existing roundabout
4. Cone tapers are optional at existing roundabouts
5. Lane widths, F, may need to be increased to allow for turning movements of larger vehicles
6. Use TSLs if required by TSL decision matrix
7. The T144 X0km/h AHEAD sign is optional

**APPROVED**  
 CAR E991183  
 Jason Wildman  
 STMS Number 307 43  
 Hutt City Council  
 Section F  
*Wildman*


Static operations

ONE-WAY TWO-LANE DIVIDED OR TWO-LANE ROAD  
Left-lane closure

F2.30  
Level 1

Notes

- 1. Use TSLs if required by TSL decision matrix
- 2. On roads with a permanent speed limit of 100km/h, cones are required from the TSL to the taper if the speed is reduced by more than 30km/h
- 3. The T144 X0km/h AHEAD sign is optional

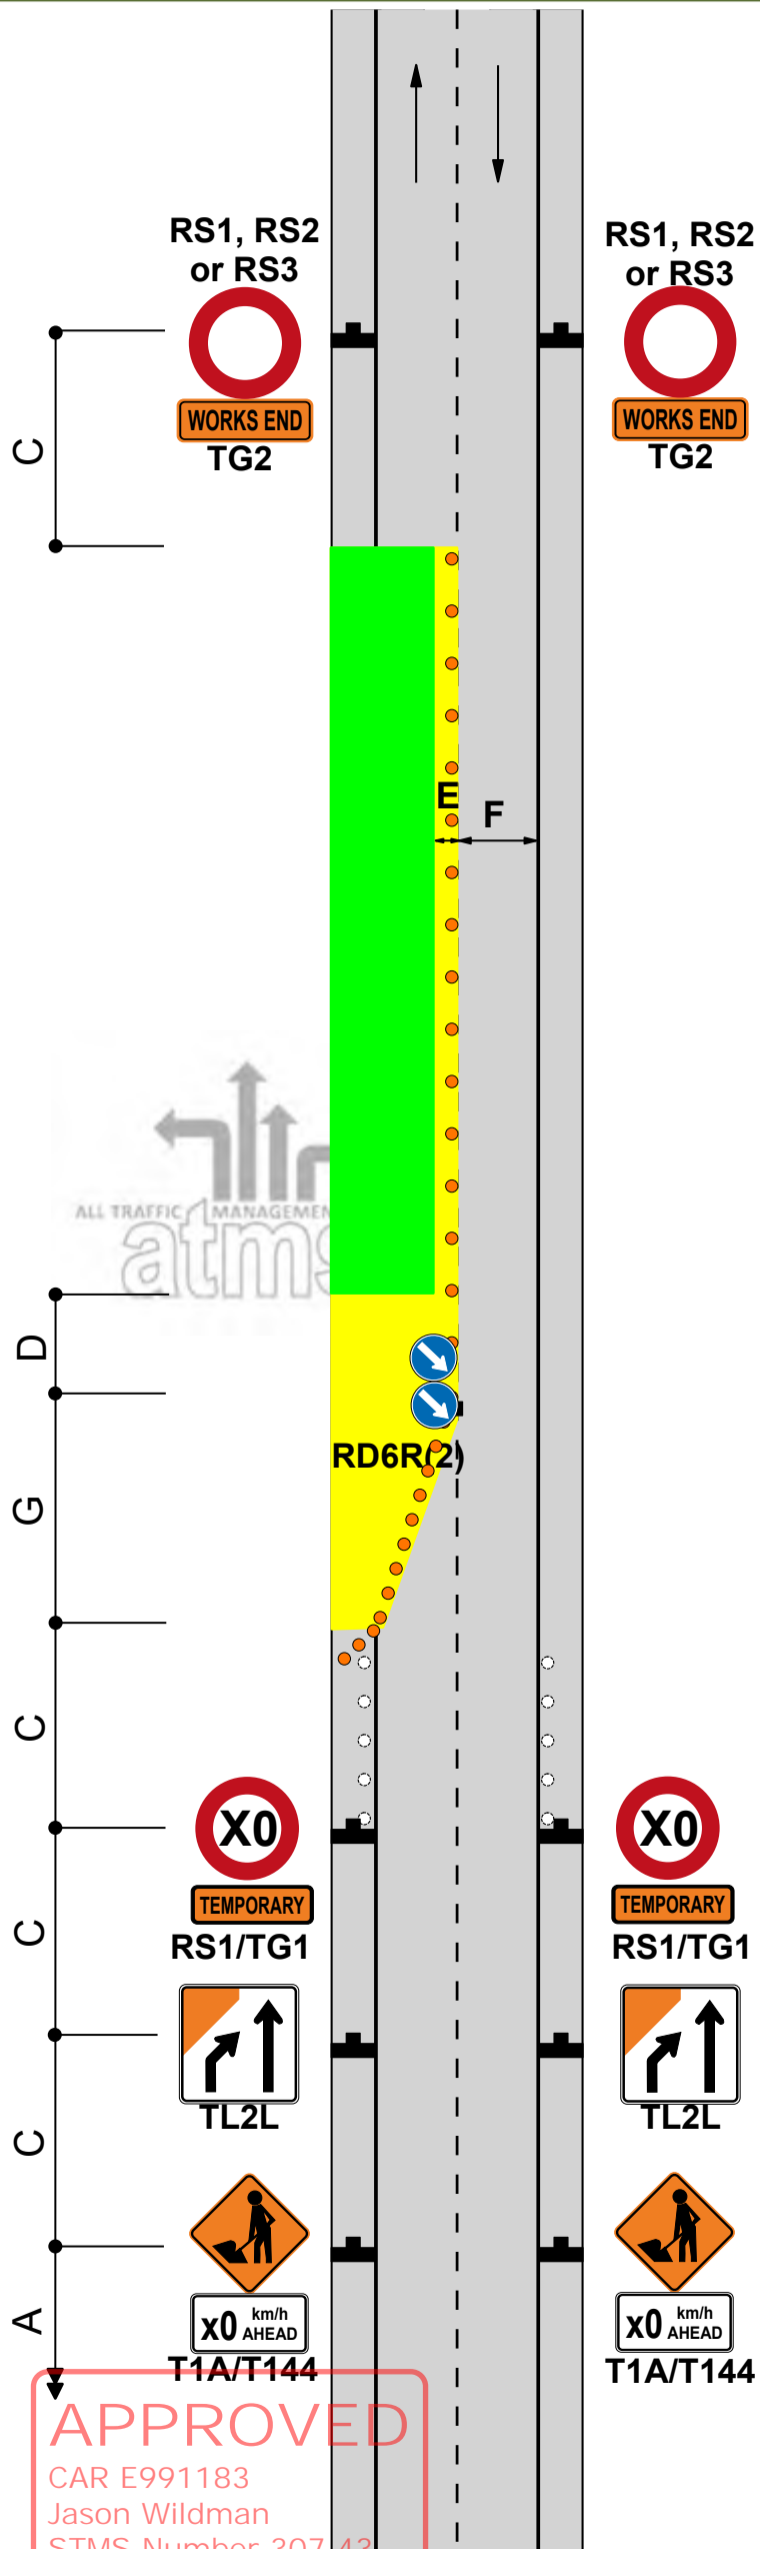

APPROVED  
 CAR E991183  
 Jason Wildman  
 STMS Number 30743  
 Hutt City Council  
 18 December 2023


Static operations

ONE-WAY TWO-LANE DIVIDED OR TWO-LANE ROAD  
Right-lane closure

F2.31  
Level 1

Notes

- 1. Use TSLs if required by TSL decision matrix
- 2. On roads with a permanent speed limit of 100km/h, cones are required from the TSL to the taper if the speed is reduced by more than 30km/h
- 3. The T144 X0km/h AHEAD sign is optional

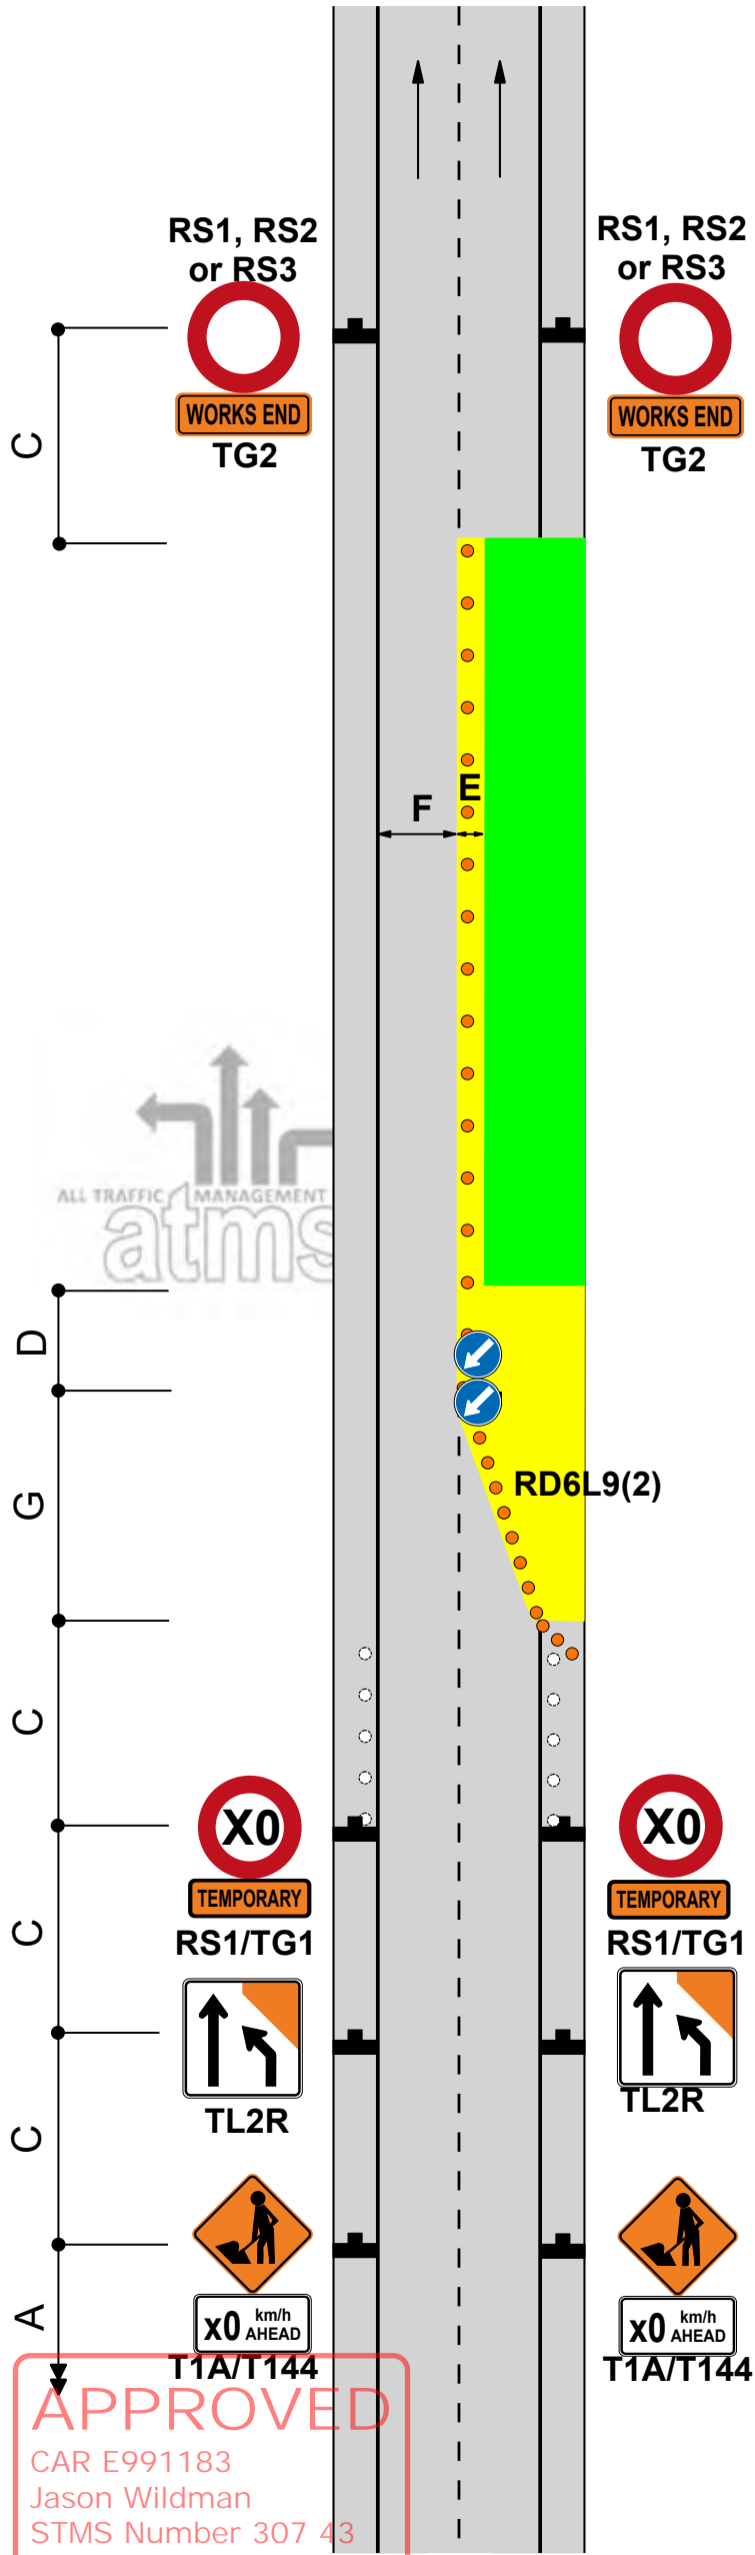

APPROVED

CAR E991183  
Jason Wildman  
STMS Number 307 43  
Hutt City Council

*Wildman*  
18 December 2023

# CC8 - Valve towards left of the lane

<p>Mobile operations</p> <p>TWO-WAY TWO-LANE ROAD</p> <p>Personnel on the road - Valve towards left of the lane</p> <p>50km/h or less</p>		<p><b>CC8</b></p> <p>Level 1</p>
<p>Notes</p> <ol style="list-style-type: none"> <li>1. The vehicle must be able to be driven with a Class 1 drivers license</li> <li>2. There must be clear sight distance to the vehicle of at least 75m. This means that this operation cannot be completed within 75m of a corner or the brow of a hill</li> <li>3. Worker to exit and enter the vehicle when there is a gap in traffic</li> <li>4. The worker must not work within 10m of the vehicle (10m roll ahead)</li> <li>5. The worker cannot be behind the vehicle unprotected in the live lane</li> </ol>		

**APPROVED**  
 CAR E991183  
 Jason Wildman  
 STMS Number 307 43  
  
 18 December 2023

# CC9 - Valve towards right of the lane

Mobile operations	
TWO-WAY TWO-LANE ROAD Personnel on the road - Valve towards right of the lane 50km/h or less	
CC9 Level 1	
<p>Notes</p> <ol style="list-style-type: none"> <li>1. The vehicle must be able to be driven with a Class 1 drivers license</li> <li>2. There must be clear sight distance to the vehicle of at least 75m. This means that this operation cannot be completed within 75m of a corner or the brow of a hill</li> <li>3. Worker to exit and enter the vehicle when there is a gap in traffic</li> <li>4. The worker must not work within 10m of the vehicle (10m roll ahead)</li> <li>5. The worker cannot be behind the vehicle unprotected in the live lane</li> <li>6. TG2 WORKS END sign has been omitted for this mobile operation as end of works notification is achieved when road users can no longer see the flashing amber beacons</li> </ol>	

APPROVED

CAR E991183  
Jason Wildman

STMS Number 307243

Htt City District

18 December 2023

18 December 2023

# CC10 - Valve in centre of carriageway

Mobile operations


TWO-WAY TWO-LANE ROAD

Personnel on the road - Valve in centre of carriageway  
50km/h or less

CC10  
Level 1

Notes

1. The vehicle must be able to be driven with a Class 1 drivers license
2. There must be clear sight distance to each vehicle of at least 75m. This means that this operation cannot be completed within 75m of a corner or the brow of a hill
3. Worker to exit and enter the vehicle when there is a gap in traffic
4. The worker must not work within 10m of either of the vehicles (10m roll ahead)
5. The worker cannot be behind the rear vehicle unprotected in the live lane
6. TG2 WORKS END sign has been omitted for this mobile operation as end of works notification is achieved when road users can no longer see the flashing amber beacons

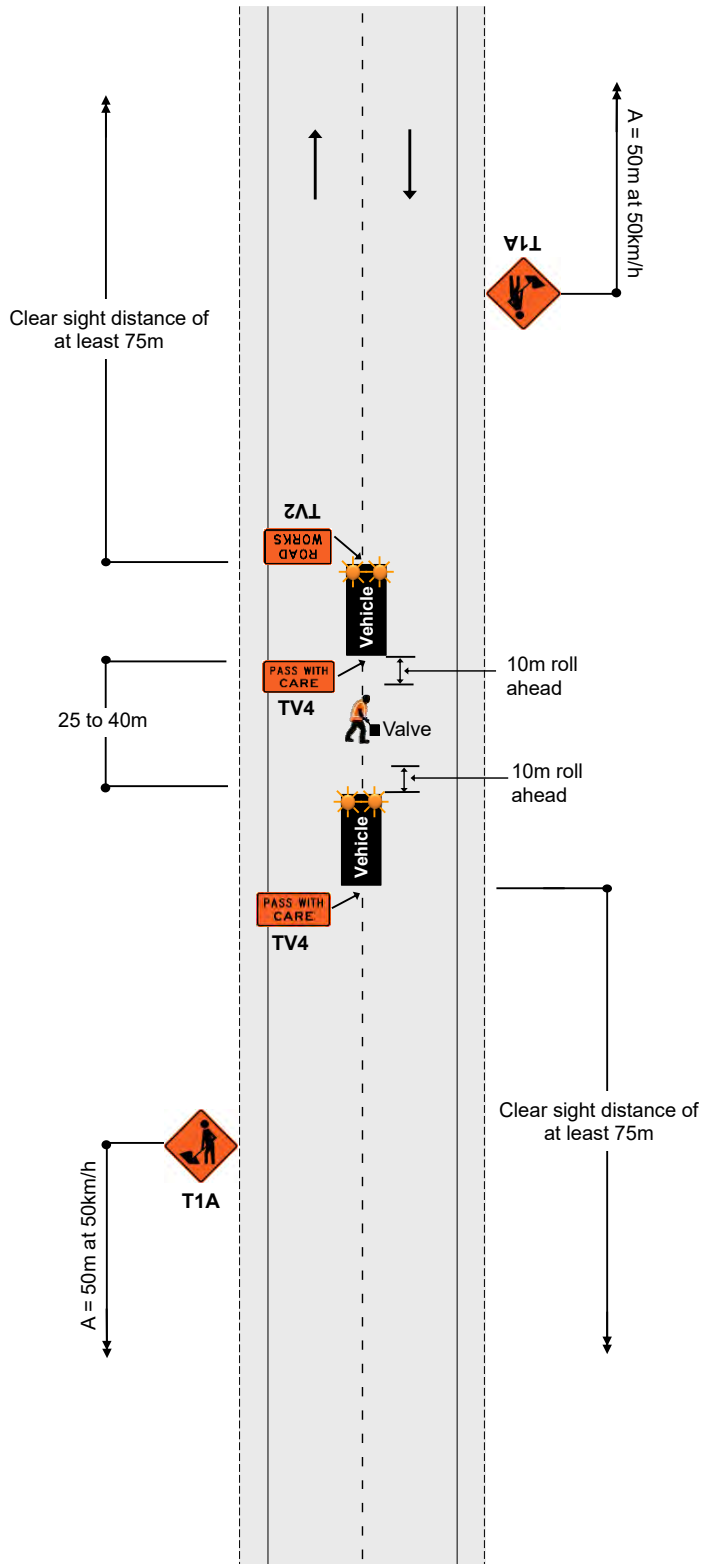

APPROVED

CAR E991183  
Jason Wildman  
STMS Number 307.43

18 December 2023

*Jason Wildman*

18 December 2023


# CC11 - Valve in centre of intersection

Mobile operations

TWO-WAY TWO-LANE ROAD

Personnel on the road - Valve in centre of intersection  
50km/h or less

CC11  
Level 1

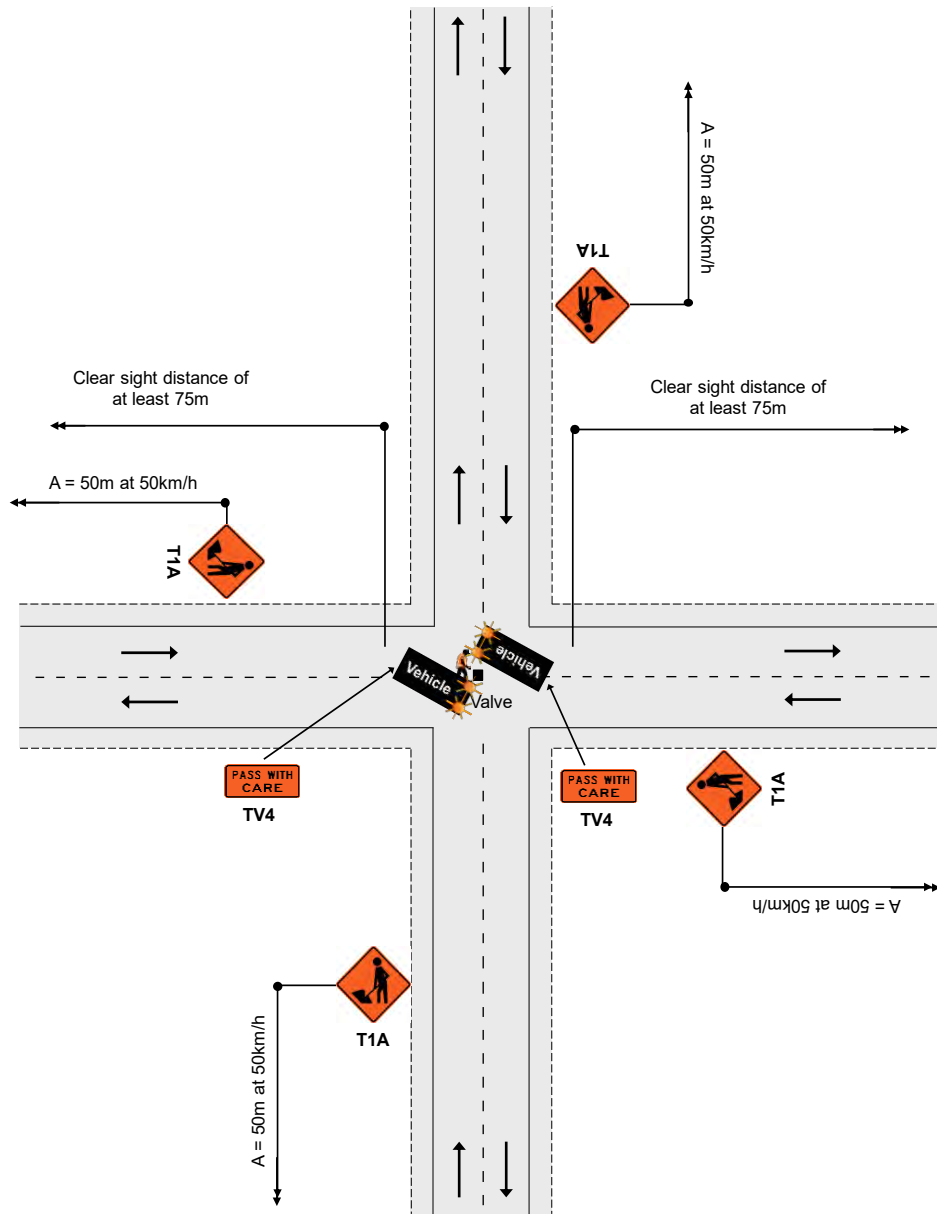

Notes

1. The vehicles must be able to be driven with a Class 1 drivers license
2. There must be clear sight distance to each vehicle of at least 75m. This means that this operation cannot be completed within 75m of a corner or the brow of a hill
3. Worker to exit and enter the vehicle when there is a gap in traffic
4. The worker cannot be behind the rear vehicle unprotected in the live lane
5. TG2 WORKS END sign has been omitted for this mobile operation as end of works notification is achieved when road users can no longer see the flashing amber beacons

APPROVED

CAR F991183  
Jason Wildman  
STMS Number 307 43

18 December 2023

*Jason Wildman*

18 December 2023

# CC12 - Less than 75m CSD

Mobile operations


TWO-WAY TWO-LANE ROAD  
Less than 75m CSD  
50km/h or less

CC12

Level 1

Notes

1. Where a valve needs to be turned off where there is less than 75m clear sight distance in both directions (eg crest of a hill, on a corner or at a roundabout) then extend the shut off by turning off the nearest valve where 75m clear visibility can be achieved
2. If 50 houses or less are impacted by this extended shut off, then continue with the work activity
3. If more than 50 houses are impacted by this extended shut off, then get the TTM contractor to install TTM to enable the initial valve to be turned off/on safely

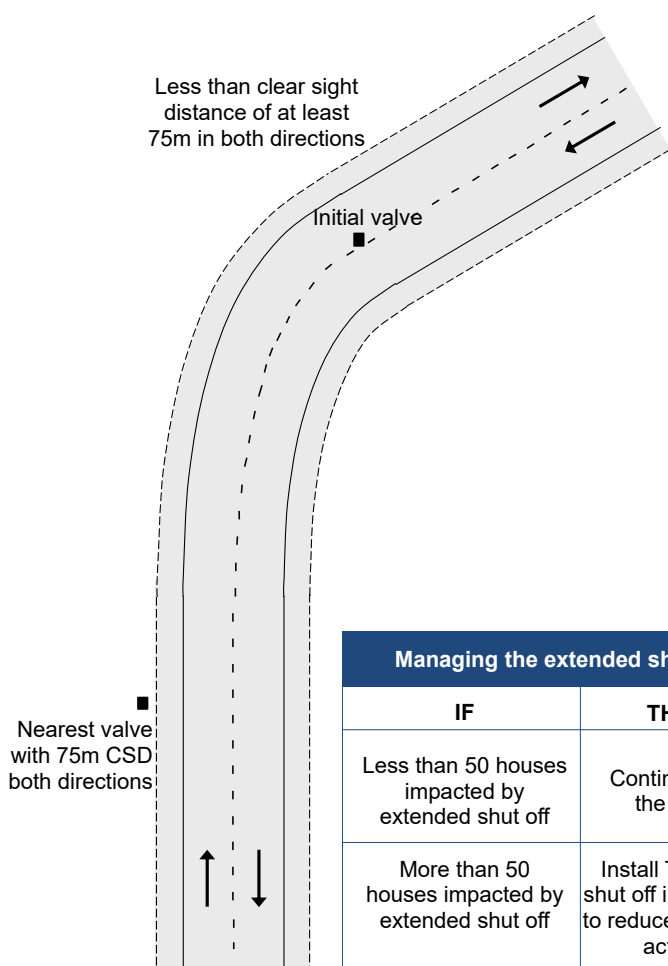

Managing the extended shut off	
IF	THEN
Less than 50 houses impacted by extended shut off	Continue with the work
More than 50 houses impacted by extended shut off	Install TTM and shut off initial valve to reduce impact of activity

APPROVED

CAR E991183  
Jason Wildman  
STMS Number 307 43

Hutt City Council


*Wildman*

18 December 2023



TWO-WAY TWO-LANE ROAD  
Work vehicle is more than five (5) metres from the edgeline  
Any speed

F4.1  
Level 1

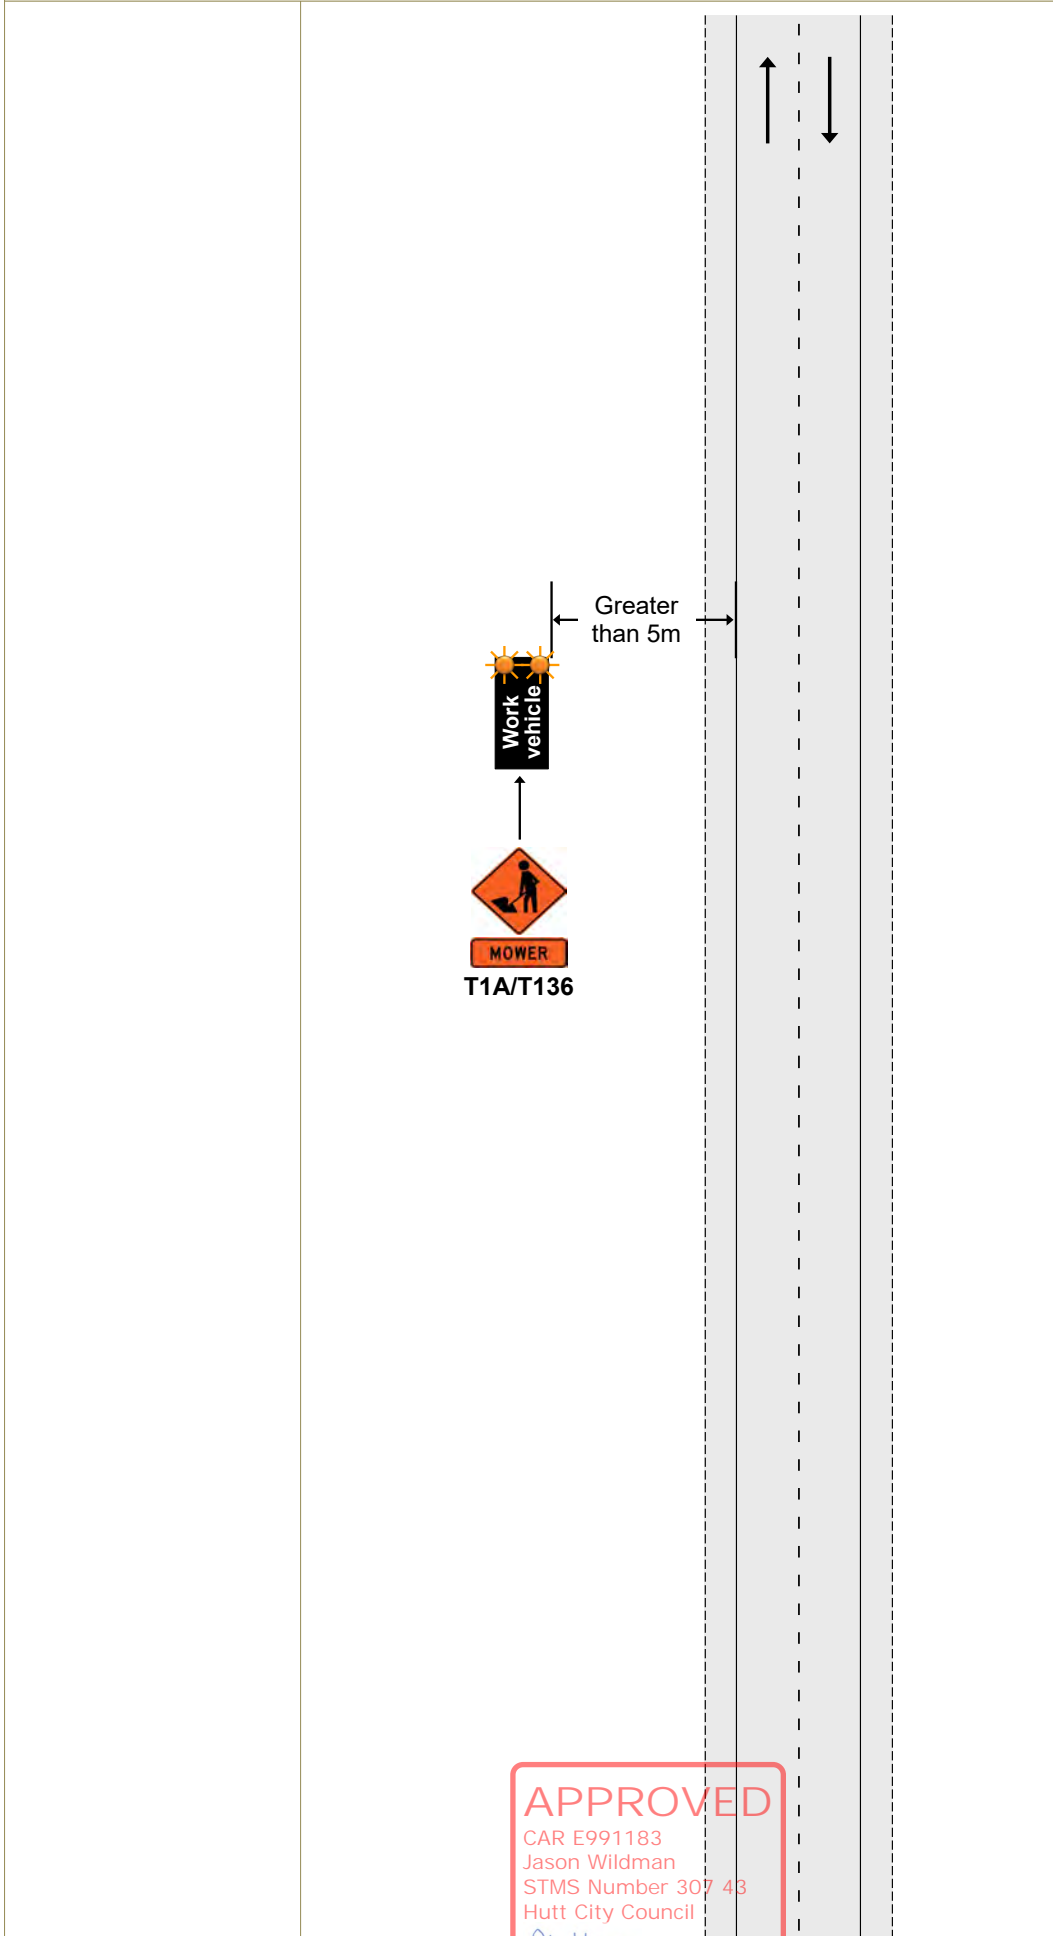

**APPROVED**  
CAR E991183  
Jason Wildman  
STMS Number 307 43  
Hutt City Council  
*Jason Wildman*  
18 December 2022

Mobile operations

TWO-WAY TWO-LANE ROAD


Work vehicle is within five (5) metres of the edgeline

CSD to work vehicle - not required under 65km/h, required over 65km/h

F4.2  
Level 1

Notes

- 1.If permanent speed is under 65km/h, rear visibility to the work vehicle is not required
- 2.If permanent speed is over 65km/h, rear visibility to the work vehicle is required
- 3.A tail pilot vehicle equipped with T1A advance warning sign, appropriate supplementary plate and RD6R may replace the static signs if the permanent speed is under 65km/h (see TMD F4.3)

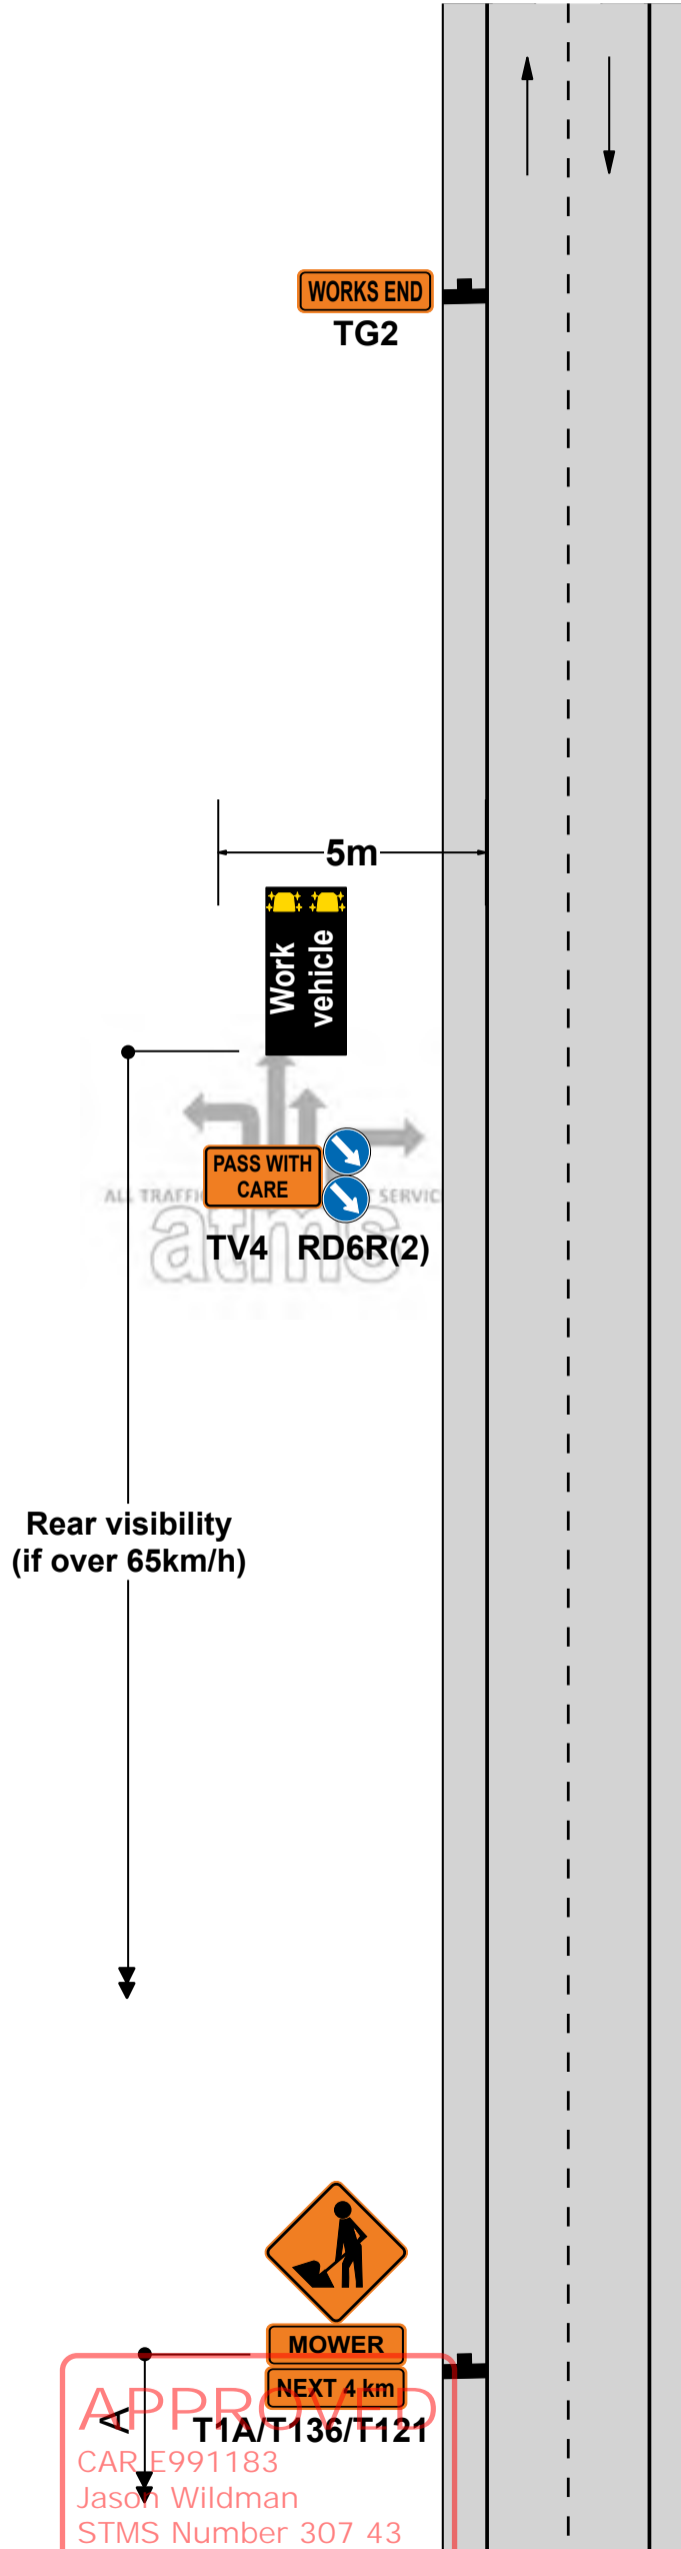

Mobile operations

TWO-WAY TWO-LANE ROAD


Work vehicle is within five (5) metres of the edgeline

Speed limit over 65km/h - the rear visibility is less than CSD

F4.3  
Level 1

Notes

- 1. This TMD can replace TMD F4.2 when permanent speed is under 65km/h. In these situations, static signs are not required

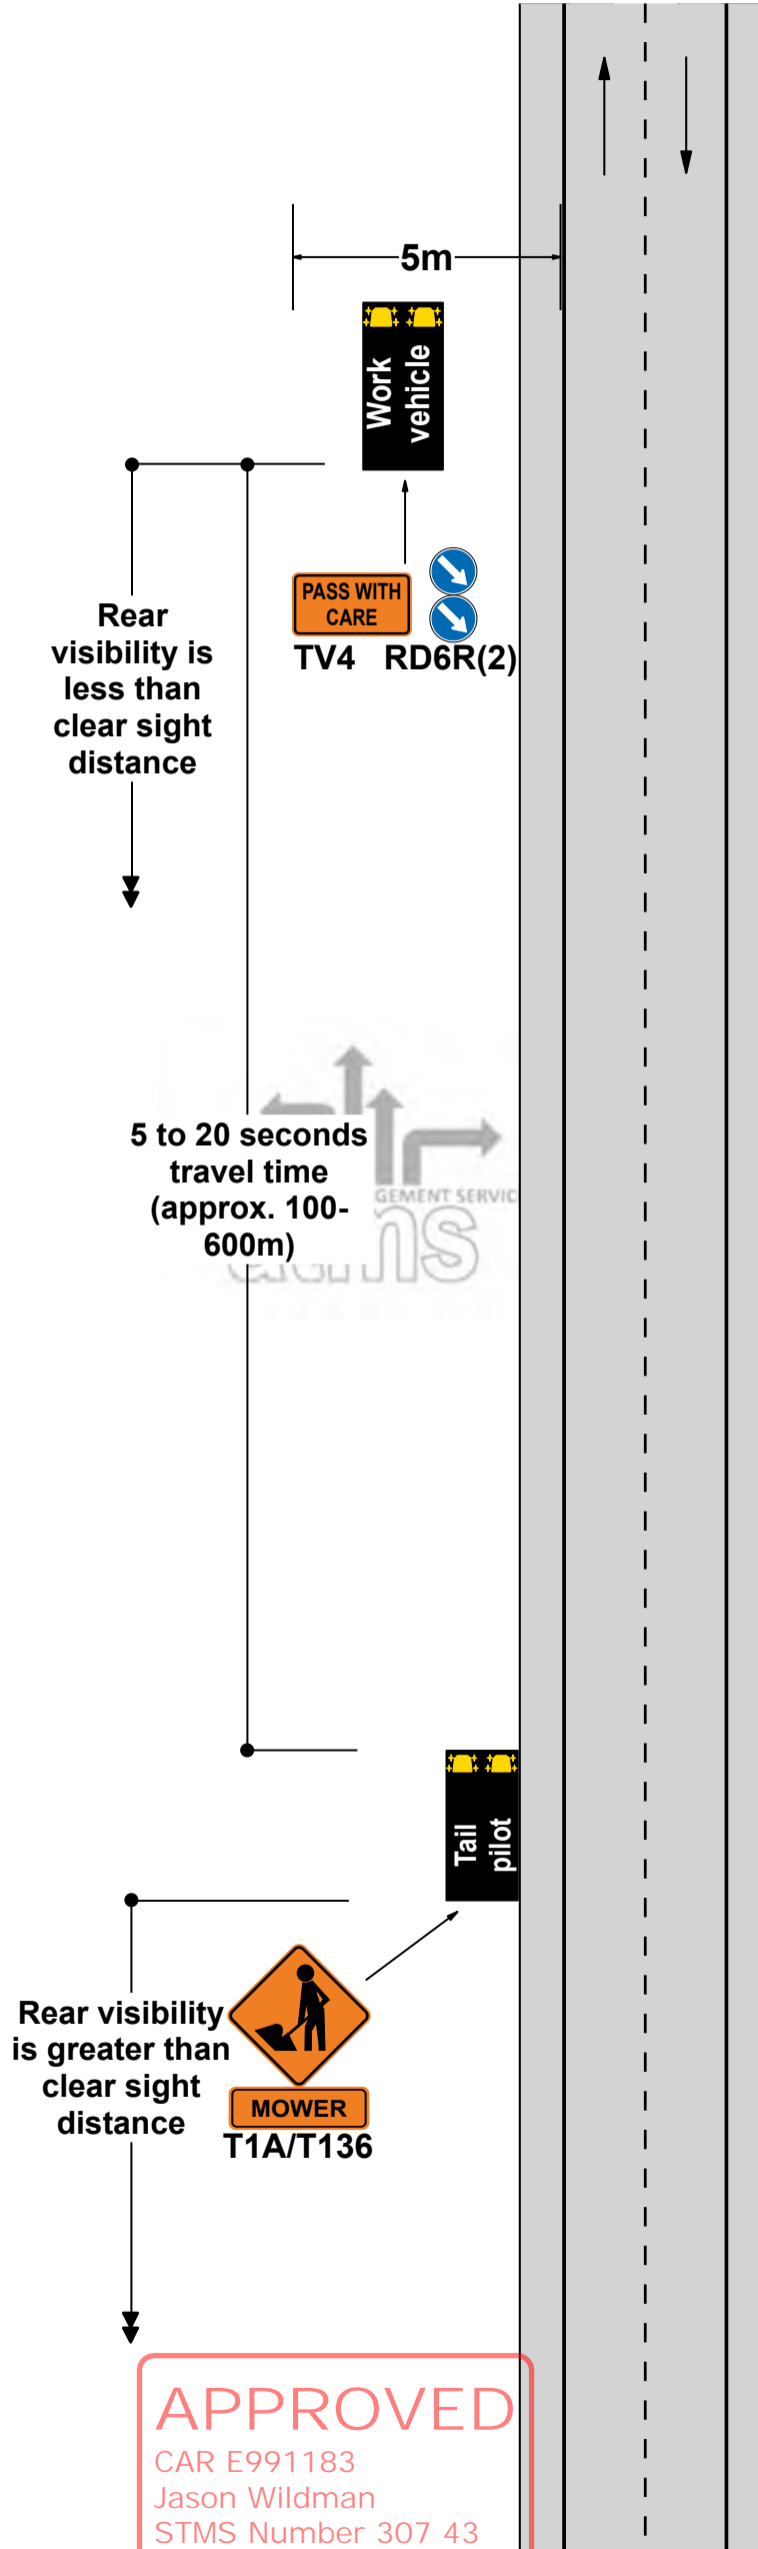


**APPROVED**  
 CAR E991183  
 Jason Wildman  
 STMS Number 307 43  
 Hutt City Council  
 18 December 2023

TWO-WAY TWO-LANE ROAD  
 Work vehicle is in a lane  
 Permanent speed under 65km/h

F4.4  
 Level 1

- Notes
1. Advance warning sign X may be replaced by tail pilot equipped with T1A advance warning sign and appropriate supplementary plate
  2. In this case, signs marked with Y do not need to be erected
  3. If using static advance warning signs and the operation is on the lane, then static advance warning signs must also be placed on any intersecting roads

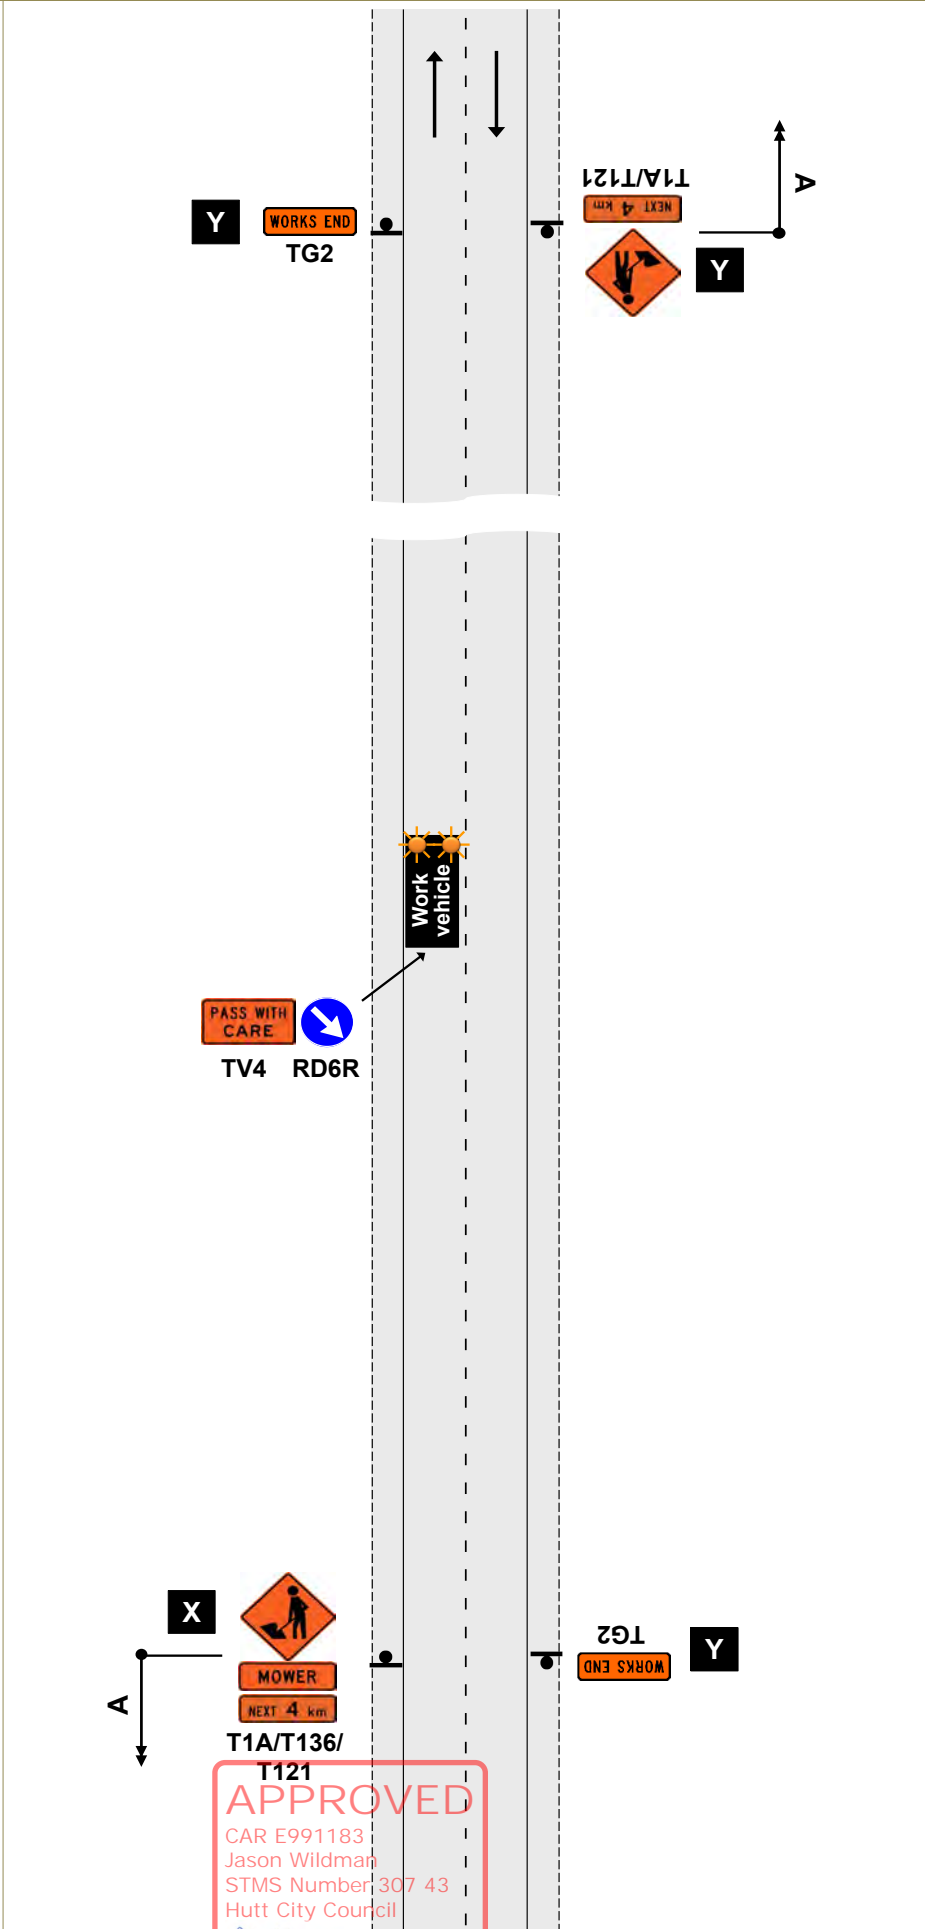

APPROVED  
 CAR E991183  
 Jason Wildman  
 STMS Number 307 43  
 Hutt City Council

*Jason Wildman*

18 December 2022



Mobile operations

**ONE-WAY TWO-LANE DIVIDED OR TWO-LANE ROAD**  
**Part or all of a lane occupied**  
**Semi-static closure - work for up to 1 hour**


**ATMS06**  
**Level 1**

Notes

1. Only use this TMD when activity can be completed within 1 hour (excluding set up and removal of worksite)
2. The T1A advance warning signs may be replaced by a tail pilot vehicle with a T1A sign, appropriate supplementary plate and a RD6R/L
3. If shadow vehicle is fitted with a TMA, the longitudinal safety zone (D) is not required
4. If using static advance warning signs and the operation is on the lane, then static advance warning signs must also be placed on any intersecting roads.
5. This site can be used on the opposite (left) lane also.

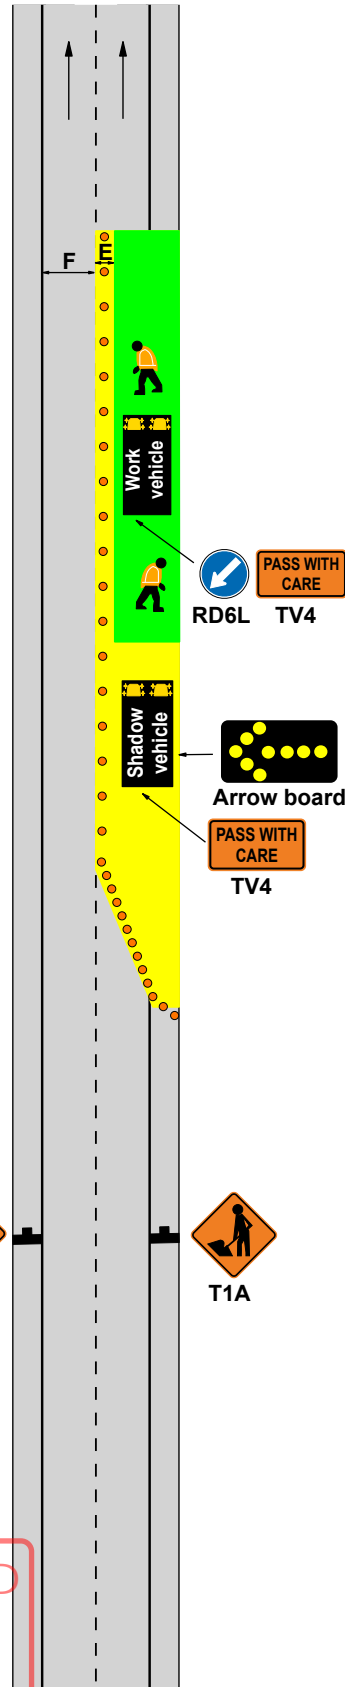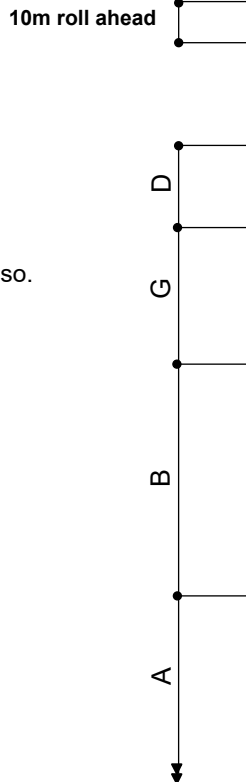

**APPROVED**  
 CAR E991183  
 Jason Wildman  
 STMS Number 307 43  
 Hutt City Council  
*Wildman*  
 18 December 2023

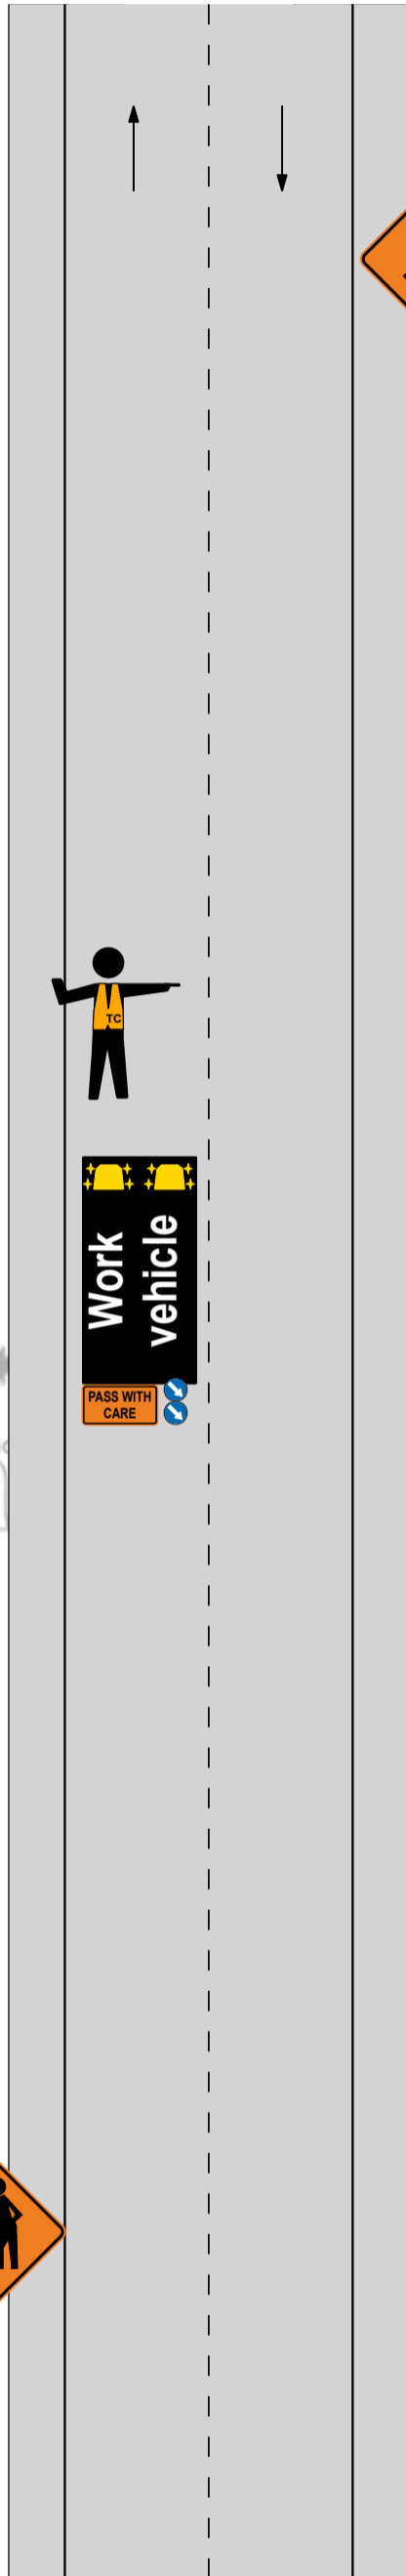

**Closure:** Level 1 Mobile Closure

**Level:** 1

**TMP Ref:** Mobile L1 - TTM Install/Removal

**APPROVED**

CAR E991183  
Jason Wildman  
STMS Number 307 43  
Hutt City Council

18 December 2023




CYCLE LANE  
Traffic not crossing road centre  
Diverted cycle lane

- Notes
1. Minimum cycle lane width must be:
    - 1m - 50km/h or less
    - 1.5m - 60km/h or more
  2. A minimum cycle lane width of 1.5m is required if the temporary cycle lane is uphill
  3. \*Calculation of taper length for lateral shift of less than 3.5m is:  

$$\frac{W \times G}{3.5}$$

W = Width of lateral shift  
 G = Taper length in metres from the level 1 layout distance table
  4. Use TSLs if required by TSL decision matrix
  5. The T144 X0km/h AHEAD sign is optional

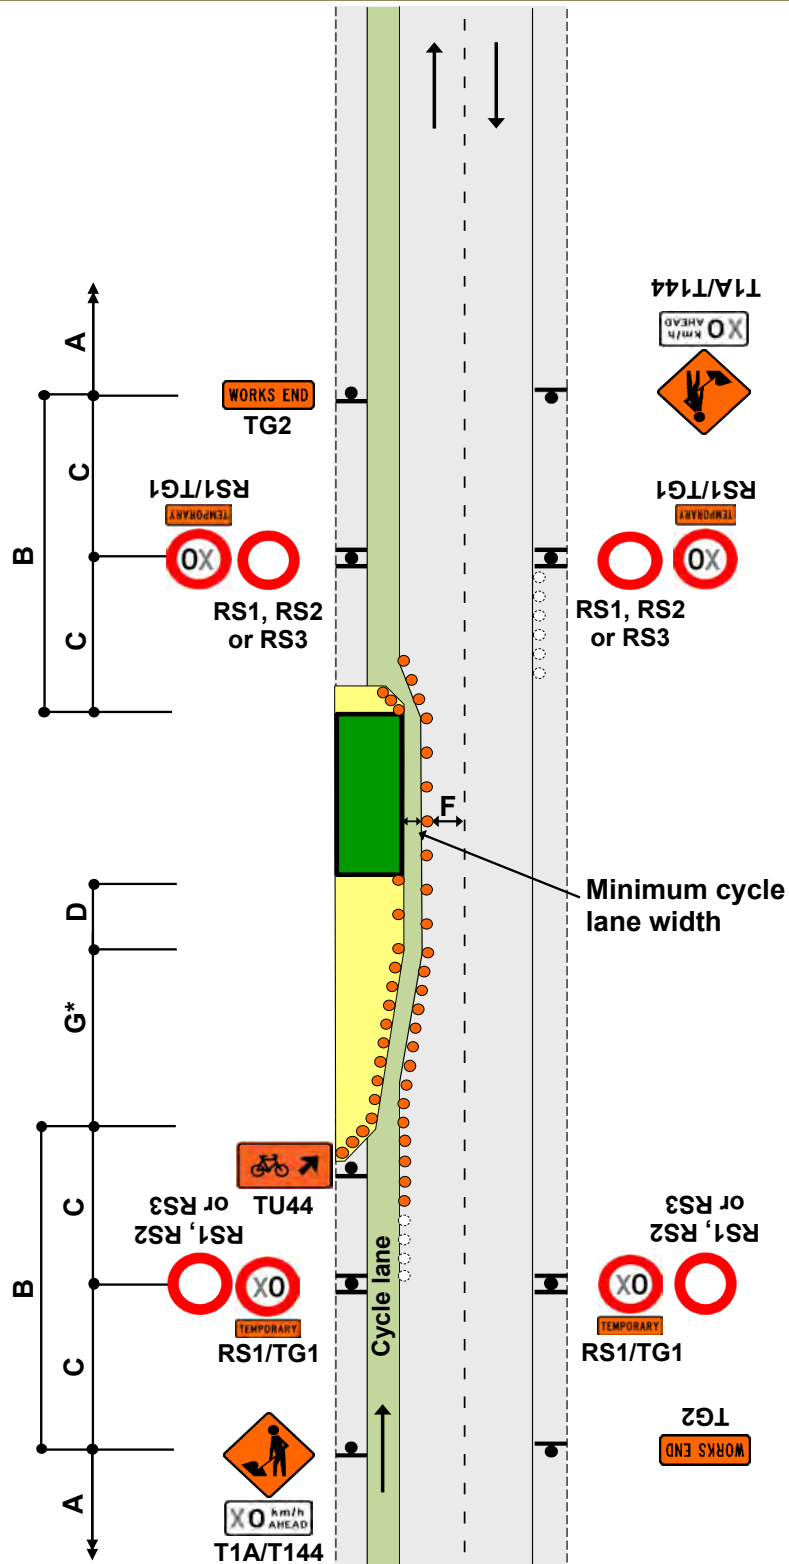

APPROVED  
 CAR E991183  
 Jason Wildman  
 STMS Number 307 43  
 Hutt City Council  
 J. Wildman  
 18 December 2022


**Static operations**

**CYCLE LANE**  
**Traffic crossing road centre**  
**Diverted cycle lane - coned lane control**

**F2.9**  
**Level 1**

**Notes**

1. Minimum cycle lane width must be:
  - 1m - 50km/h or less
  - 1.5m - 60km/h or more
2. A minimum cycle lane width of 1.5m is required if the temporary cycle lane is uphill
3. \*Calculation of taper length for lateral shift of less than 3.5m is:  
 $W \times G$   
 3.5  
 $W$  = Width of lateral shift  
 $G$  = Taper length in metres from the level 1 layout distance table
4. To allow heavy vehicles to manoeuvre, cones in the channel must be offset by at least 10m where the direction changes. Refer C8.2.12
5. Use TSLs if required by TSL decision matrix
6. The T144 X0km/h AHEAD sign is optional

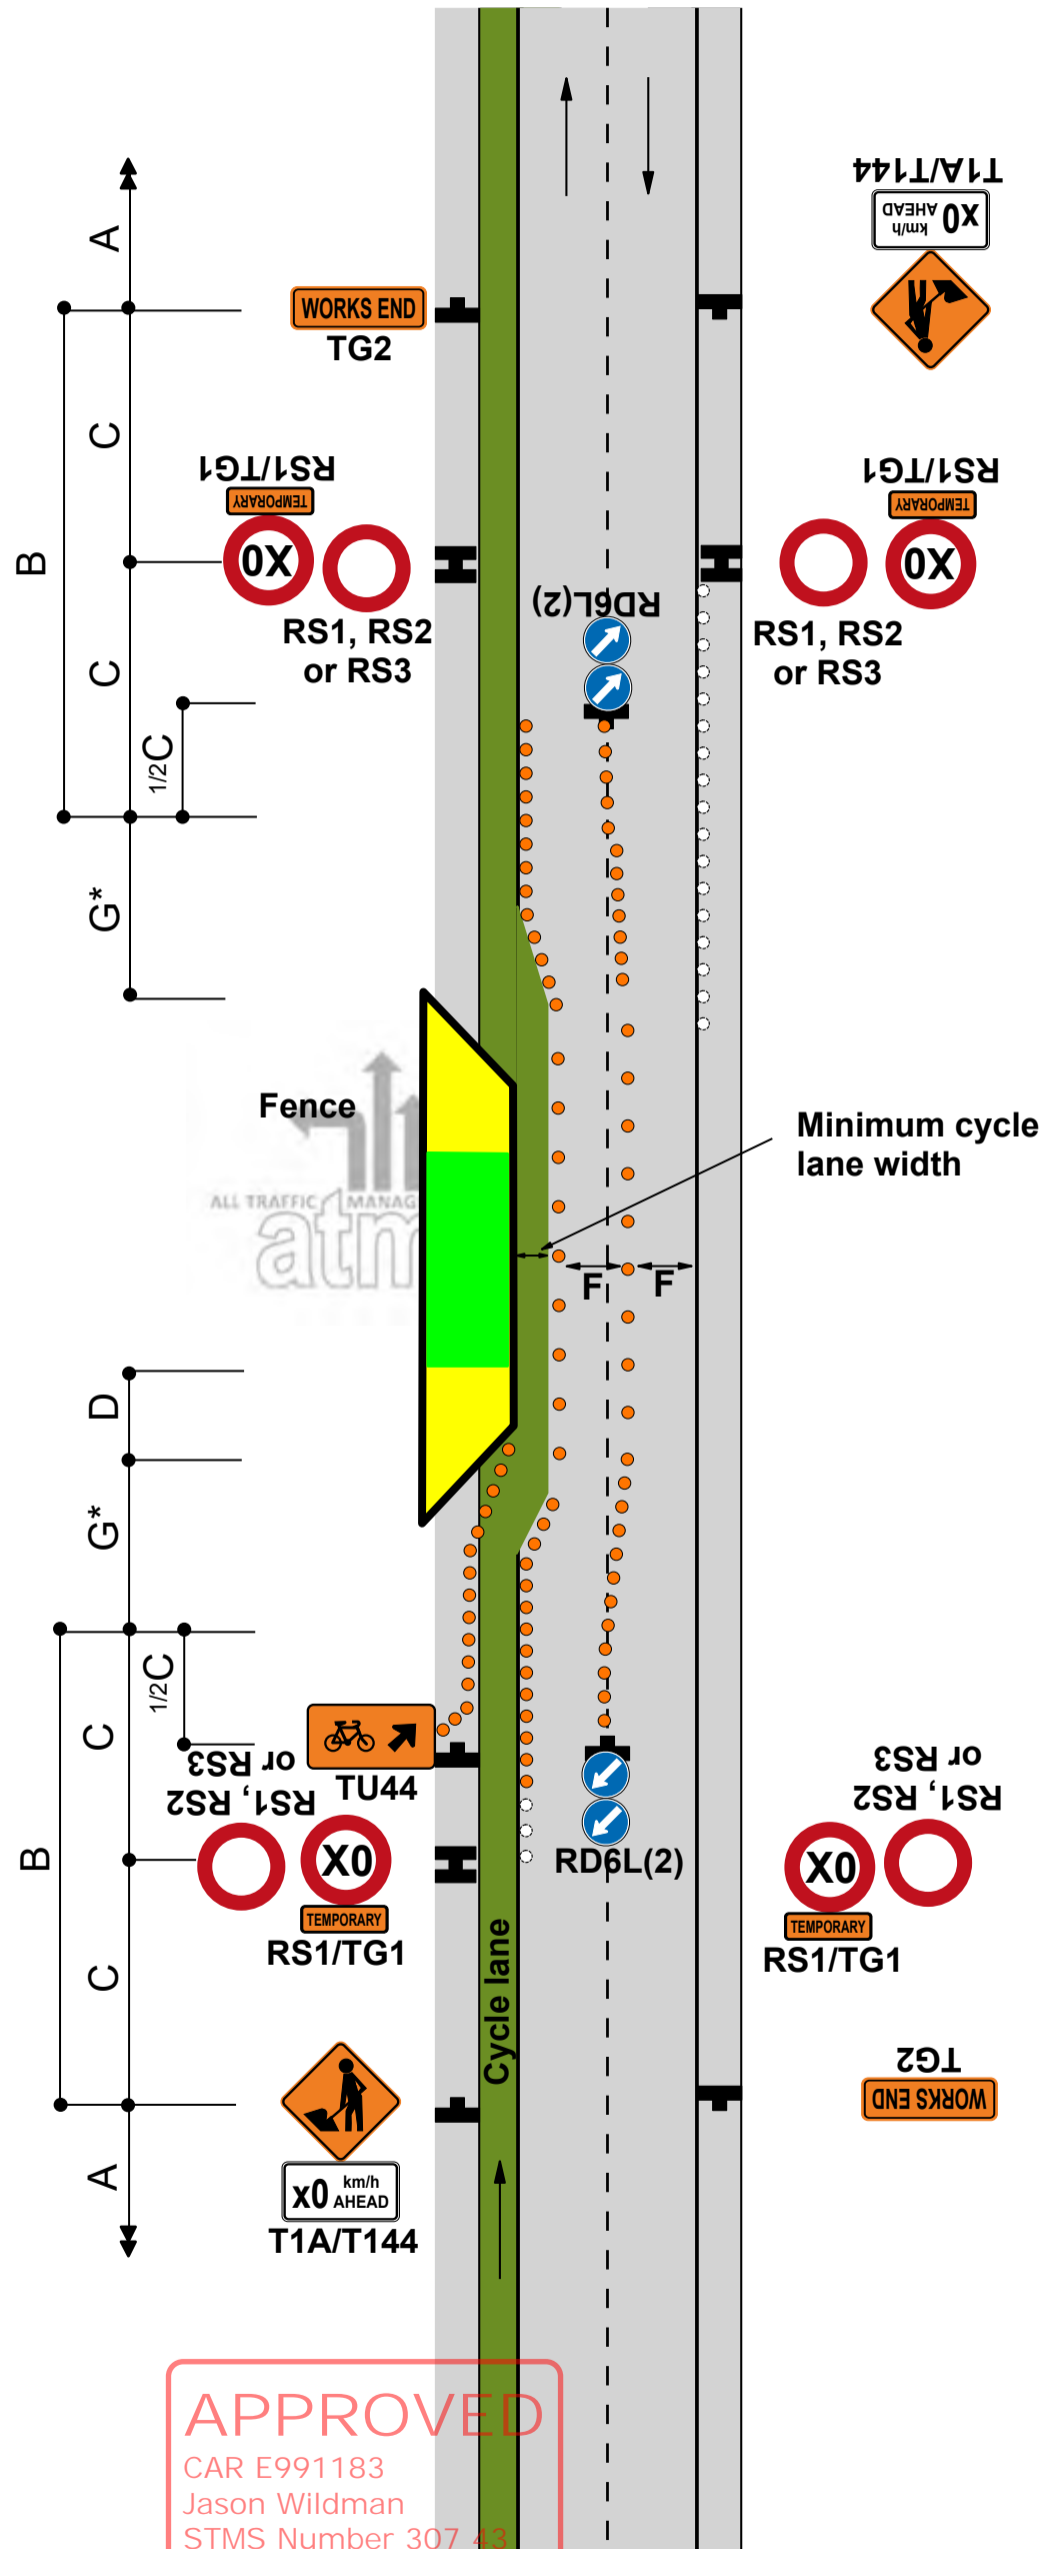

**APPROVED**  
 CAR E991183  
 Jason Wildman  
 STMS Number 307 43  
 Hutt City Council  
*Wildman*  
 18 December 2023



**Static operations**

**CYCLE LANE  
Cycle lane closed  
Portable e-STOP**

**ATMS03  
Level 1**

**Notes**

1. Merge of cycle lane with live lane must be delineated with cones at 1.0m centres for at least 10m
2. The T144 30km/h AHEAD sign is optional on roads under 65km/h
3. Signs and layout shown in the box at the bottom of the diagram is to be repeated on each approach that requires cycle lane signage. ATMS01 or ATMS02 to be used on all non cycle lane approaches.
3. Provide details of make and model of portable traffic signals in the TMP
4. Use PN11 no stopping signs, if necessary as per the approved TMP

5. Install temporary RP61/RP62 signs.




7. Extend or place extra advance warning signs towards on-coming traffic beyond any expected traffic queues.

8. CONTINGENCY PLAN:  
F2.14 or F2.22 to be implemented should issues arise with e-STOP/ adverse weather conditions or where stop go is unsuitable. ex; Short term stoppages is defined as "stopping traffic for a short period of time within a static site, at inconsistent intervals to assist with the entry/exit of vehicles or small tasks required to be undertaken in the live lane".


9. In circumstances where for safety reasons, the use of stop/go operations is deemed more appropriate, a site specific safe work method statement must be prepared.

10. e-STOP can only be used on an attended site. e-STOPS must be manned at all times.

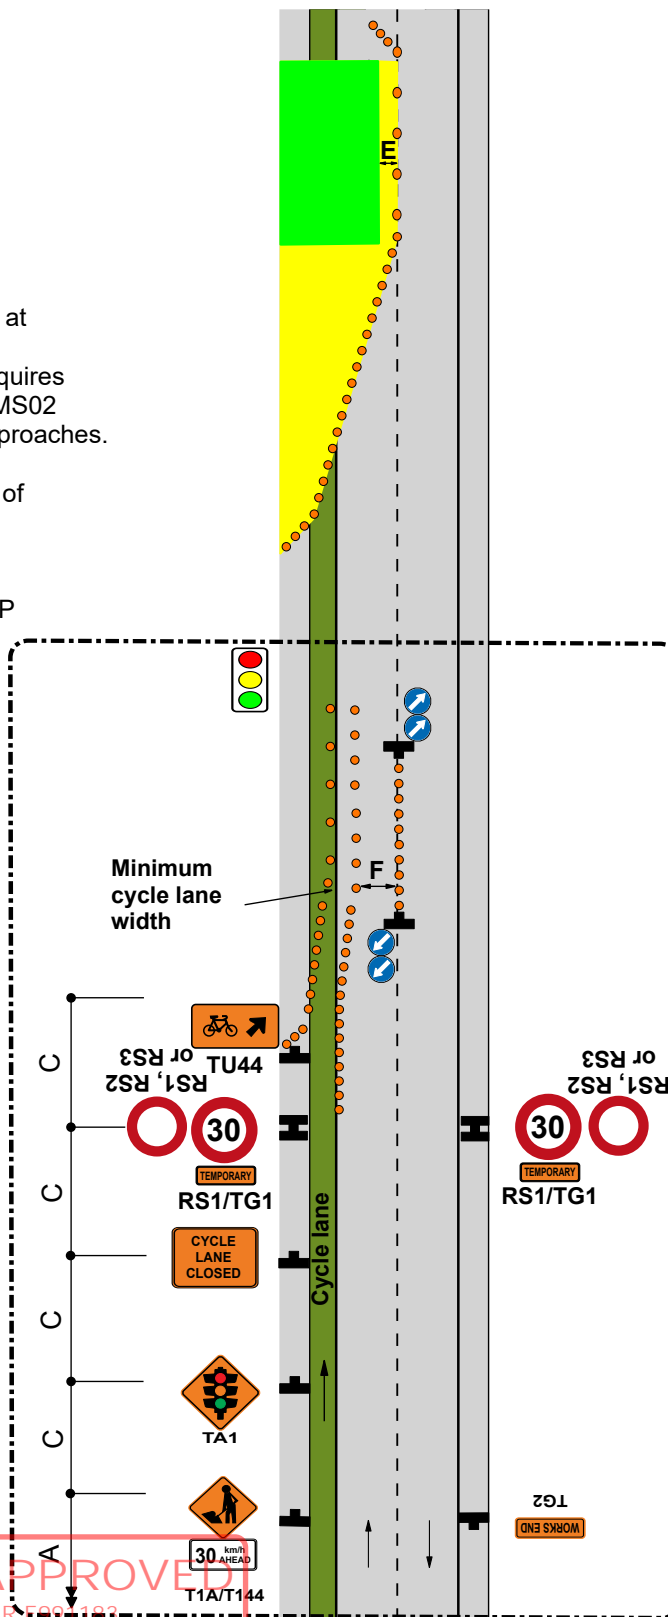

Signs and layout to be repeated on each cycle lane approach Follow ATMS01 & ATMS02 for non cycle lane approaches.

**APPROVED**  
CAR 199-183  
Jason Wildman  
STMS Number 307 43  
Hutt City Council  
*Wildman*  
18 December 2023

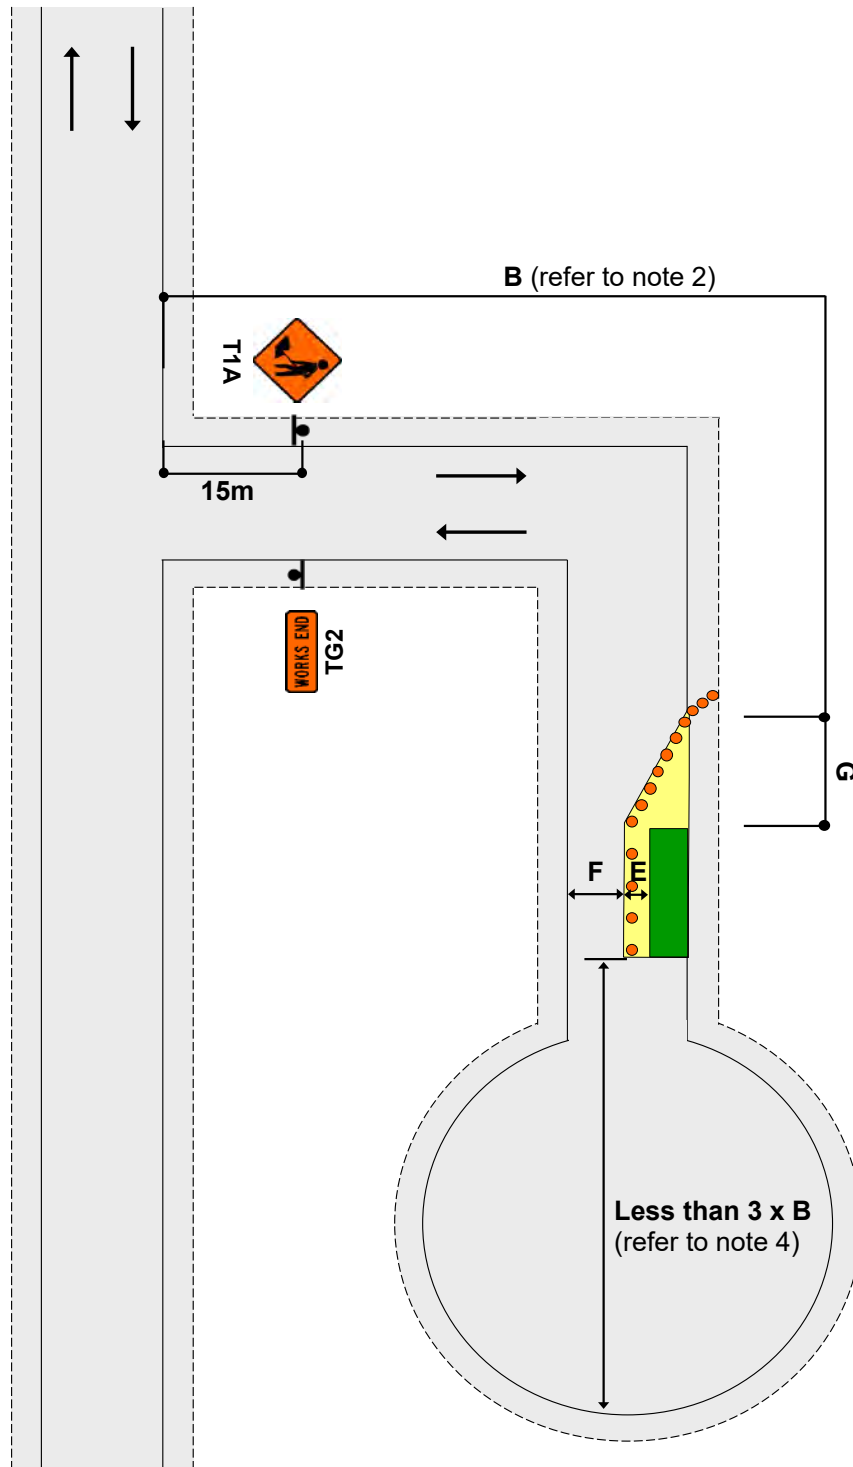

Notes

1. T1A sign to be placed at least 15m from the intersection
2. Where less than B, T1A/T135 and TG2 signs required on main road
3. Working space to be less than 100m
4. Signage is not required past the worksite where there is less than 3 x B from the end of the working space to the end of the road


APPROVED

CAR E991183  
Jason Wildman  
STMS Number 307 43  
Hutt City Council

18 December 2023

TWO-WAY TWO-LANE ROAD - Intersection or roundabout  
 Major obstruction close to intersection  
 Allows shorter sign spacings and MTC operation


J2.19a  
 Level 1

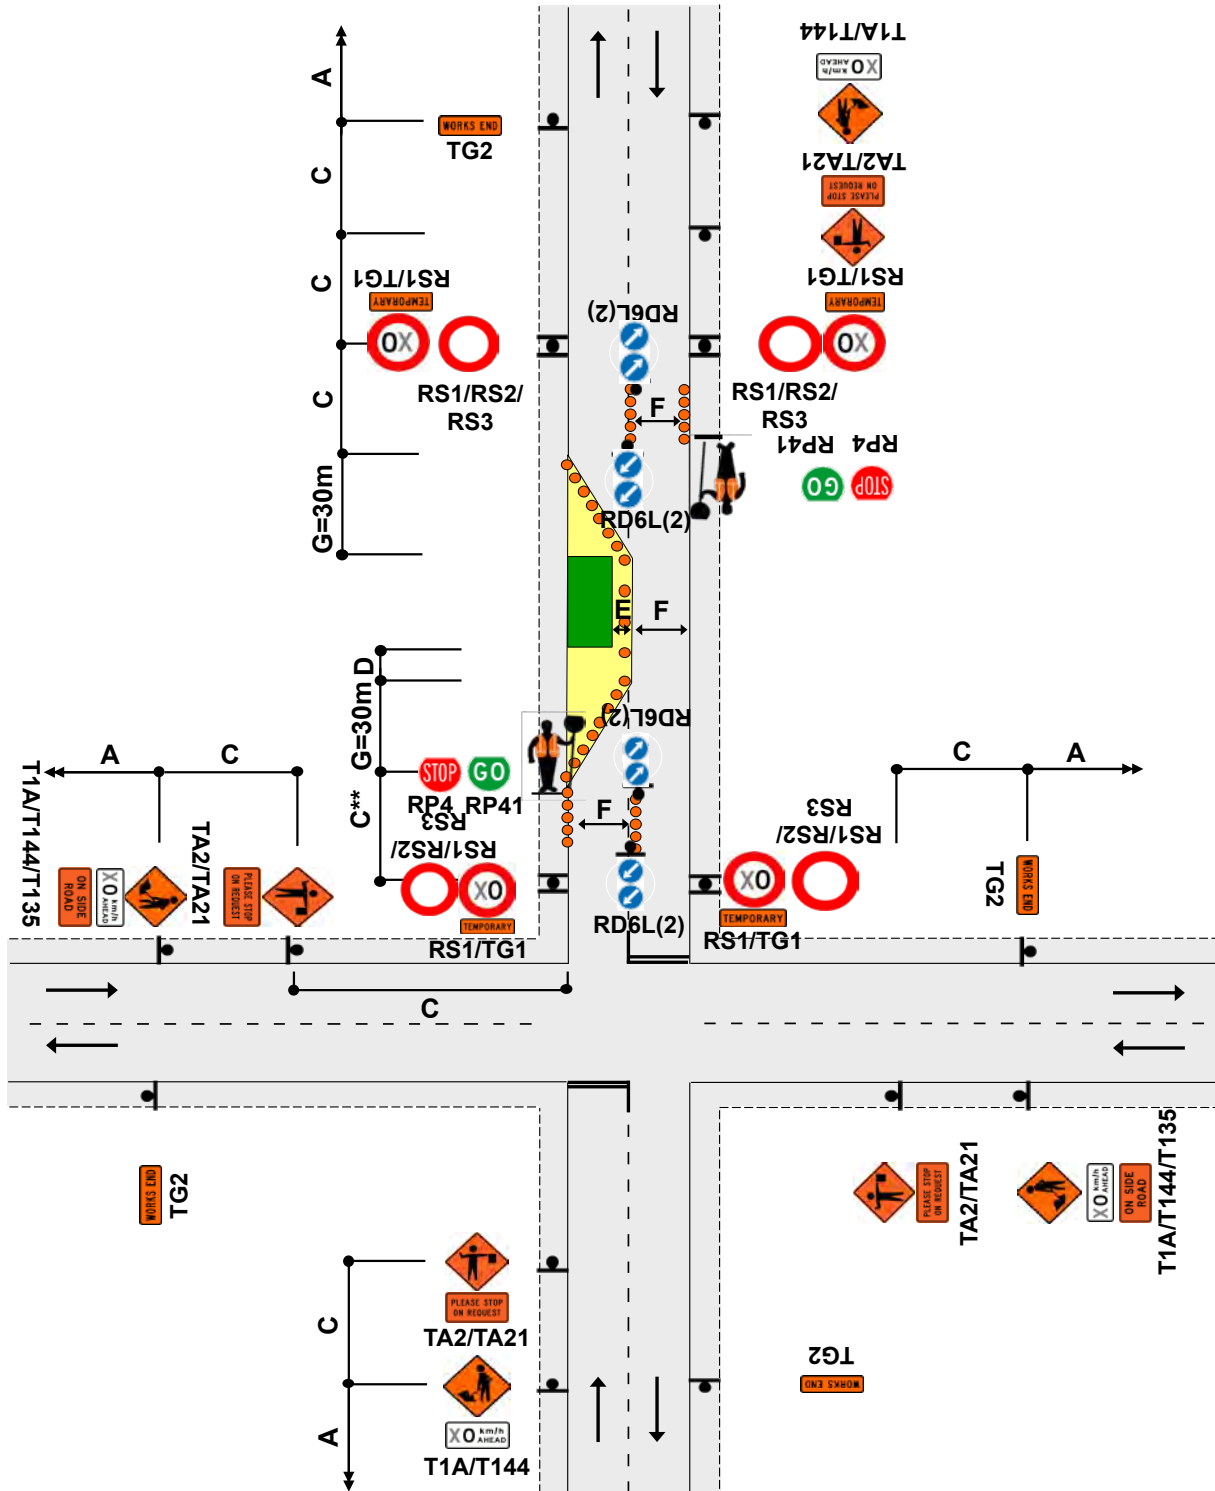

- Notes
1. Sign spacing of TSL at the intersection can be reduced as per the table shown
  2. This diagram may be used at a T intersection by removing any one of the roads
  3. MTC at intersection to be in charge of MTC operation
  4. Use TSLs as required by TSL decision matrix
  5. The T144 30km/h AHEAD sign is optional

C**	DISTANCE		
	Speed (PSL)	Intersection to TSL	TSL to taper
<50km/h	15m	15m	30m
60km/h	15m	25m	40m
>70km/h	15m	40m	55m

APPROVED  
 CAR E991183  
 Simon Wildman  
 STMS Number 307 43  
 Hutt City Council

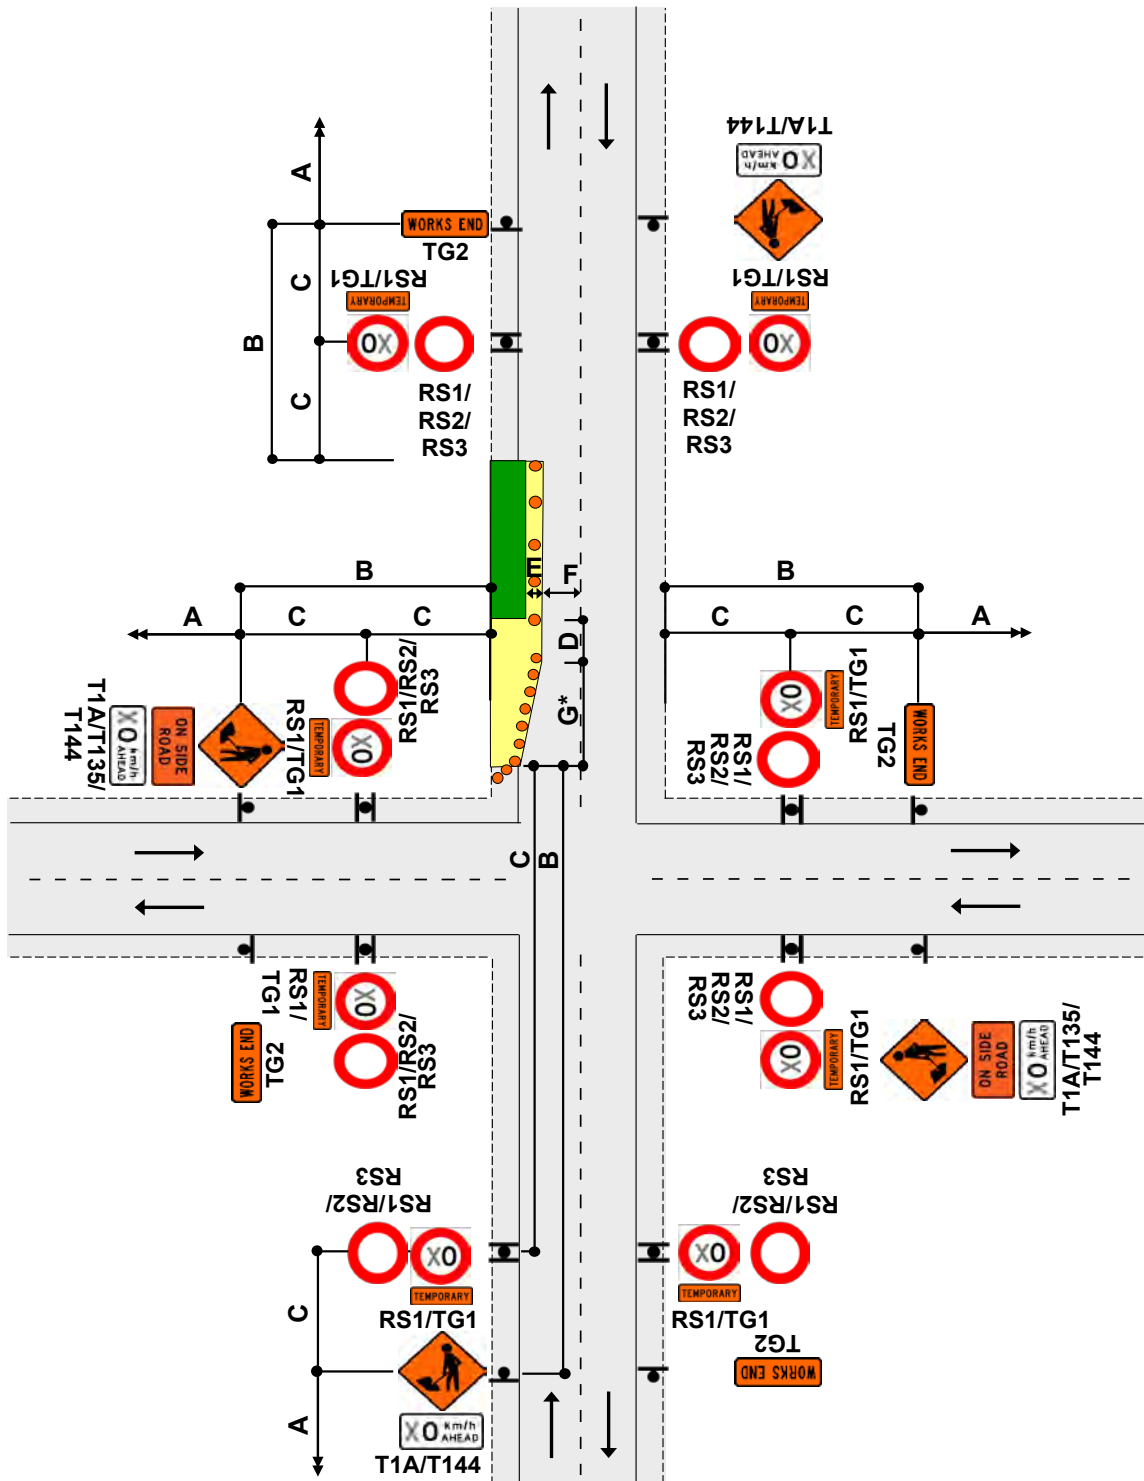


Notes

1. This diagram may be used at a T intersection by removing any one of the roads.
2. Taper length may be reduced by adding a RD6R sign
3. \*Calculation of taper length for lateral shift of less than 3.5m is:

$$\frac{W \times G}{3.5}$$


W = Width of Shoulder G = Taper length in metres from the level 1 layout distance table

4. Use TSLs if required by TSL decision matrix
5. The T144 X0km/h AHEAD sign is optional



APPROVED

CAP E991183  
J. J. Aldman  
STMS Number 307 43  
Hutt City Council

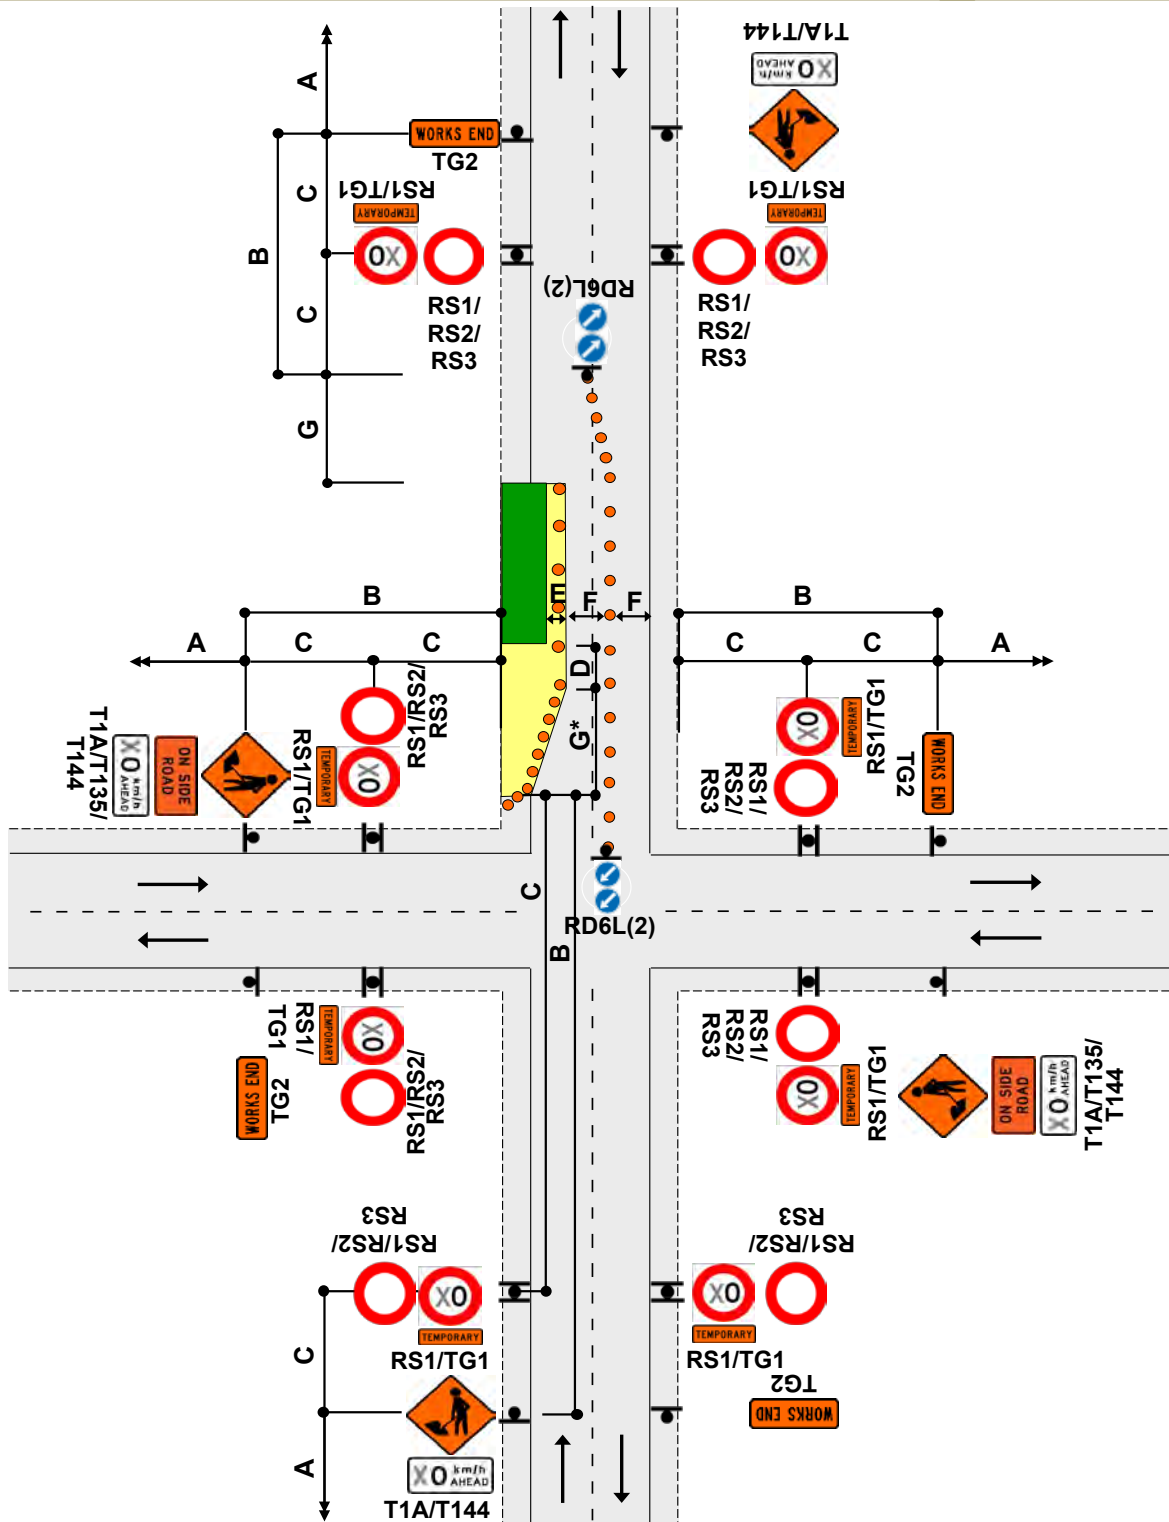


Notes

1. This diagram may be used at a T intersection by removing any one of the roads
2. Taper length may be reduced by adding a RD6R sign
3. \*Calculation of taper length for lateral shift of less than 3.5m is:

$$\frac{W \times G}{3.5}$$


W = Width of Shoulder G = Taper length in metres from the level 1 layout distance table

4. Use TSLs if required by TSL decision matrix
5. The T144 X0km/h AHEAD sign is optional



APPROVED

C. Miller 1183  
 Joseph Wildman  
 STMS Number 307 43  
 Hutt City Council  
 18 December 2023

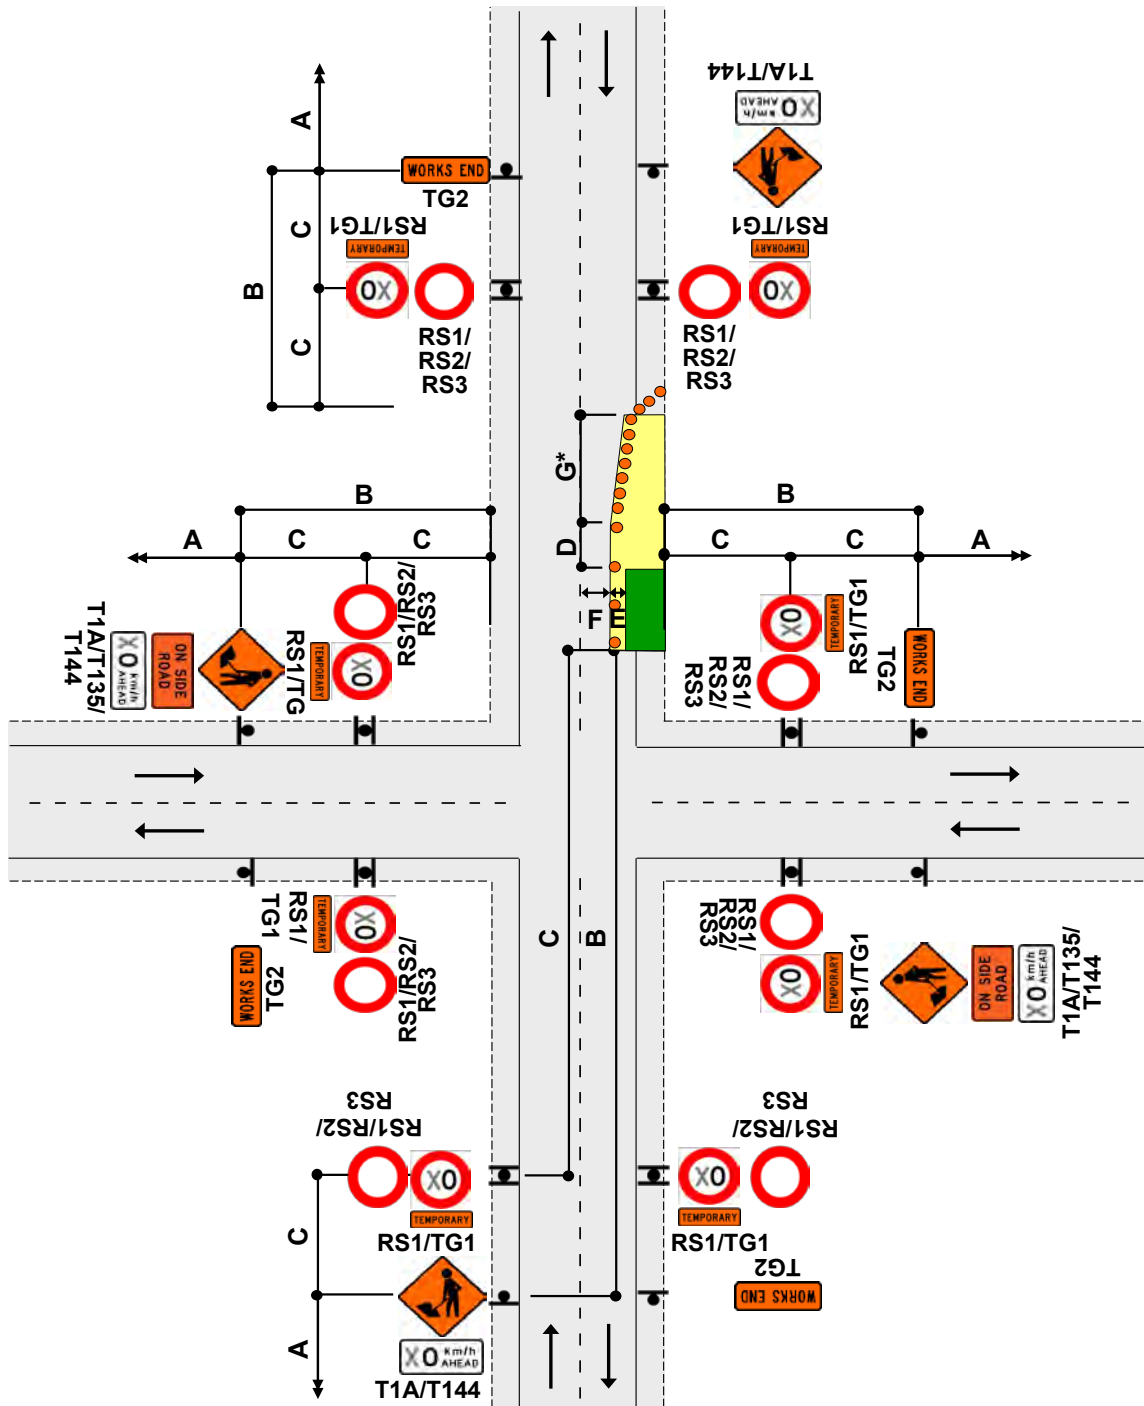


Notes

1. This diagram may be used at a T intersection by removing any one of the roads
2. Taper length may be reduced by adding a RD6R sign
3. \*Calculation of taper length for lateral shift of less than 3.5m is:

$$\frac{W \times G}{3.5}$$


W = Width of Shoulder G = Taper length in metres from the level 1 layout distance table

4. Use TSLs if required by TSL decision matrix
5. The T144 X0km/h AHEAD sign is optional



APPROVED

CAR E991183  
Jason Wildman  
STMS Number 307 43  
Hutt City Council

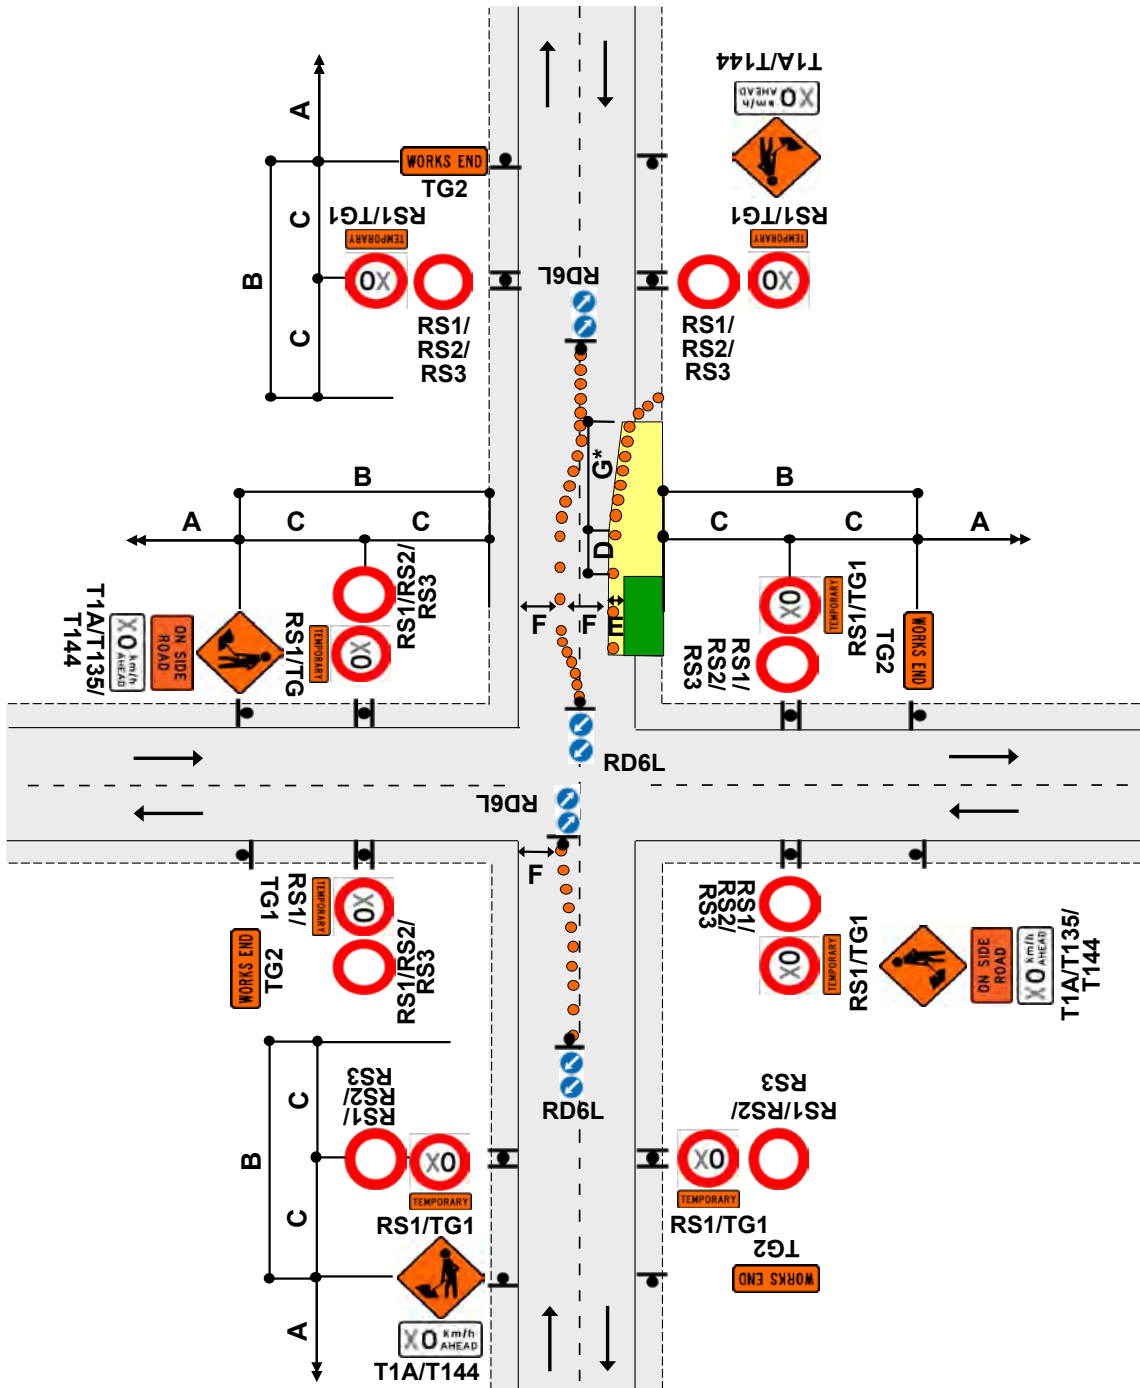

Notes

1. This diagram may be used at a T intersection by removing any one of the roads
2. \*Calculation of taper length for lateral shift of less than 3.5m is:


$$\frac{W \times G}{3.5}$$

3.5

W = Width of lane G = Taper length in metres from the level 1 layout distance table

3. Install shifting taper to move road users into the new alignment
4. Use TSLs if required by TSL decision matrix
5. The T144 X0km/h AHEAD sign is optional

APPROVED  
CAB E991183  
Jason Wildman  
STMS Number 307 43  
Hutt City Council  
*Jason Wildman*  
18 December 2023

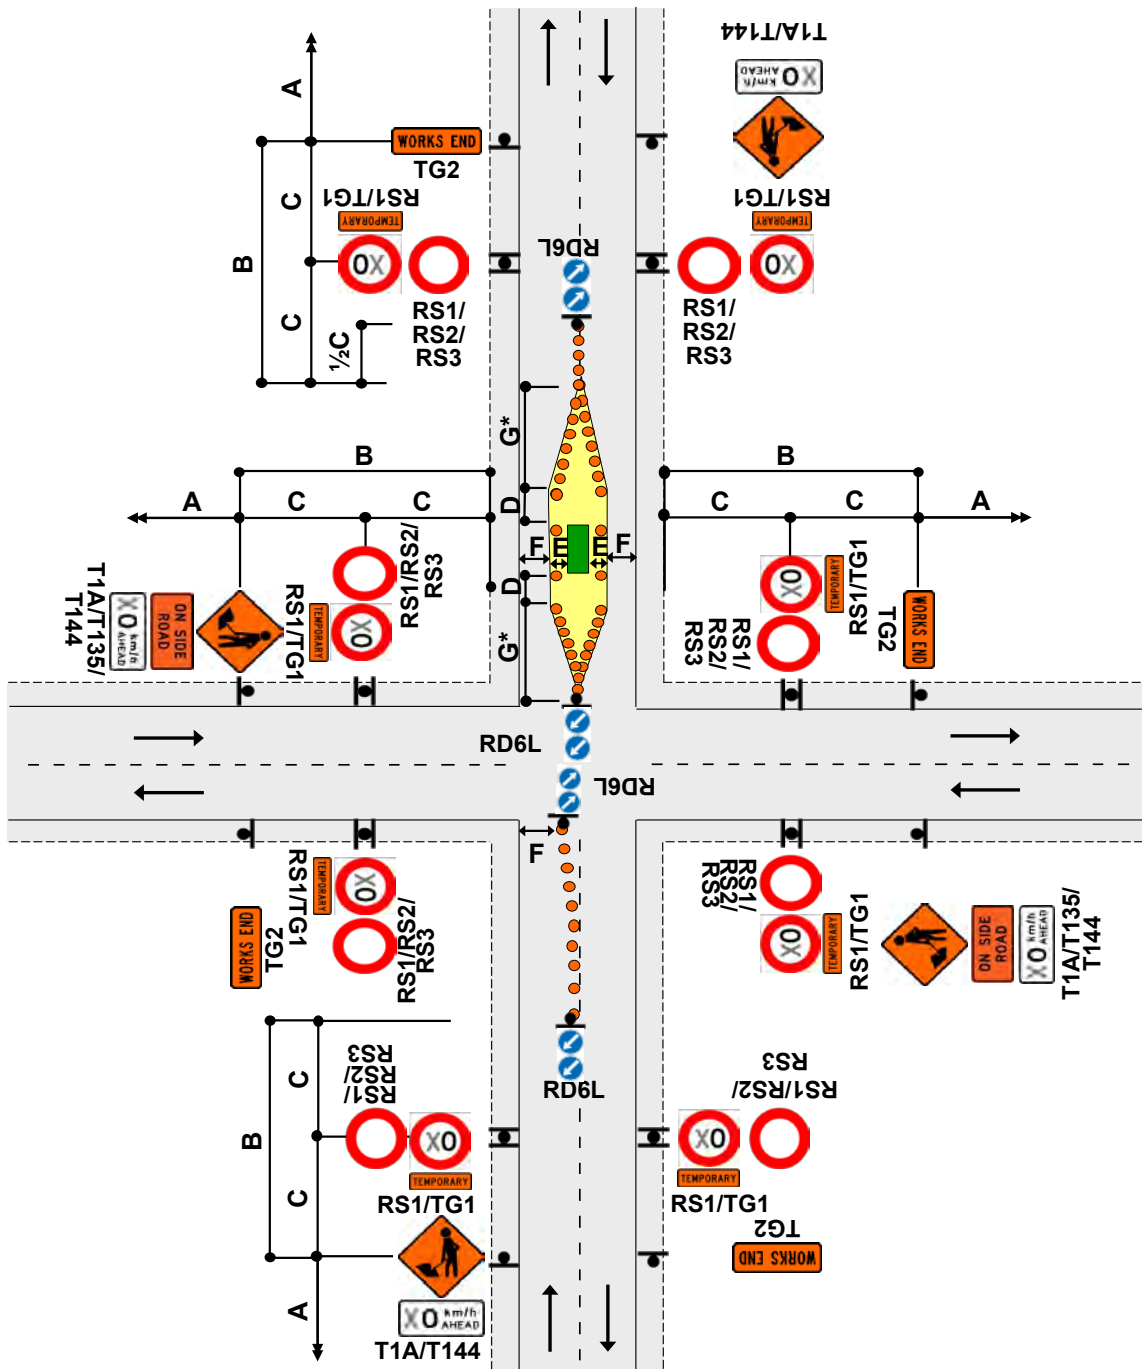

Notes

1. This diagram may be used at a T intersection by removing any one of the roads
2. \*Calculation of taper length for lateral shift of less than 3.5m is:

$$\frac{W \times G}{3.5}$$

W = Width of lane G = Taper length in metres from the level 1 layout distance table

3. Install shifting taper to move road users into the new alignment
4. Use TSLs if required by TSL decision matrix
5. The T144 X0km/h AHEAD sign is optional

APPROVED

CAR E991183  
Jason Wildman  
STMS Number 307 43  
Hutt City Council